

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-. - .

© COPYRIGHT - BY - Taipei, Taiwan

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HY

-

P

LTR

DESCRIPTION

DATE

DWN

APVD


A

FIRST ISSUE

12,AUG,11'

SW

WW

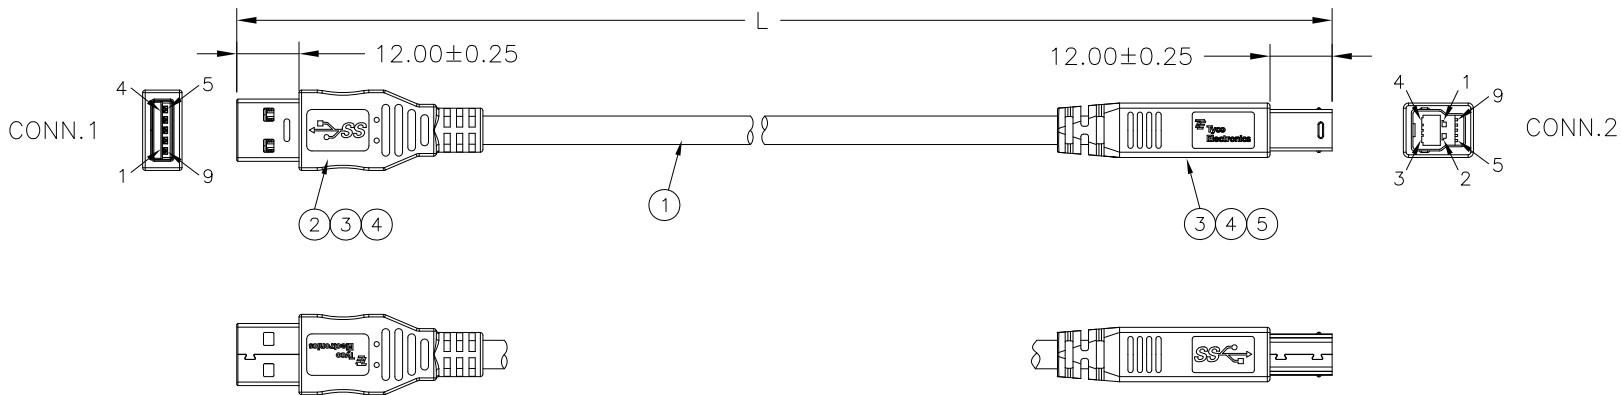


| PIN ASSIGNMENT | | |
|----------------|------------|--------|
| CONN.1 | COLOR | CONN.2 |
| 1 | RED | 1 |
| 2 | WHITE | 2 |
| 3 | GREEN | 3 |
| 4 | BLACK | 4 |
| 5 | BLUE | 5 |
| 6 | YELLOW | 6 |
| 7 | DRAIN WIRE | 7 |
| 8 | PURPLE | 8 |
| 9 | ORANGE | 9 |
| SHELL | BRAID | SHELL |

TEST ALL PRODUCTS AS BELOW:
 100% OPEN & SHORT TEST.
 CONTACT RESISTANCE:3 OHM MAX.
 INSULATION RESISTANCE:10 MOHM MIN.
 WITHSTANDING VOLTAGE 300V(DC) 0.1sec.

| | |
|-------------|---------|
| 1-2117154-0 | 1000±20 |
| PART NUMBER | L |

| QTY | U/M | DESCRIPTION | ITEM |
|-----|-----|---|------|
| 1 | PC | USB 3.0 PLUG, B TYPE, AU PLATED 30u" FOR CONTACT AREA | 5 |
| AR | MR | COPPER FOIL TAPE | 4 |
| AR | KG | OVER MOLDED PVC, COLOR: BLACK. | 3 |
| 1 | PC | USB 3.0 PLUG, A TYPE, AU PLATED 30u" FOR CONTACT AREA | 2 |
| AR | MR | USB 3.0 CABLE, OD=4.5 (1P*32#+D+AL+Mylar)*2C+1P*32#+2C*26#+AL+B /UL20276 | 1 |

| | | | | |
|--|--|--------------------------------|---|-------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S. WU 12,AUG,2011 |  TE Connectivity | |
| DIMENSIONS: MM | | CHK CP. ONG 12,AUG,2011 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 3' | | APVD W. WANG 12,AUG,2011 | NAME | |
| MATERIAL SEE NOTE | | PRODUCT SPEC | USB 3.0 A to B Cable Ass'y | |
| FINISH SEE NOTE | | QUALIFICATION TEST REPORT | SIZE A3 | RESTRICTED TO - |
| | | WEIGHT | CAGE CODE 00779 | DRAWING NO C=2117154 |
| | | CUSTOMER DRAWING | SCALE - | SHEET 1 OF 2 |
| | | | | REV A |

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-. - .

© COPYRIGHT - BY - Taipei, Taiwan

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HY

-

P

LTR

DESCRIPTION

DATE

DWN

APVD


A

FIRST ISSUE

12,AUG,11'

SW

WW

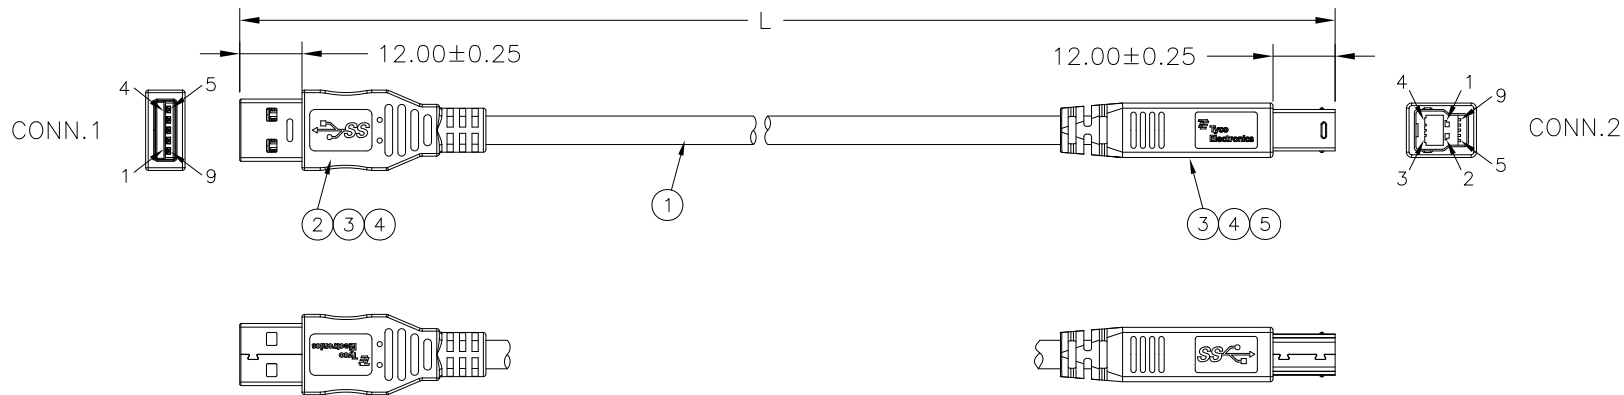



| PIN ASSIGNMENT | | |
|----------------|------------|--------|
| CONN.1 | COLOR | CONN.2 |
| 1 | RED | 1 |
| 2 | WHITE | 2 |
| 3 | GREEN | 3 |
| 4 | BLACK | 4 |
| 5 | BLUE | 5 |
| 6 | YELLOW | 6 |
| 7 | DRAIN WIRE | 7 |
| 8 | PURPLE | 8 |
| 9 | ORANGE | 9 |
| SHELL | BRAID | SHELL |

TEST ALL PRODUCTS AS BELOW:
 100% OPEN & SHORT TEST.
 CONTACT RESISTANCE:3 OHM MAX.
 INSULATION RESISTANCE:10 MOHM MIN.
 WITHSTADING VOLTAGE 300V(DC) 0.1sec.

| | |
|-------------|---------|
| 2-2117154-0 | 2000±20 |
| 1-2117154-5 | 1500±20 |
| PART NUMBER | L |

| QTY | U/M | DESCRIPTION | ITEM |
|-----|-----|---|------|
| 1 | PC | USB 3.0 PLUG, B TYPE, AU PLATED 30u" FOR CONTACT AREA | 5 |
| AR | MR | COPPER FOIL TAPE | 4 |
| AR | KG | OVER MOLDED PVC, COLOR: BLACK | 3 |
| 1 | PC | USB 3.0 PLUG, A TYPE, AU PLATED 30u" FOR CONTACT AREA | 2 |
| AR | MR | USB 3.0 CABLE, OD=5.5 (1P*28#+D+AL+Mylar)*2C+1P*28#+2C*24#+AL+B /UL20276 | 1 |

| | | | | |
|--|--|--------------------------------|---|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S. WU 12,AUG,2011 |  TE Connectivity | |
| DIMENSIONS: MM | | CHK CP. ONG 12,AUG,2011 | | |
|  | | APVD W. WANG 12,AUG,2011 | USB 3.0 A to B Cable Ass'y | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 3' | | PRODUCT SPEC | QUALIFICATION TEST REPORT | RESTRICTED TO |
| MATERIAL SEE NOTE | | WEIGHT | SIZE A3 | CAGE CODE 00779 |
| FINISH SEE NOTE | | DRAWING NO C=2117154 | | SCALE - |
| CUSTOMER DRAWING | | | SHEET 2 OF 2 | REV A |