



△数	訂正事項	擔當	檢圖	年月日	△数	訂正事項	擔當	檢圖	年月日
COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE
1	RE-6-1150	K.I.Y	L.S.M	18. 07. 04					
1	RE-6-1579	K.I.Y	L.S.M	20. 01. 23					





RECOMMENDED LAND PATTERN (FREE)
 (PCB THICKNESS t=1.6mm)

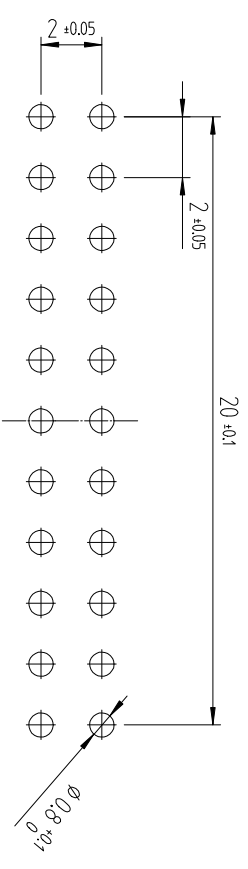

POLARIZATION MARK

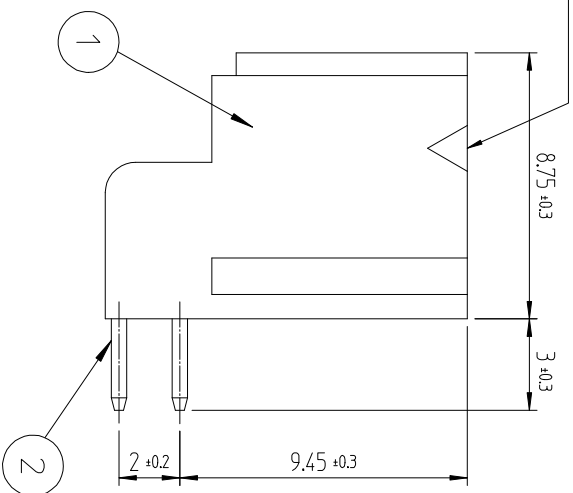

ENGAGEMENT FIGURE (2:1)

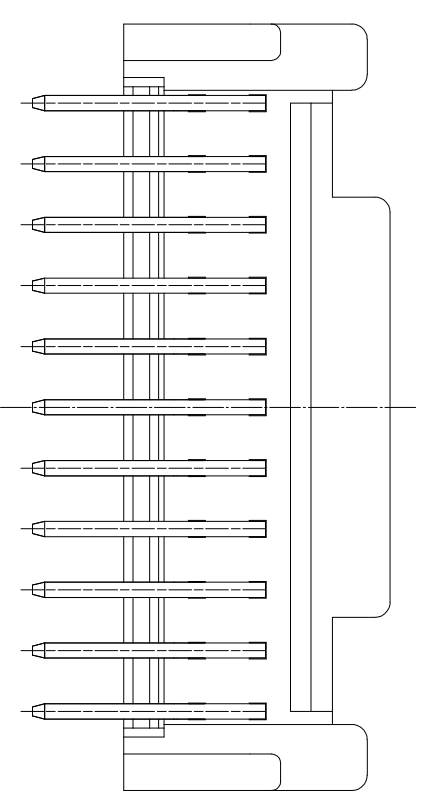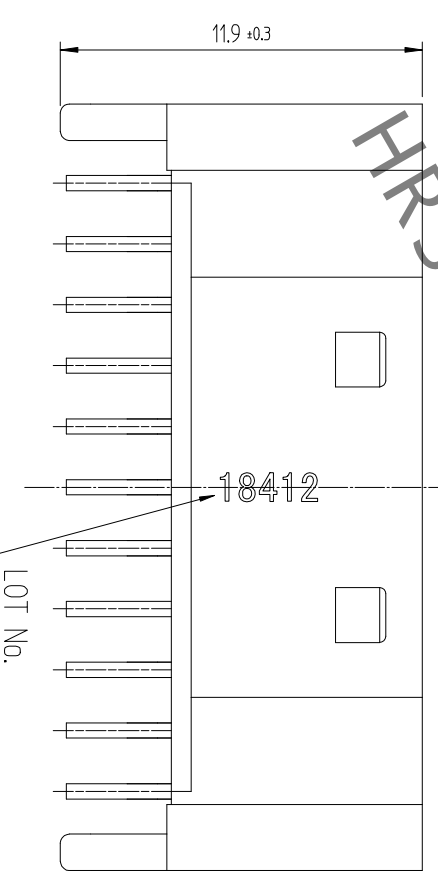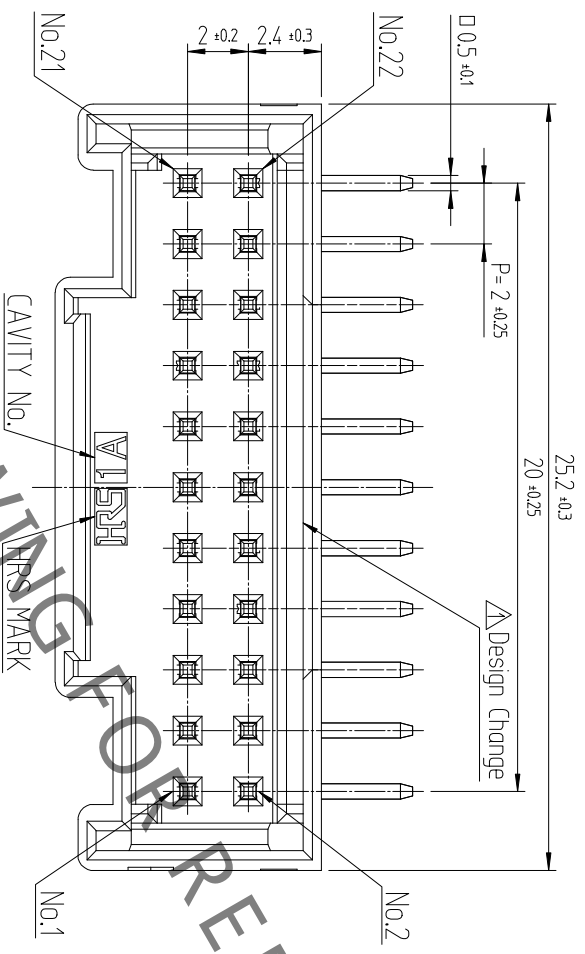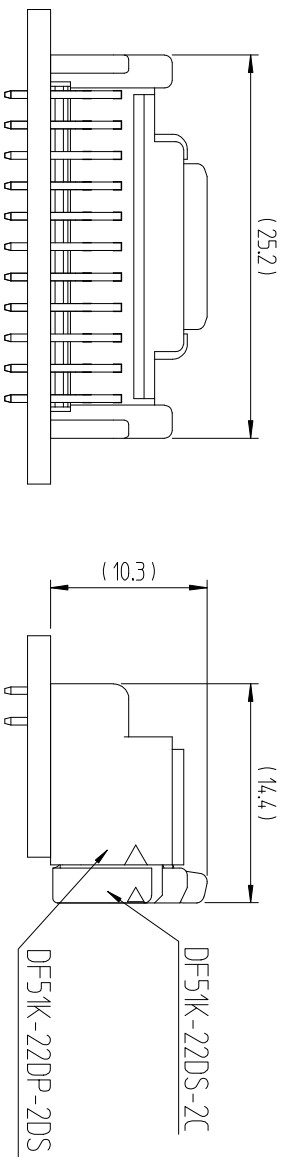

NOTE 1. 1PACK CONTAINS 120PCS.

2. () DIMENSIONS ARE ONLY REFERENCE.

△ 3. UL(IE No. E132750) AUTHORIZATION ARTICLE.

C-UL(IE No. E132750) AUTHORIZATION ARTICLE.



1	PBT	UL94V-0, BLACK	2	BRASS	TIN PLATING 1μm MIN, OVER NICKEL 0.5μm MIN
NO.		MATERIAL		FINISH,REMARKS	
CODE NO. (OLD)					
DRAWN			DESIGNED		
CHOI J.S		CHOI J.S		LIM S.M	
CHECKED			APPROVED		
CHOI J.S		KANG T.S		ENG DEPT	
SCALE 4:1			RELEASED		
UNITS mm			20.02.12		
DRAWING NO. EDC3-632485			PART NO. DF51K-22DP-2DS (800)		
HRS HIROSE KOREA CO.,LTD.			CODE NO. CL 6652-0049-8-800		
			1/1		