

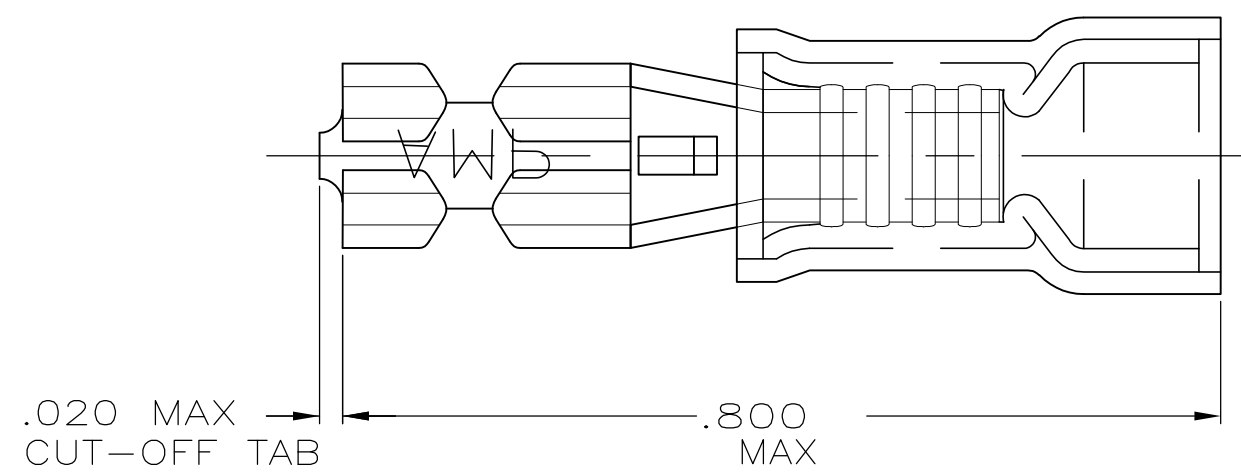


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		G1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

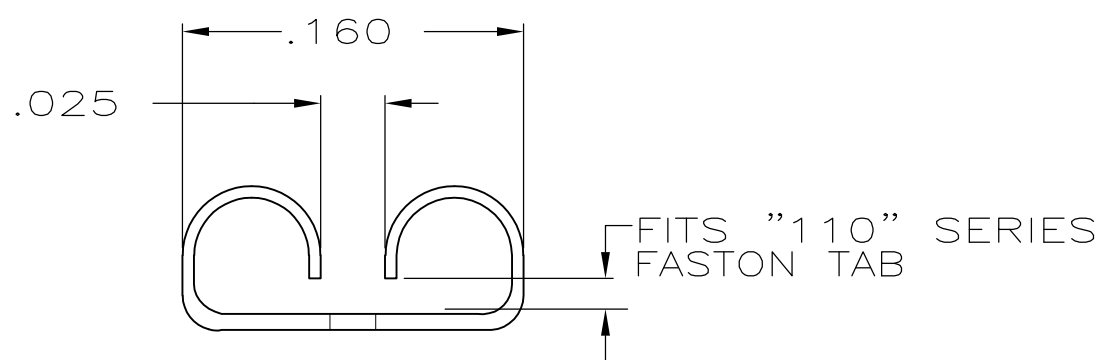

1. INSULATION DIA
.170 MAX
2. FITS TAB .020 THK

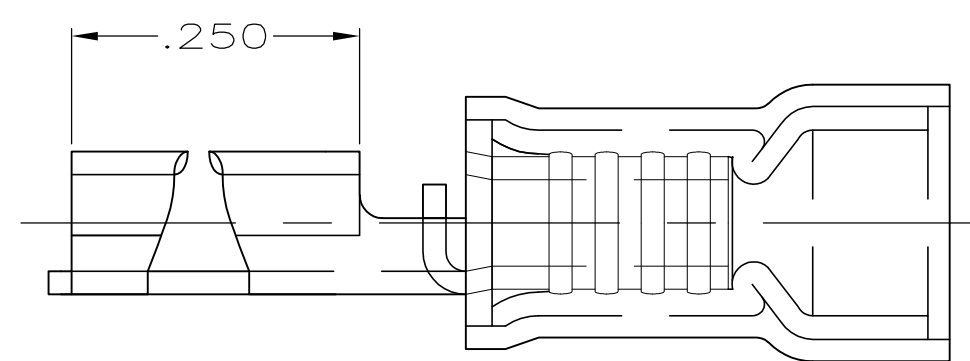

QTY	PACKAGE TYPE	PART NO
100	LOOSE PC,BOX	8-640929-1
-	TAPE MOUNTED	640929-2
-	LOOSE PIECE	640929-1

AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 PRODUCT INFORMATION CENTER
 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION
 TOOLING ASSISTANCE CENTER
 1-800-722-1111

FOR ORDER ENTRY
 1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
-

VOLTAGE RATING:
-

CIRCULAR MIL AREA:
-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± .015
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -

MATERIAL
 BODY, BRASS .016
 SLV, NYLON, COLOR, BLUE

FINISH
 BODY, PRE-TIN

DWN L OLMEDA 13NOV95
 CHK M ELLIS 15NOV95
 APVD B BARE 15NOV95

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

STE TE Connectivity

RECEPTACLE, 110 SERIES,
 FASTON™, PIDG™,
 WIRE SIZE, 16-14 AWG

SIZE A3 CAGE CODE 00779 DRAWING NO C-640929 RESTRICTED TO -

SCALE NTS SHEET 1 OF 1 REV G1