
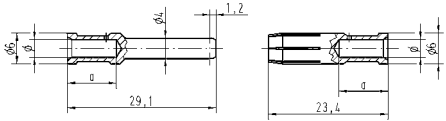


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® C, Crimp contact, Contact surface: Silver plated 	1.5	09 32 000 6104	09 32 000 6204	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85 mm</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5 mm</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3 mm</td> <td>12 mm</td> </tr> </tbody> </table>	Conductor cross-section	∅	Stripping length	1.5 mm ² AWG 16	1.75 mm	9.5 mm	2.5 mm ² AWG 14	2.25 mm	9.5 mm	4 mm ² AWG 12	2.85 mm	9.5 mm	6 mm ² AWG 10	3.5 mm	9.5 mm	10 mm ² AWG 8	4.3 mm	12 mm
	Conductor cross-section	∅	Stripping length																			
	1.5 mm ² AWG 16	1.75 mm	9.5 mm																			
	2.5 mm ² AWG 14	2.25 mm	9.5 mm																			
	4 mm ² AWG 12	2.85 mm	9.5 mm																			
6 mm ² AWG 10	3.5 mm	9.5 mm																				
10 mm ² AWG 8	4.3 mm	12 mm																				
2.5	09 32 000 6105	09 32 000 6205																				
4	09 32 000 6107	09 32 000 6207																				
6	09 32 000 6108	09 32 000 6208																				
10	09 32 000 6109	09 32 000 6209																				

Modular