
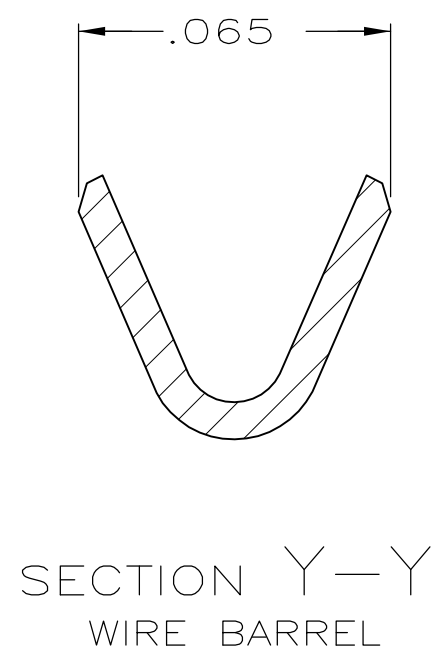
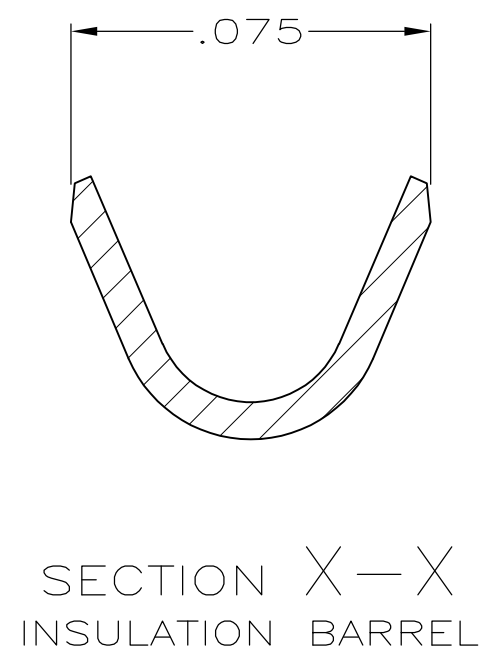
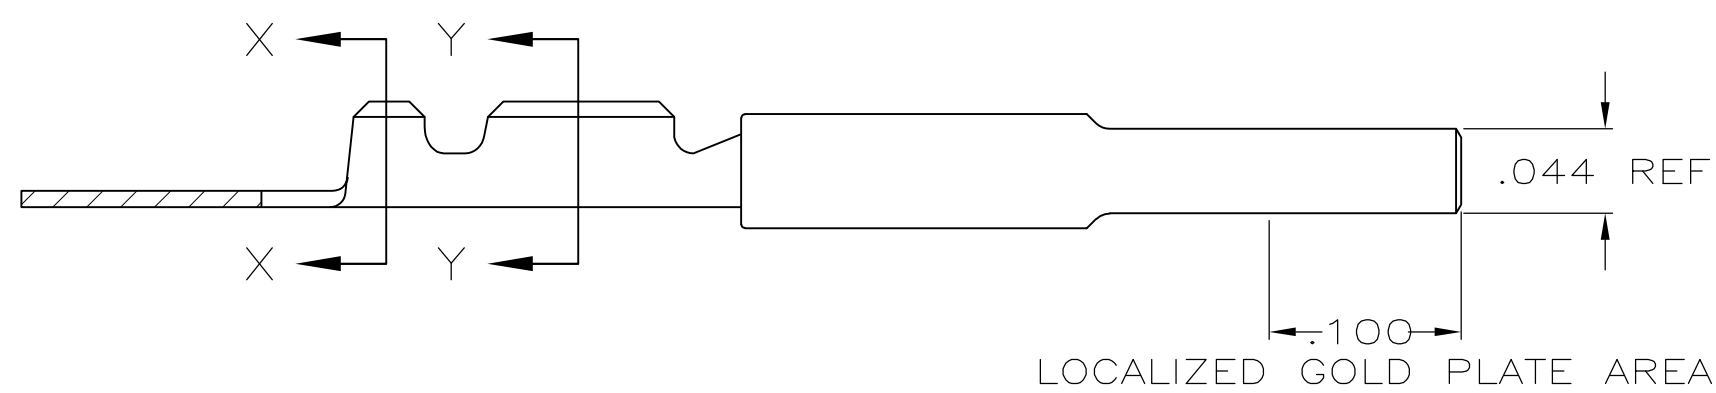


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

Loc		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
GP	00	H1	REVISED PER ECO-11-004835		11MAR11	RK	HMR

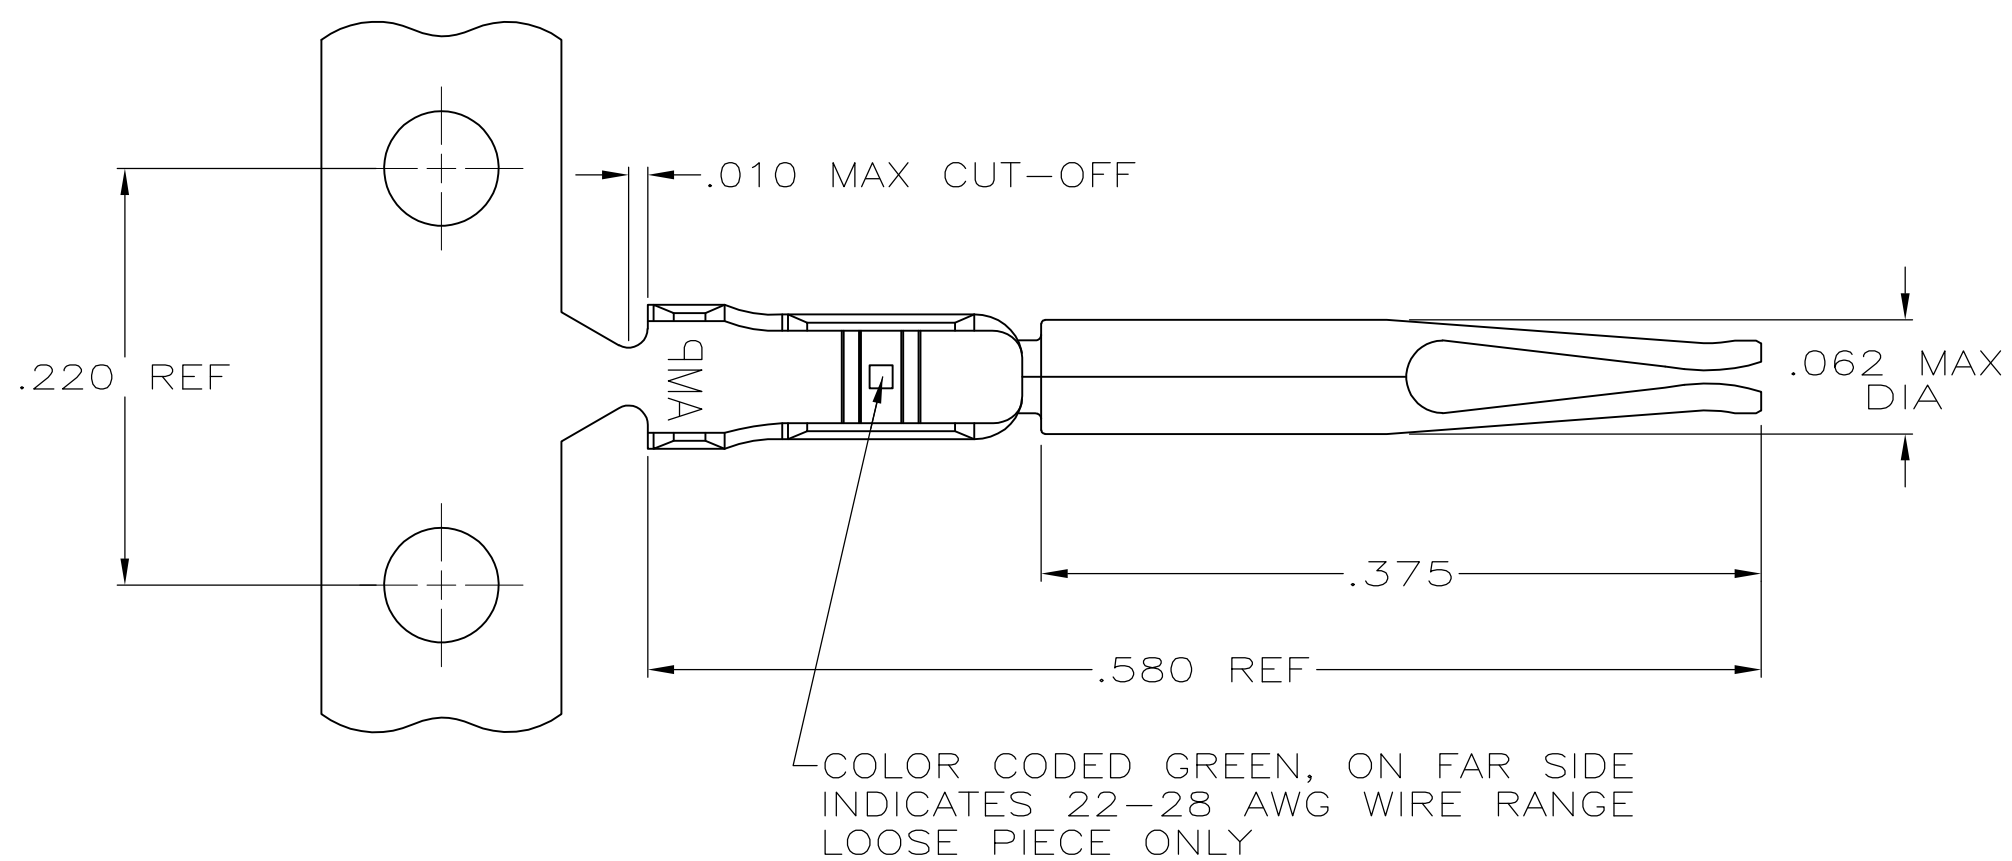

- ① FOR MINI APPLICATOR.
- ② FOR HAND TOOL USE ONLY.
- 3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
- ④ GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727.
- ⑤ PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000050 NICKEL.
- ⑥ PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000030 NICKEL.
- ⑦ PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, .000050 GOLD ON REMAINDER, ALL OVER .000050 NICKEL UNDERPLATE.
- ⑧ GOLD PLATING ON THE CARRIER STRIP IS NOT REQUIRED.
- ⑨ OBSOLETE.

SMALL PACK	⑥	⑨	748610-7	⑨	1-748610-1
-	⑦	⑧	748610-9	⑨	748610-8
STANDARD	⑥	⑨	748610-7	⑨	748610-5
-	⑤	⑨	748610-4	⑨	748610-2
PACKAGING	FINISH ④	LOOSE PIECE ②	PART NUMBER ①		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	1-12-88	TE Connectivity	
DIMENSIONS: INCHES		CHK	1-14-88		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	1-19-88		
0 PLC ± -		NAME	V.KUMAR		
1 PLC ± -		PRODUCT SPEC	SOCKET CONTACT, SIZE 22 DF, 22-28 AWG, W/.030-.040 DIA INSULATION SUPPORT		
2 PLC ± -		APPLICATION SPEC	-	SIZE	A2
3 PLC ± .005		WEIGHT	-	CAGE CODE	00779
4 PLC ± -		FINISH	SEE TABLE	DRAWING NO	C-748610
ANGLES ± 0° 30'		CUSTOMER DRAWING	SCALE 10:1	SHEET	1 of 1
MATERIAL PHOS BRONZE PER QQ-B-750		RESTRICTED TO	-	REV	H1