
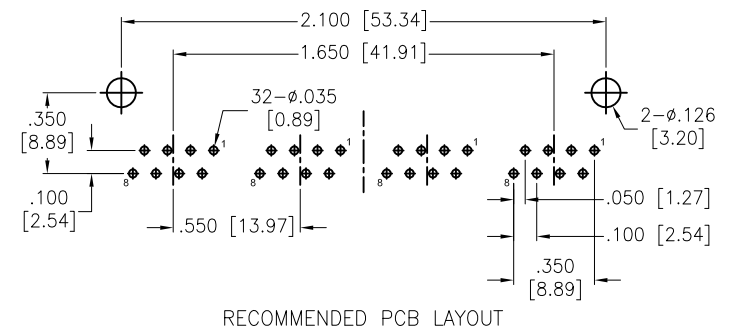
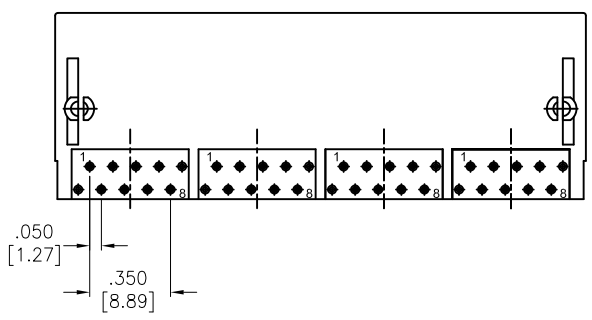
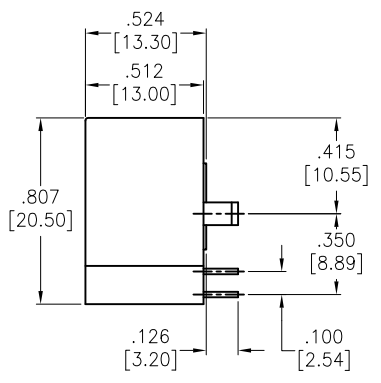
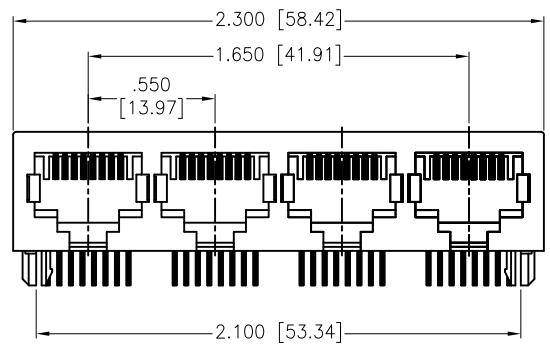


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/27/18	

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



**SPECIFICATIONS:**

Material:  
Insulator: Hi-temp thermoplastic, rated UL 94V-0  
Insulator color: Pantone P114C, Yellow  
Contacts: Phosphor Bronze  
Contacts Plating:  
Round contact  
Gold over Nickel underplate overall  
Flat contact  
Gold over Nickel underplate on contact area,  
Tin over Nickel underplate on solder tails  
Electrical:  
Voltage rating: 150 VAC max  
Current rating: 1.5 Amp max  
Contact Resistance: 30 mohms max  
Insulation resistance: 500 Mohms min  
Dielectric withstanding voltage: 1,000 VAC  
Temperature Rating:  
Operating temperature: -40°C to +70°C  
Environmental:  
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	HR	9/27/18
CHECKED	RC2	9/27/18
APPROVED		

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, GANGED 8P8C,  
R/A, PCB, YELLOW COLOR

SIZE	PART NO.	REV.
X	MTJG-4-88TX1-P114C-HT-A	-

REF: S00297T SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1

6 5 4 3 2 1

D

D

C

C

B

B

A

A