
Ŧ	្រា	н т	m	0





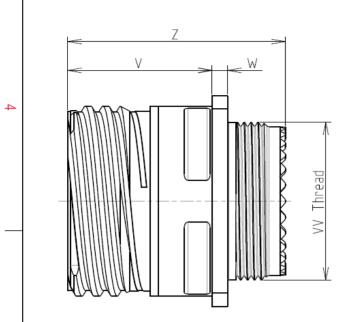

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL TYPE : Square Flange Receptacle

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum : 500 Mating cycles -Durability -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C

: 2000 hours


: 10.2 g ± 10%

8D 0

G

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Е

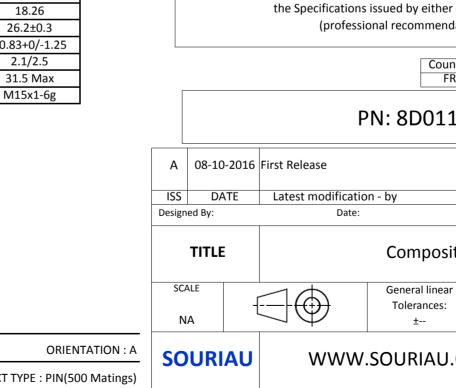

FORMAT

A3

D

SHELL SIZE : 11		CONTACT TYPE : PIN(500 Matings)
PLATING : X = Without Plating	_	CONTACT LAYOUT : 11-04

11

Х

04

А

F

А

0		Φ		A			
					4		
LAY	YOUT SHOWN AS EXA	MPLE			3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D011X04AA							
st Release Latest modificatio	on - by			MOD N°			
Date:	,		CUSTOMER DRAWIN				
Composite Receptacle 8D series							
$] \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859		1		
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	SOURIAU [SHEET			
С	8D011X04	4AA-C B		1/2 A			
Ŭ	'	5					

-	т	۵	г П	m	D	0	
		Contact Layout				Ρ	anel Cutou
4	-x_	$ \begin{array}{ccc} \bullet & \bullet \\ \bullet & $			ň	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	size ^{no.} con	Uon (mm) X-axis (mm) Y-axis (mm) • +.065 (1.65) +.065 (1.65) • +.065 (1.65) 065 (1.65) • 065 (1.65) 065 (1.65)			2		<u>ØТ.</u>
ى						Dim ØA ØAA R1 ØT	
	-					SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts whi by either of
N							Country FR
					A 08-10-20 ISS DATE Designed By:	016 First Release	D011X
					TITLE	Gene	mposite eral linear erances:
→					NA SOURIA		±
				_	FORMAT A3		JRIAU 011X0
L	Н	G	F	E	D	С	

