



| | | | |
|-----------|----------------------|---------------------|-----------------|
| 版次 REV | 变更内容 MODIFICATION | 变更日期 UPDATE DATE | 签名 SIGNATURE |
| | | | |
| | | | |
| | | | |


受控文件

Type B

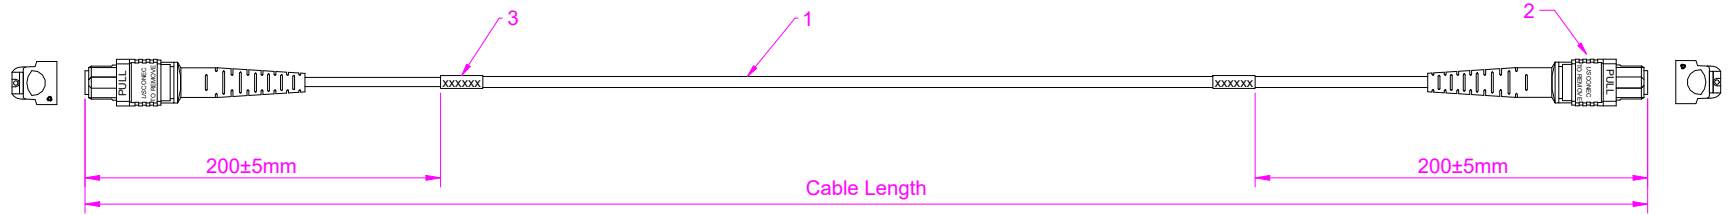

- NOTES:
1. Insertion loss ≤ 0.7 dB
 2. Return loss ≥ 60 dB
 3. 当光缆总长米数小于0.5M时，主缆只需在中间加一个线标

| Cable Length | Tolerance |
|-------------------------------|-------------------|
| Cable Length < 1M | 5cm |
| 1M \leq Cable Length < 15M | 10cm |
| 15M \leq Cable Length < 30M | 15cm |
| Cable Length ≥ 30 M | Cable Length * 1% |

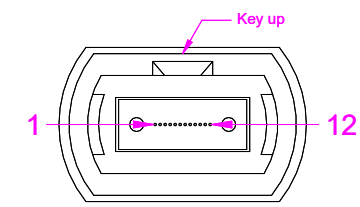

Blue1 Orange2 Green3 Brown4 Grey5 White6 Red7 Black8 Yellow9 Violet10 Pink11 Aqua12

Aqua1 Pink2 Violet3 Yellow4 Black5 Red6 White7 Grey8 Brown9 Green10 Orange11 Blue12

| | | | |
|---|-----|--|---------------------------------------|
| 3 | 2 | Cable label | 线标(25*30mm) |
| 2 | 2 | MTP/APC Female SM 12 Fibers 3.0mm Connector (Green Housing Black Boot) | MTP/APC 单模 母头 3.0mm 12芯接头 (绿色外壳 黑色尾套) |
| 1 | A/R | OD:3.0mm, Singlemode 9/125 G657A1, 12Fibers Micro Cable, OFNP, Color: Yellow | Ø3.0mm, 单模 G657A1, 12芯黄色迷你缆, OFNP |

| | | | | |
|------|-----|-----|----------------|----|
| ITEM | QTY | P/N | SPECIFICATIONS | 规格 |
|------|-----|-----|----------------|----|

| | | | | | | | | | |
|--|-------------|---------------|----------------|-------------|---|--|--|--|--|
| | 制图 DRAW | YUFENG XIE | 日期 DATE | 25-07-2022 | TITLE: Fiber Optic Patch Cord MTP/APC-MTP/APC 12Fibers Singlemode | | | | |
| | 审核 CHECK | WEN ZHOU LIAO | 批准 APPROVED | Zhenlong Yu | | | | | |