

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Contact carrier, Power, 4-position, Socket, straight, M12, coding: T, PCB mounting, SMD



## Your advantages

- For compact devices: transmit high power in a confined space
- Reduced mounting costs thanks to two-piece device connector
- Packaging available for automated pick and place assembly
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1412019       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 100 pc        |
| Sales key                            | AB27          |
| Product key                          | ABQBGJ        |
| GTIN                                 | 4046356992930 |
| Weight per piece (including packing) | 6.34 g        |
| Weight per piece (excluding packing) | 6.34 g        |
| Customs tariff number                | 85366990      |
| Country of origin                    | DE            |

1412019

<https://www.phoenixcontact.com/us/products/1412019>

## Technical data

### Notes

|         |  |
|---------|--|
| General | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
|---------|--|

### Product properties

|                     |                |
|---------------------|----------------|
| Product type        | Contact insert |
| Sensor type         | Power          |
| Number of positions | 4              |
| Application         | Power          |
| Seal present        | no             |
| Shielded            | yes            |
| Coding              | T              |
| Thread type         | M12            |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Rated surge voltage   | 1.5 kV                     |
| Contact resistance    | $\leq 3 \text{ m}\Omega$   |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 63 V                       |
| Nominal current $I_N$ | 12 A                       |

### Interfaces

|                      |       |
|----------------------|-------|
| Signal type/category | Power |
|----------------------|-------|

### Material specifications

|  |      |
|--|------|
| Flammability rating according to UL 94 | V0   |
| Contact material                       | CuZn |
| Contact surface material               | Au   |
| Contact carrier material               | PA   |

### Connector

#### Connection 1

|                   |          |
|-------------------|----------|
| Head design       | Socket   |
| Head cable outlet | straight |
| Head thread type  | M12      |

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

|        |   |
|--------|---|
| Coding | T |
|--------|---|

## Cable/line

|                      |       |
|----------------------|-------|
| Signal type/category | Power |
|----------------------|-------|

## Mechanical properties

### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

## Environmental and real-life conditions

### Ambient conditions

|  |   |
|--|---|
| Degree of protection (when plugged in) | IP67 (correctly plugged in and locked)  |
| Degree of protection                   | IP67 (correctly plugged in and locked)<br>IP67, when plugged in                       |
| Ambient temperature (operation)        | -25 °C ... 105 °C (Plug / socket)<br>-55 °C ... 105 °C (without mechanical actuation) |

## Standards and regulations

### M12

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-111 |
| Note                     | In line with    |

## Mounting

|                   |              |
|-------------------|--------------|
| Mounting type     | PCB mounting |
| Connection method | SMD          |

## Packaging specifications

|                   |      |
|-------------------|------|
| Type of packaging | Belt |
|-------------------|------|

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier




1412019

<https://www.phoenixcontact.com/us/products/1412019>

## Drawings

Dimensional drawing

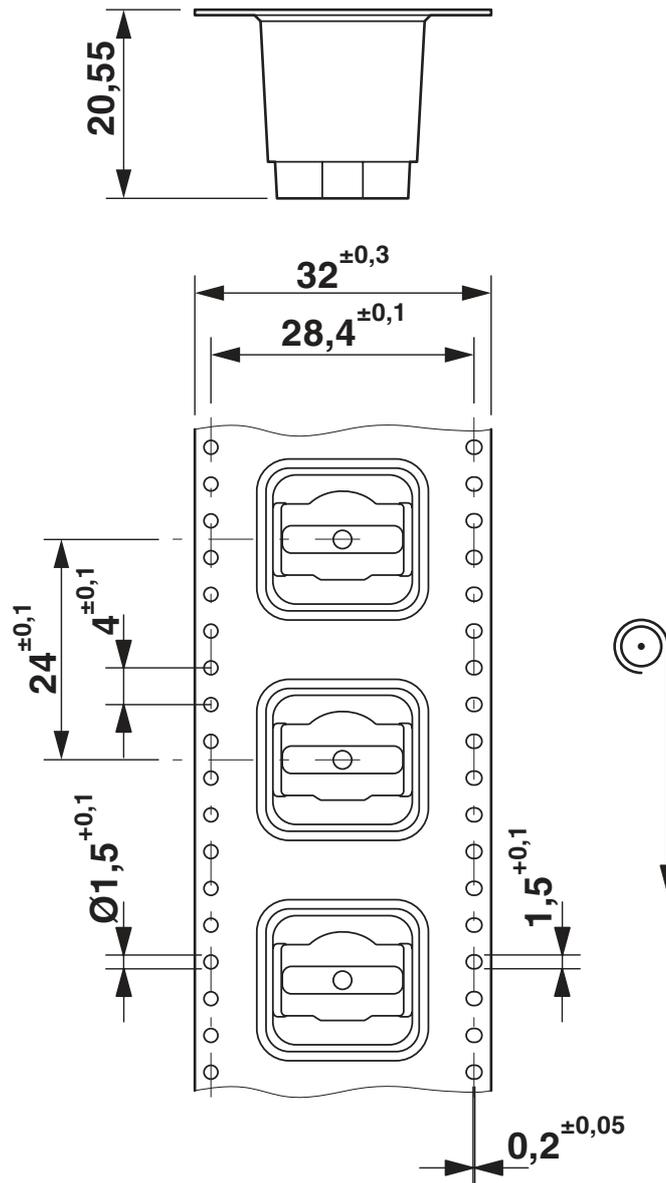


SMD tape-on-reel packing

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier

1412019

<https://www.phoenixcontact.com/us/products/1412019>

Schematic diagram

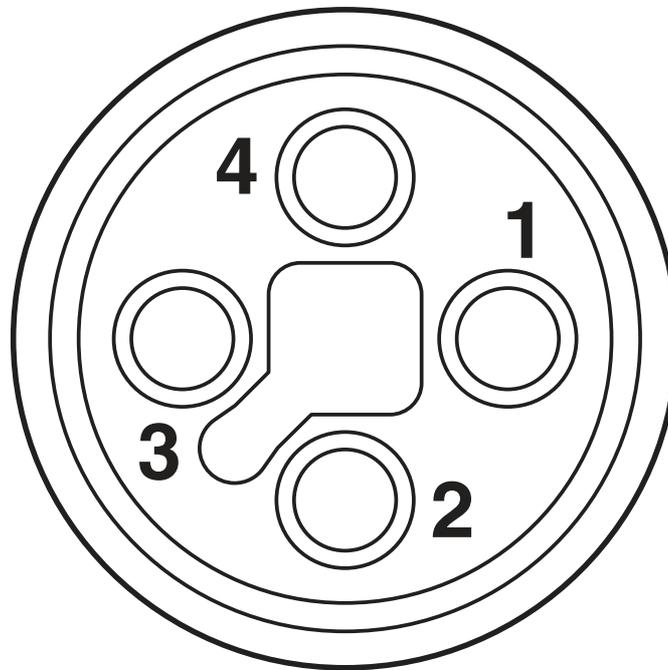

Pin assignment of M12 socket, 4-pos., T-coded, socket side view


# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019


<https://www.phoenixcontact.com/us/products/1412019>

Drilling plan/solder pad geometry

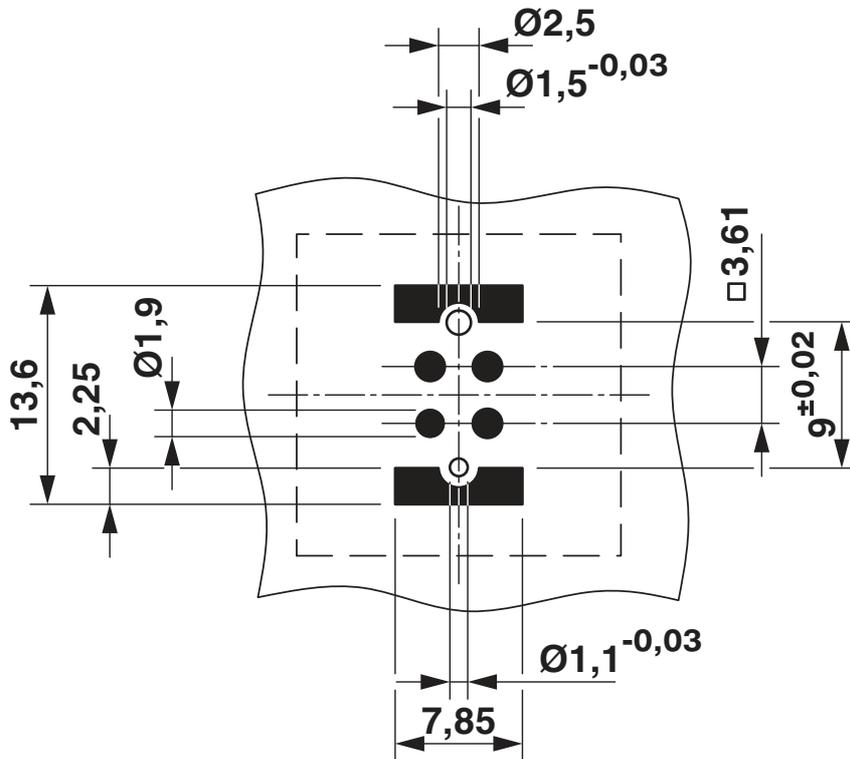

Soldering pad geometry

Dimensional drawing

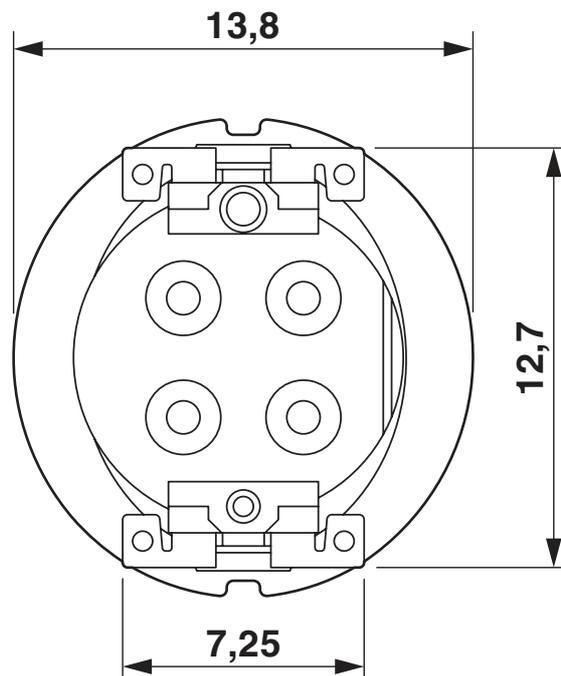

View of solder side


# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

Dimensional drawing

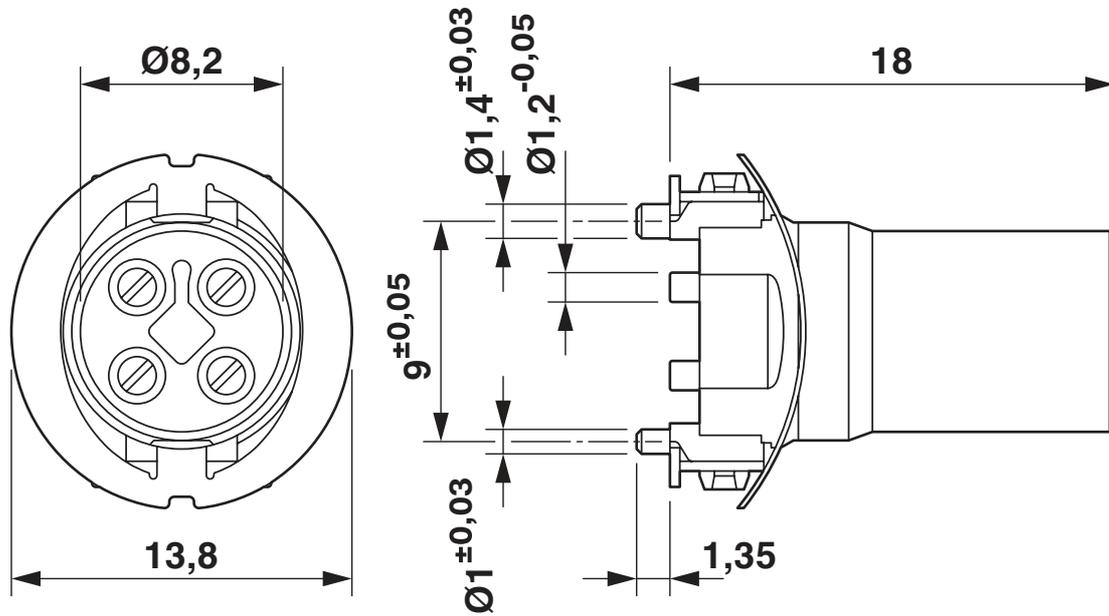

Dimensional drawing

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412019>

|  <b>cUL Recognized</b><br>Approval ID: E468743-20190917 |                       |                       |                   |                      |
|--|-----------------------|-----------------------|-------------------|----------------------|
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|  | 63 V                  | 8 A                   | -                 | -                    |

|  <b>UL Recognized</b><br>Approval ID: E468743-20190917 |                       |                       |                   |                      |
|---|-----------------------|-----------------------|-------------------|----------------------|
|   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|   | 63 V                  | 10 A                  | -                 | -                    |

|  <b>EAC</b><br>Approval ID: B.01687 |  |
|---|--|
|---|--|

| <b>cULus Recognized</b> |  |
|-------------------------|--|
|-------------------------|--|

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002635 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## Environmental product compliance

|            |  |
|------------|--|
| REACH SVHC | Lead 7439-92-1   |
| China RoHS | Environmentally Friendly Use Period = 50 years   |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## Accessories

### SACC-BP-F-M12/M15-6-SMD - Housing screw connection

1414021

<https://www.phoenixcontact.com/us/products/1414021>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239058

---

### SACC-BP-F-M12/M15-6-SMD SCO - Housing screw connection

1414023

<https://www.phoenixcontact.com/us/products/1414023>



Housing screw connection, Socket, M12-SPEEDCON, Rear mounting, M15 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239059

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## SACC-FP-F-M12/M14 SMD - Housing screw connection

1412079

<https://www.phoenixcontact.com/us/products/1412079>



M12 female connector, front mounting SMD with M14 screw fastening

---

## SACC-FP-F-M12/PRESS SMD - Housing screw connection

1412081

<https://www.phoenixcontact.com/us/products/1412081>



Housing screw connection, Socket, M12, Front mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1238973

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## SACC-BP-F-M12/SMD-0,9/1,6-9TIP - Housing screw connection

1419569

<https://www.phoenixcontact.com/us/products/1419569>



Housing screw connection, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239268

---

## SACC-BP-F-M12/SMD-1,6/2,3-9TIP - Housing screw connection

1419570

<https://www.phoenixcontact.com/us/products/1419570>



Housing screw connection, M12, Rear mounting

## SACC-CI-M12FST-4P SMD SH R32 - Contact carrier

1412019

<https://www.phoenixcontact.com/us/products/1412019>



## SACC-BP-F-M12/SMD-2,3/3,0-9TIP - Housing screw connection

1419571

<https://www.phoenixcontact.com/us/products/1419571>



Housing screw connection, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239270

---

## SACC-BP-F-FIX/NUT-BK-SMD - Fixing sleeve

1419568

<https://www.phoenixcontact.com/us/products/1419568>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier

1412019

<https://www.phoenixcontact.com/us/products/1412019>

## SACC-BP-F-FIX/NUT-CY-SMD - Fixing sleeve

1419565

<https://www.phoenixcontact.com/us/products/1419565>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

---

## SACC-BP-F-FIX/NUT-GN-SMD - Fixing sleeve

1419566

<https://www.phoenixcontact.com/us/products/1419566>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

# SACC-CI-M12FST-4P SMD SH R32 - Contact carrier



1412019

<https://www.phoenixcontact.com/us/products/1412019>

## SACC-BP-F-FIX/NUT-VT-SMD - Fixing sleeve

1419567

<https://www.phoenixcontact.com/us/products/1419567>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)