


Mechanical Specifications (mm)

	D:	8.5	± Max
	T:	4.0	± .5
	Lead Diameter	0.5	± .1
	S:	5.1	± 1.0
	L:	38.0	± 9
	Coating Lead Run Down (straight Leads)	5.0	± Max
	B:	4.00	± 3.5
	C:	1.50	± .2

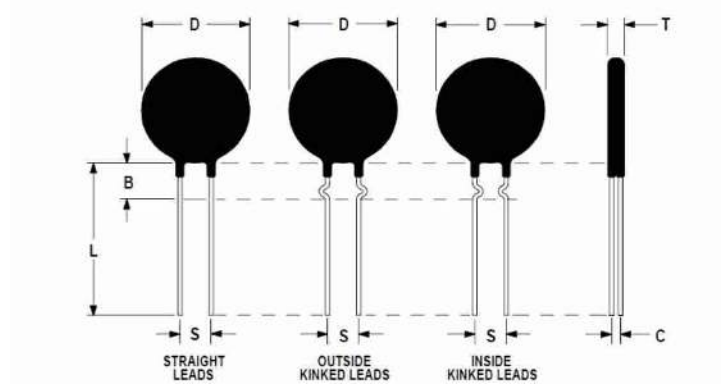

Electrical Specifications

	Resistance:	220.0 Ω	± 25 %
	Max Steady State Current upto 65°C:	1.00	A
	Max Rec. Energy Rating:	7	J
	Resistance @ 100% Max Current:	1.90	Ω
	Resistance @ 50% Max Current:	4.14	Ω
	Body Temperature at 100% Max Current:	152.00	°c
	Dissipation Constant:	9.0	mw/°c
	Thermal Time Constant:	20	Sec.
	Material Type (for Beta and Curve):	M	

SL08 22101	
Date: 06/01/2023	Drawn by: Erin Lannen
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Erin Lannen
	Revision: