



- NOTES:
1. MATERIAL: UNFILLED NYLON, UL94V-0, COLOR: BLACK
 2. FINISH: N/A
 3. PRODUCT SPECIFICATION: PS-44300-001
 4. PACKAGING SPECIFICATION: BULK PACKED PER 466230000-PK
 5. THIS RECEPTACLE MATES WITH MOLEX 46625 BMI PLUG HOUSING, 46622 BMI RIGHT ANGLE PCB HEADER.
 6. THIS RECEPTACLE TO BE USED WITH MOLEX FEMALE CRIMP TERMINALS ONLY. (SERIES 43030, 45773, OR 46235). SEE APPLICATION SPECIFICATION AS-44133-001 FOR TERMINAL ORIENTATION IN HOUSING.
 7. THIS RECEPTACLE IS DESIGNED FOR USE WITH 1.57/.062 MAX. TO 1.27/.050 MINIMUM THICK PANELS.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN THE TOTAL TOLERANCE.
 9. MOLEX RECOMMENDS THE USE OF MICRO-FIT TEST PLUG (SERIES 44242) WHENEVER CONTINUITY TESTING IS PERFORMED. TEST PLUGS MUST NOT BE USED TO MAKE OR BREAK UNDER LOAD. MOLEX DOES NOT RECOMMEND USING STANDARD MATING COMPONENTS (SERIES 46622, 46625) FOR HARNESS TESTING PURPOSES.
 10. PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002. SOME HOUSINGS MAY HAVE A SMALL GATE BLEMISH NEAR THE GATE LOCATION THAT DOES NOT AFFECT FUNCTIONALITY. HOUSINGS MAY EXHIBIT A SURFACE IMPERFECTION KNOWN AS "SINK MARKS" UP TO 0.60/(.024) MAX. THIS IS A COSMETIC DEFECT AND DOES NOT AFFECT FUNCTION OF THE CONNECTOR.
 11. TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.

CKT. No.	MATERIAL NUMBER	DIM. "A"	DIM. "B"	DIM. "G"	DIM. "H"
02	46623-0201	24.7 .97	3.00 .118	13.46 .530	22.10 .870
03	46623-0301	27.7 1.09	6.00 .236	16.46 .648	25.10 .988
04	46623-0401	30.7 1.21	9.00 .354	19.46 .766	28.10 1.106
05	46623-0501	33.7 1.33	12.00 .472	22.46 .884	31.10 1.224
06	46623-0601	36.7 1.44	15.00 .591	25.46 1.002	34.10 1.343
07	46623-0701	39.7 1.56	18.00 .709	28.46 1.120	37.10 1.461
08	46623-0801	42.7 1.68	21.00 .827	31.46 1.239	40.10 1.579
09	46623-0901	45.7 1.80	24.00 .945	34.46 1.357	43.10 1.697
10	46623-1001	48.7 1.92	27.00 1.063	37.46 1.475	46.10 1.815
11	46623-1101	51.7 2.04	30.00 1.181	40.46 1.593	49.10 1.933
12	46623-1201	54.7 2.15	33.00 1.299	43.46 1.711	52.10 2.051

QUALITY SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION EC NO: 118630 DRWN: MKIPPER CHKD: SSOUSEK REV / APPR: FSMITH	GENERAL TOLERANCES (UNLESS SPECIFIED) MM/IN		DIMENSION UNITS SCALE 4:1		
		4 PLACES ± ± 3 PLACES ± ± 0.01 2 PLACES ± 0.25 ± 0.014 1 PLACES ± 0.35 ± ± 0 PLACES ± ±		DRWN BY DATE MSTROH 2012/05/30		MICRO-FIT(3.0) BMI SINGLE ROW RECEPTACLE FLOATING PANEL MOUNT, 2-12 CIRCUIT
		ANGULAR TOL = 0.5 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHK'D BY DATE SSOUSEK 2012/08/30		
PRODUCT CUSTOMER DRAWING SERIES MATERIAL NUMBER CUSTOMER 46623 SEE CHART GENERAL MARKET		APPR BY DATE FSMITH 2012/10/29	DOCUMENT NUMBER DOC TYPE DOC PART SHEET NUMBER SD-46623-001 PSD 001 1 OF 2			
RELEASE STATUS P1 RELEASE DATE 28.07.2017 16:42:00 MODEL: TM-46623-0000		DIMENSION UNITS C		THIRD ANGLE PROJECTION		

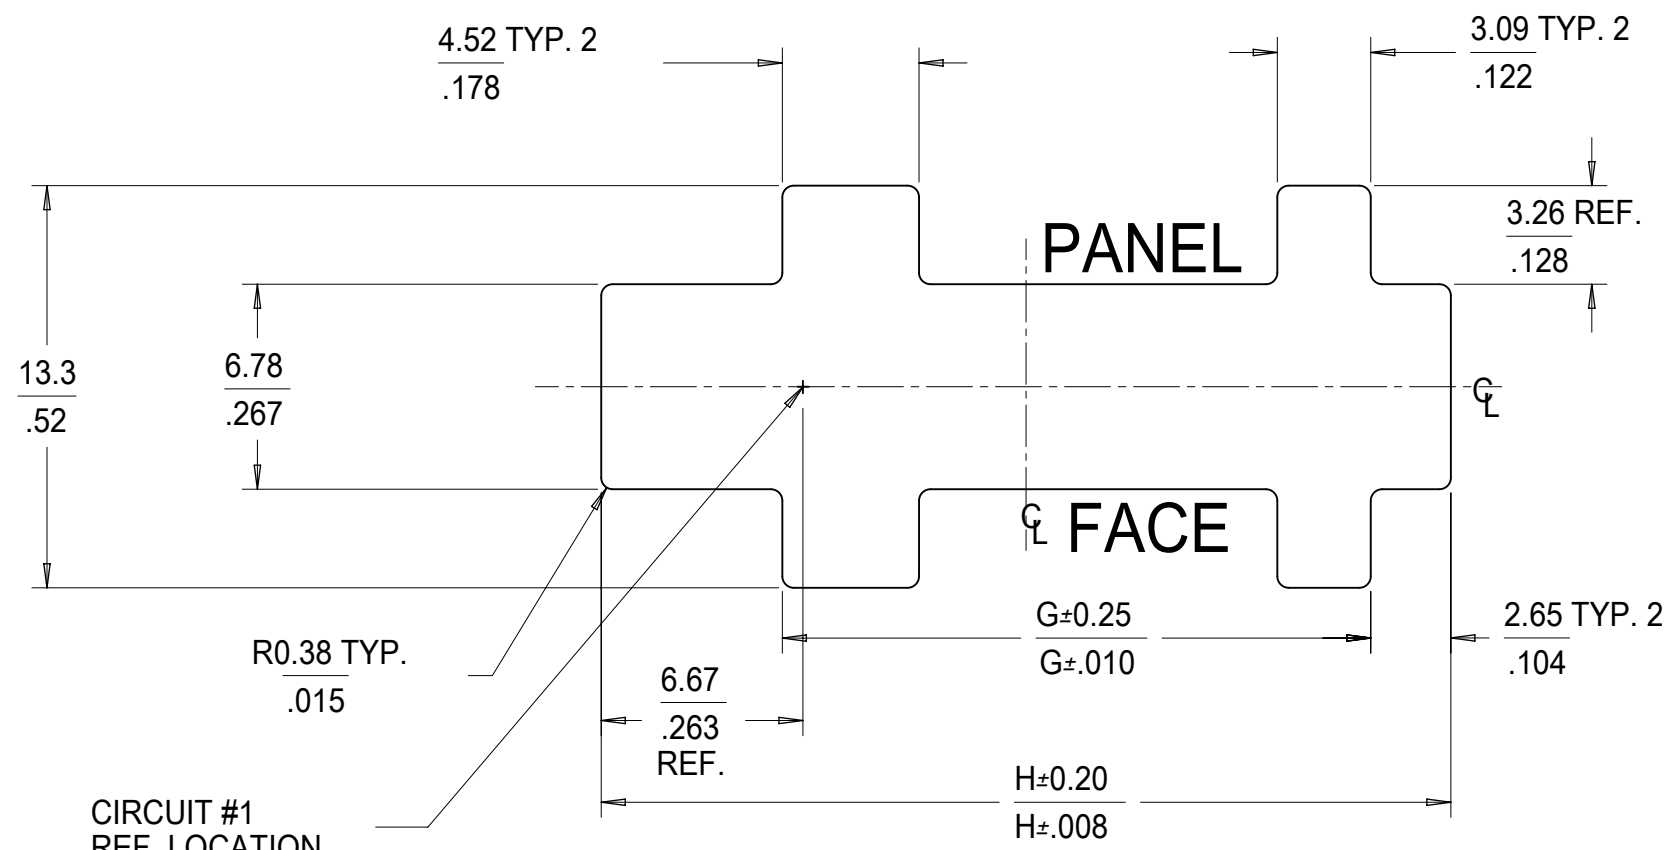

RECOMMENDED PANEL CUT-OUT
(SEE NOTE #7)

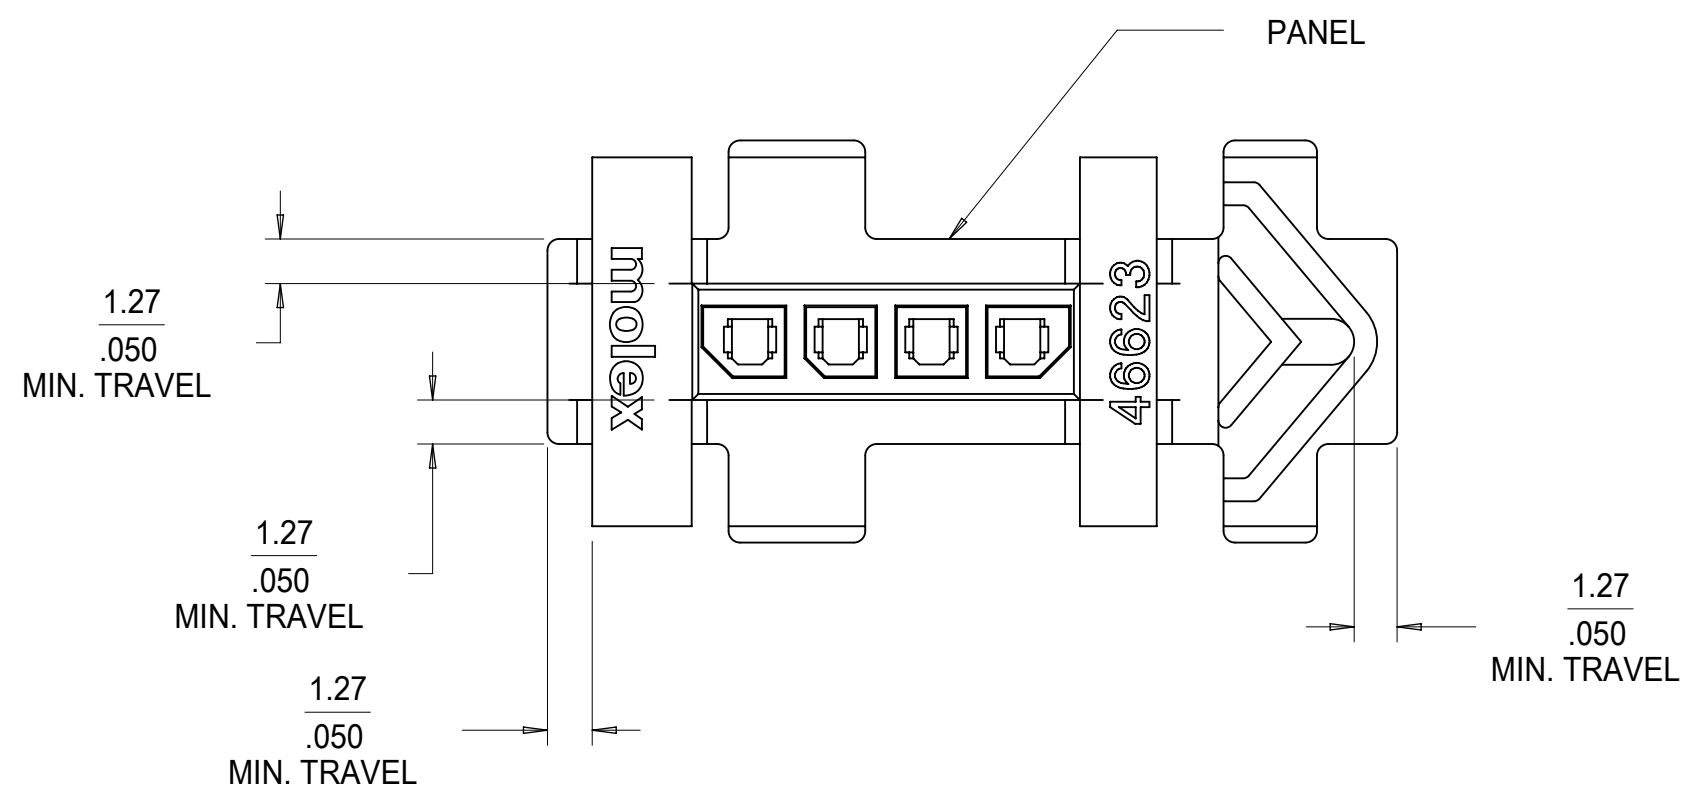

RECEPTACLE SHOWN MOUNTED IN PANEL

QUALITY SYMBOLS 	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	RELEASED EC NO: 118630 DRWN: MKIPPER CHKD: SSOUSEK REV / APPR: FSMITH	2017/06/27		2017/07/19		2017/07/28		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS: MM/IN SCALE: 4:1	
		4 PLACES ±		±		±		DRWN BY: MSTROH		DATE: 2012/05/30	
		3 PLACES ±		±		± 0.01		CHK'D BY: SSOUSEK		DATE: 2012/08/30	
		2 PLACES ±		0.25		± 0.014		APPR BY: FSMITH		DATE: 2012/10/29	
		1 PLACES ±		0.35		±		DRAWING SIZE: C		THIRD ANGLE PROJECTION	
	0 PLACES ±		±		±		ANGULAR TOL = 0.5		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		
	A		REV		APPR		C		SD-46623-001		
	P1		RELEASE DATE		28.07.2017		16:42:00		PSD		
	12		11		10		9		8		
7		6		5		4		3			
2		1		2 OF 2		001		GENERAL MARKET			