


**Mechanical Properties:**

Connectors: Right Angle MMCX Plug  
 Johnson p/n 135-3403-101  
 Reverse Polarity SMA Jack  
 Johnson p/n 142-4303-401  
 Cable: Coax, RG-316/U  
 Operation Temp: -20°C to +65°C  
 Storage Temp: -30°C to +75°C

**Electrical Properties:**

Freq Range: 2.4~2.5 GHz  
 Impedance: 50 ohm nominal  
 VSWR: <2.0:1

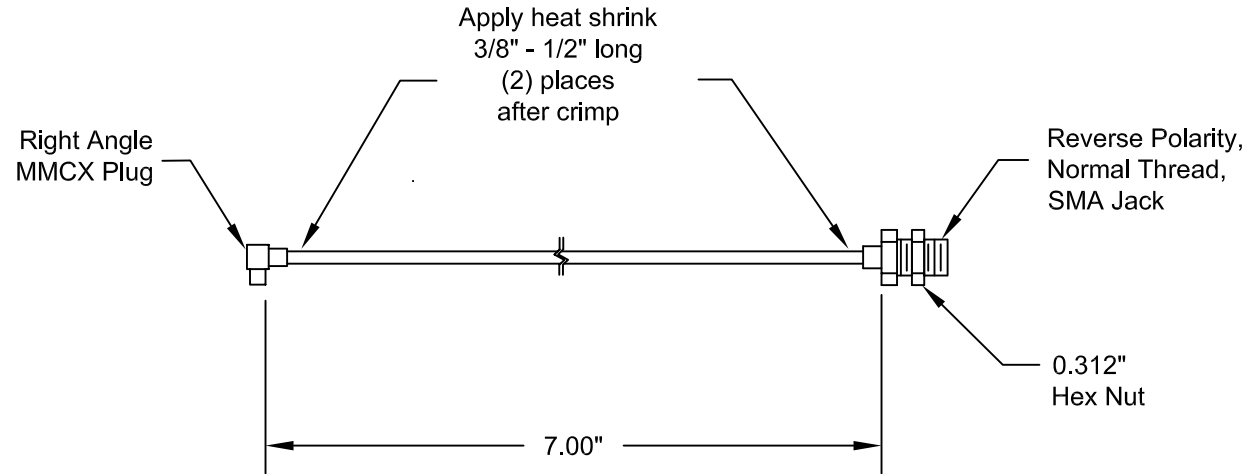

DEVICE USED ON	REQ D	MATERIAL	SIZE	SCALE	UNLESS OTHERWISE SPECIFIED. TOLERANCES: .XX ±0.01 .XXX ±0.005 ANGLES +1°	Phone: 800-492-2320 Fax: 913-492-1243 e-mail: www.aerocomm.com
		FINISH	A	1=1		
DRAWN BY	THE	DATE	REV	SHEET		
		12-20-2005	0	1/1		
CHECKED BY		DATE	DWG. NO.		TITLE	
APPROVED BY		DATE	1300-00023		Cable Assembly Coax, MMCX Right Angle Plug to Reverse Polarity SMA Jack	