
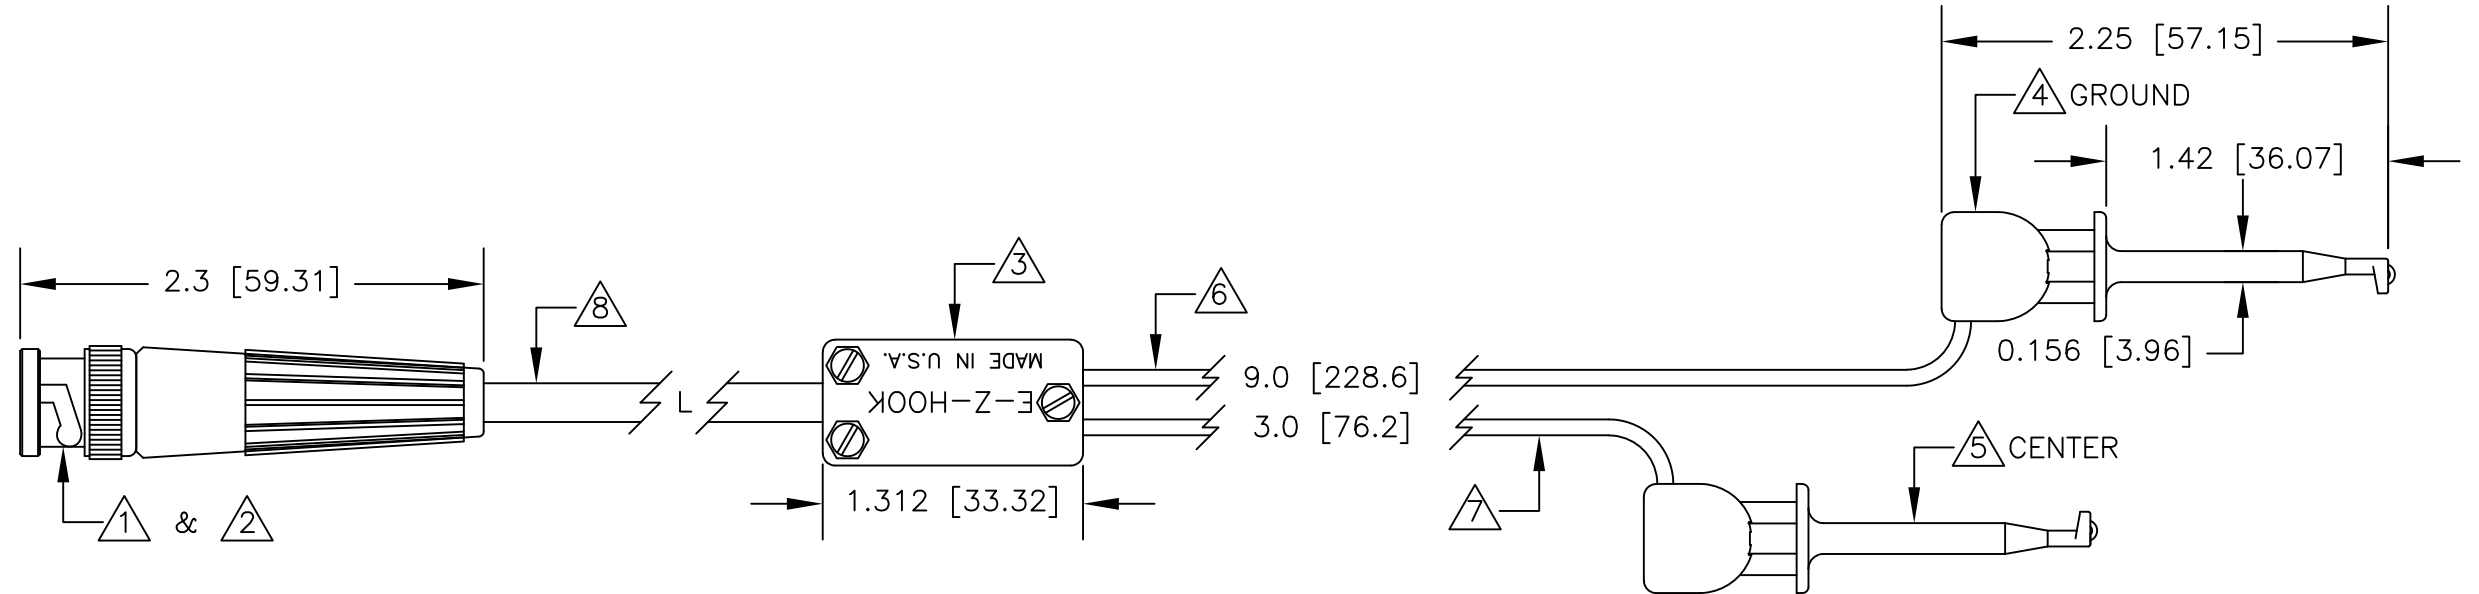


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED BRASS.
DIELECTRIC: PTFE
SPRING: NICKEL PLATED SK5
GASKET: RED RUBBER
2. P/N: SR58BLK
BOOT: BLK MOLDED PVC
3. P/N: Y-1000
HOUSING: BLK MOLDED NYLON
HARDWARE: SS SCREW, NUTS & WASHER
4. P/N: XRBLK
HOUSING: BLK MOLDED NYLON.
CONTACT: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
5. P/N: XRRED
HOUSING: RED MOLDED NYLON.
CONTACT: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
6. P/N: W-500/0
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION
7. P/N: W-500/2
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION
8. P/N: C-1000/0
20AWG RG58C/U CABLE
0.195 [4.95] O.D. PVC INSULATION

| LTR | REVISIONS | | DATE | APPROVED |
|-----|-------------|--|------|----------|
| | DESCRIPTION | | | |
| | | | | |

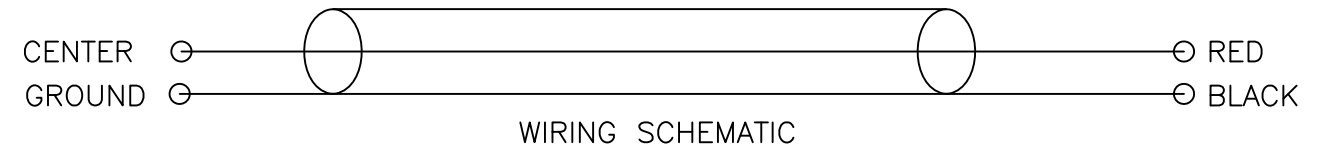

| | | | | | |
|-------------|---------|---|--------------|------|--|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A | CONTRACT NO. | | E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. |
| | | | APPROVALS | DATE | |
| | | MATERIAL SEE NOTE | DRAWN R.L. | 8/18 | DESCRIPTION BNC MALE TO XR MINI HOOK LEADS, RG58 CABLE |
| | | FINISH SEE NOTE | APPROVED BY | | |
| NEXT ASSY | USED ON | | | | SIZE B CODE IDENT NO. 08505 DRAWING NO. 1020XR REV. |
| APPLICATION | | DO NOT SCALE DRAWING | | | SCALE 1:1 SHEET 1 OF 1 |