

ITEM	PART#	DESCRIPTION	QTY	UOM
A	874390200	1.5mm Rcpt Hsg Nyl Nat 2Ckt	1	PC
B	874210000	1.5mm Rcpt Term Crim 2.5Sn	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X24AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X24AWG DISC SR-PVC BK UL10002	BLACK

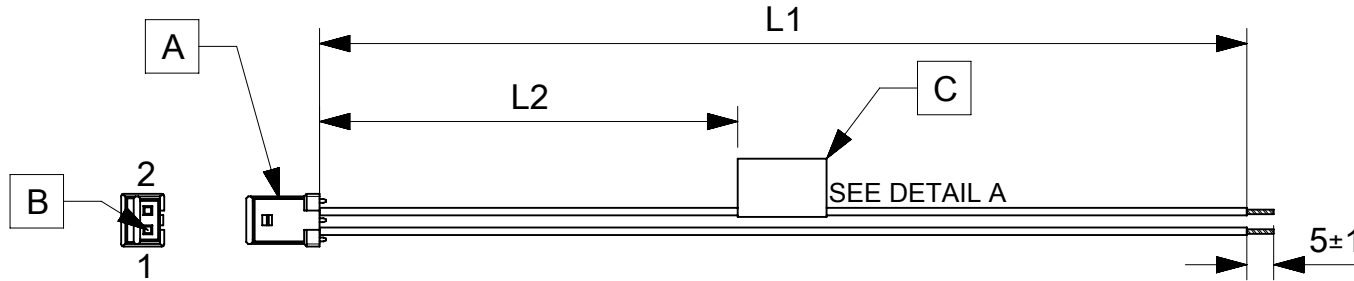


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2183971020	50±3	13	PICO-SPOX 1.5 R-S 2CKT 50MM DISC Sn
2183971021	100±5	38	PICO-SPOX 1.5 R-S 2CKT 100MM DISC Sn
2183971022	150±8	63	PICO-SPOX 1.5 R-S 2CKT 150MM DISC Sn
2183971023	300±10	138	PICO-SPOX 1.5 R-S 2CKT 300MM DISC Sn
2183971024	600±10	288	PICO-SPOX 1.5 R-S 2CKT 600MM DISC Sn

NOTES

- Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.75mm Max.
- Connector view shown is from mating side.
- Label text must be 2mm max. in height with Arial font.
- Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
27/05/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	NTS	ANGULAR TOL ± °		
	4 PLACES ±		3 PLACES ±		
3 PLACES ±		2 PLACES ±		EC NO: 665607	2021/05/27
2 PLACES ±		1 PLACE ±		DRWN: ARAJU	
1 PLACE ±		0 PLACES ±		CHK'D: RDESAI01	2021/05/31
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	INITIAL REVISION:
			A4-SIZE	218397	DRWN: ARAJU
					APPR: RDESAI01
					2021/05/27
					2021/05/31
DOCUMENT STATUS		P1	RELEASE DATE	2021/05/31	12:34:34
DOCUMENT NUMBER		CUSTOMER		SHEET NUMBER	
2183971020		GENERAL MARKET		1 OF 1	