REV.	DATE	DESCRIPTION
A	01/12/02	REMOVE CONTACT PIN

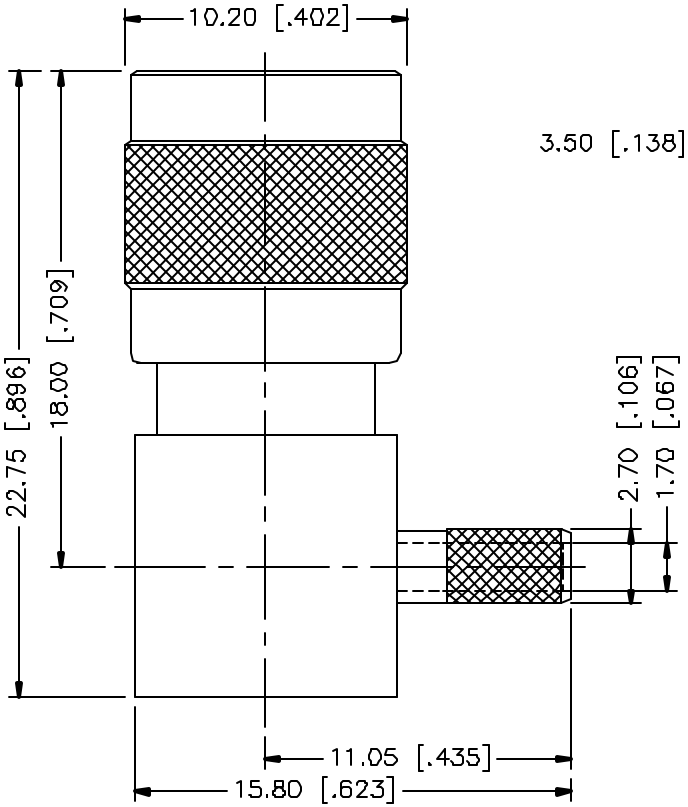

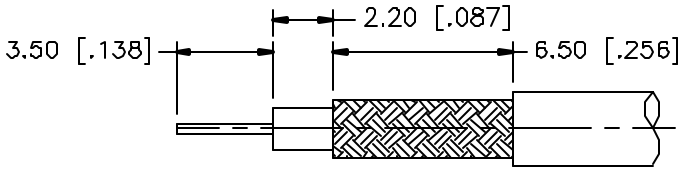

RECOMMENDED
CABLE STRIPPING DIM'S

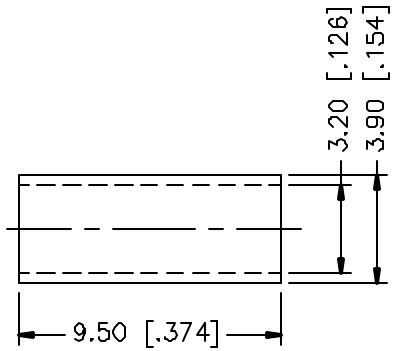

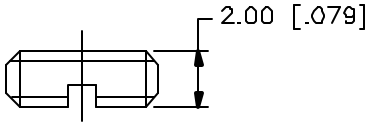

CRIMP NOTES:

1) CRIMP FERRULE
HEX CRIMP SIZE .128"

	DESCRIPTION	MATERIAL	FINISH
1	BODY	BRASS	GOLD
2	INSULATOR	TEFLON	NATURAL
3	CONTACT PIN	BER COPPER	GOLD
4	FERRULE	COPPER	GOLD
5			
6			
7			
8			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1
315–1000 = ± 1.6
1000–2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	01/12/02
CHECKED		
ISSUED		

Connex
Connector Corporation

TITLE: SMB R/A SNAP LOCK CRIMP PLUG (FOR RG–179/U, 187A/U CABLE – 75ohms)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	142286.DWG	A

SCALE	PART NO.	SHEET
NA	142286	1 OF 1