

6

5

4

3



2

1

MATERIAL AND FINISH:



Insulator: Nylon 66, black, UL-94V-1 rated
Contacts: Brass, Tin plated

ELECTRICAL SPECIFICATIONS:



Current rating: 10 A 
Voltage rating: 250 VAC
Current rating: 15 A 
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute
Operating Temperature: 70°C

**RoHS
COMPLIANT**

NOTES:
Recommended panel thickness
0.8mm max. to 3.5mm max.

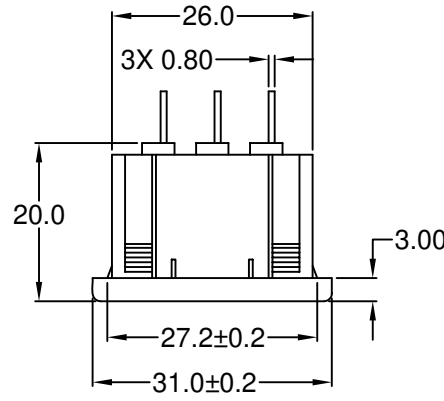

**RECOMMENDED
PANEL CUTOUT**

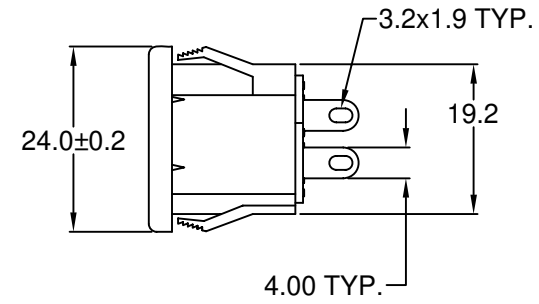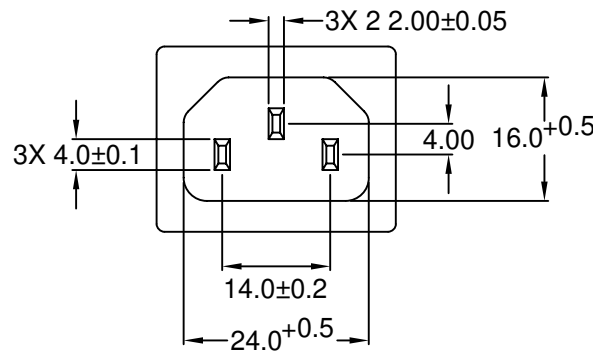

PANEL THICKNESS	A
0.8 - 1.2	20.3
1.3 - 2.0	20.5

**TOLERANCE
UNLESS OTHERWISE SPECIFIED**

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY SS	DATE: 04/17/00
CHECK BY PB	DATE: 4/17/00
APPR BY SS	DATE: 4/17/00

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

**PART: UNIVERSAL IEC 60320 C14 APPL. INLET;
SOLDER TERMINALS, SNAP-IN**

PD-42R03-11		SHEET 1 of 1
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV: B	

D

C

B

A

REVISIONS	CHNG	CHK	APPR
	DATE	GO	TD
	REV	REVISD / REDRAWN	PANEL CUTOOUT DIM A
	A	10/24/01	PB
B	12/6/05	PB	