



## Pin strip - PST 1,3/ 2-LV-5,0 R32 - 1845580

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, nominal current: 14 A, number of positions: 2, pitch: 5 mm, Color: black, contact surface: Tin, The pin strip is made of highly temperature-resistant plastic and is therefore suitable for the reflow process.

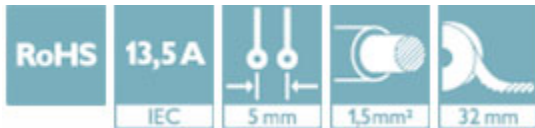

### Key Commercial Data

Packing unit	1
GTIN	 4 046356 966726
GTIN	4046356966726
Custom tariff number	85366990

### Technical data

#### Dimensions

Pitch	5 mm
Dimension a	5 mm
Constructional height	11.2 mm
Length of the solder pin	3.5 mm

#### General

Range of articles	PST 1,3/..-LV
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	13.5 A
Color	black
Number of positions	2

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Pin strip - PST 1,3/ 2-LV-5,0 R32 - 1845580

## Classifications

### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

### ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002643
ETIM 6.0	EC002643

### UNSPSC

UNSPSC 13.2	39121432
-------------	----------

## Approvals


### Approvals


#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

### Approval details


UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
	B	D	
Nominal current IN	10 A	10 A	
Nominal voltage UN	300 V	300 V	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
	B	D	
Nominal current IN	10 A	10 A	
Nominal voltage UN	300 V	300 V	

## Pin strip - PST 1,3/ 2-LV-5,0 R32 - 1845580

### Approvals

EAC		B.01742
-----	---	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>
------------------	---	---