


# NSYTRV702

## SCREW TERMINAL, FEED THROUGH, 2 POINTS, 70MM<sup>2</sup> , GREY

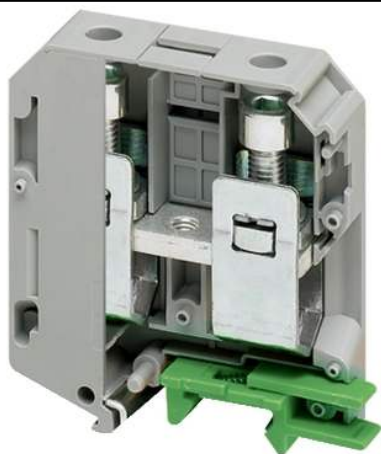

### Main

Range	Linergy
Product name	Linergy TR
Product or Component Type	Terminal block
Device short name	TRV
Accessory / separate part category	Connection accessory
Terminal block type	Passthrough
Terminal block level	1
Mounting Mode	Clip-on
Nominal cross section	0.11 in <sup>2</sup> (70 mm <sup>2</sup> )
Length	2.78 in (70.5 mm)
Color	Gray
Quantity per Set	Set of 10

### Complementary

Width	0.80 in (20.3 mm)
Height	3.44 in (87.5 mm)
Connections - terminals	1 x screw terminal upstream M8) 1 x screw terminal downstream M8)
Number of connections	2
Connection position	Sideways
Number of measurement input	1
Cable cross section	0.04...0.11 In <sup>2</sup> (25...70 mm <sup>2</sup> ), solid with cable end 0.04...0.11 In <sup>2</sup> (25...70 mm <sup>2</sup> ), solid without cable end 0.04...0.11 In <sup>2</sup> (25...70 mm <sup>2</sup> ), flexible with cable end 0.02...0.15 in <sup>2</sup> (16...95 mm <sup>2</sup> ), flexible without cable end
Tightening torque	70.81...88.51 lbf.in (8...10 N.m)
Wire stripping length	0.94 in (24 mm)
Tool type	Connection screwdriver Disconnection screwdriver
[Ue] rated operational voltage	1000 V EN/IEC 60947-7-1 1000 V CSA 600 V cURus
Line Rated Current	192 A EN/IEC 60947-7-1 192 A CSA 192 A cURus
Material	Polyamide 6/6 insulating case Copper alloy connector and screw Copper alloy commoning link Chromium-nickel steel spring
Dielectric loss	0.01 at 1 MHz IEC 60250 0.01 at 1 MHz VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 MΩ.M IEC 60093 10000 MΩ.m VDE 0303-T30
Surface resistance	1000 GΩ IEC 60093 1000 GΩ VDE 0303-T30
Creep resistance	500 CTI (> 400 kV) IEC 60093 500 CTI (> 400 kV) VDE 0303-T30
Flame retardance	V0 0.03 in (0.8 mm) UL 94
Net Weight	6.88 oz (195 g)

Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product Compatibility	Spacial enclosures

## Environment

Product Certifications	DNV CSA EAC CURus LR IEC-Ex VDE GL ATEX
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...266 °F (-40...130 °C) IEC 60216-1 -40...266 °F (-40...130 °C) VDE 0304-T21




## Ordering and shipping details

Category	21715-IEC TERMINAL BLOCKS-NSY,AM1,DF6,GK1
Discount Schedule	CP5
GTIN	3606480532238
Nbr. of units in pkg.	1
Package weight(Lbs)	5.11 oz (145.0 g)
Returnability	No
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.62 in (9.2 cm)
Package 1 width	4.53 in (11.5 cm)
Package 1 Length	14.25 in (36.2 cm)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	3.66 lb(US) (1.659 kg)
Package 2 Height	3.62 in (9.2 cm)
Package 2 width	4.53 in (11.5 cm)
Package 2 Length	14.25 in (36.2 cm)
Unit Type of Package 3	P06
Number of Units in Package 3	480
Package 3 Weight	204.96 lb(US) (92.968 kg)
Package 3 Height	28.94 in (73.5 cm)
Package 3 width	31.50 in (80 cm)
Package 3 Length	23.62 in (60 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes

China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Halogen content performance	Halogen free plastic parts product

### Contractual warranty

Warranty	18 months
----------	-----------