



FEMALE INSERT  
FACE VIEW




- 1 DRAIN WIRE
- 2 RED<V+>
- 3 BLACK<V->
- 4 WHITE (CAN-H)
- 5 BLUE (CAN-L)

MALE INSERT  
FACE VIEW



- 1 DRAIN WIRE
- 2 RED<V+>
- 3 BLACK<V->
- 4 WHITE (CAN-H)
- 5 BLUE (CAN-L)

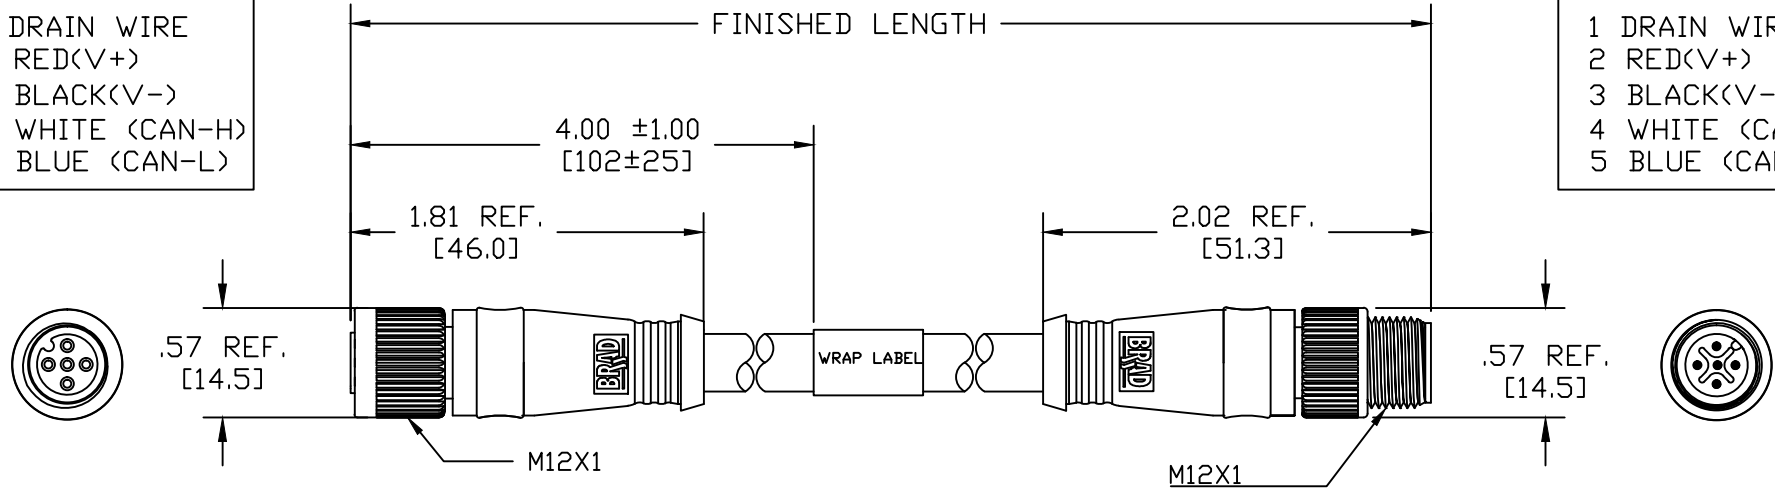

MECHANICAL  
 CONTACT: GOLD/NICKEL OVER COPPER ALLOY  
 INSERT : BLACK NYLON  
 O-RING: RED VITON  
 COUPLING NUT: ZINC DIECAST WITH BLACK EPOXY COATED  
 MOLDED BODY: GREY PVC  
 CABLE COLOR: LIGHT BLUE  
 CABLE MARKING: KND-SB<THIN> DeviceNet KURAMO E200151-K(UL) CL2  
 1PR22AWG 1PR24AWG SHIELDED 75C CSA AWM  
 I/II A/B 80C 300V FT4 LF

cable length  
 M020----2 Meter  
 M100-----10 Meter

ELECTRICAL  
 VOLTAGE RATING: 250V AC/DC  
 AMPERAGE: 4A

ENVIRONMENTAL  
 PROTECTION: IP67  
 OPERATION TEMP: 0°C~80°C

CABLE MARKING UPDATE EC NO: IFC2015-1192 DRWN: CAUVILLES 2014/12/30 CHKD: TWOLDEGE APPR: JFMURPHY 2012/11/02	DESCRIPTION REV B	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ±--- ±---	mm INCH	DRAWN BY DATE TWOLDEGE 2011/07/06	TITLE DEVICE NET ASSEMBLY 5 POLE M/FE STRAIGHT KND-SB LIGHT BLUE PVC					
		3 PLACES ±--- ±.005	±.13 ±.010	CHECKED BY DATE BARDEN ---	MOLEX INCORPORATED					
		2 PLACES ±.025 ±.020	ANGULAR ±---°	APPROVED BY DATE JFMURPHY 2012/11/02	MATERIAL NO.	DOCUMENT NO. SD-130261-001	SHEET NO. 1 OF 1			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					