

# PC 125/35 LT



Sample image

**Order symbol:** PC 125/35 LT

**Product nbr:** 6012907

UL Code: 6412907

UL Name: UL PC 125/35 LT

**Description:** Enclosure. PC


**Remarks:** Smoked transparent cover

**Including:** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

**EAN:** 6418074022318

**El. number:**

- Finland: 3420431
- Denmark: 8212022360
- Sweden: 2535621

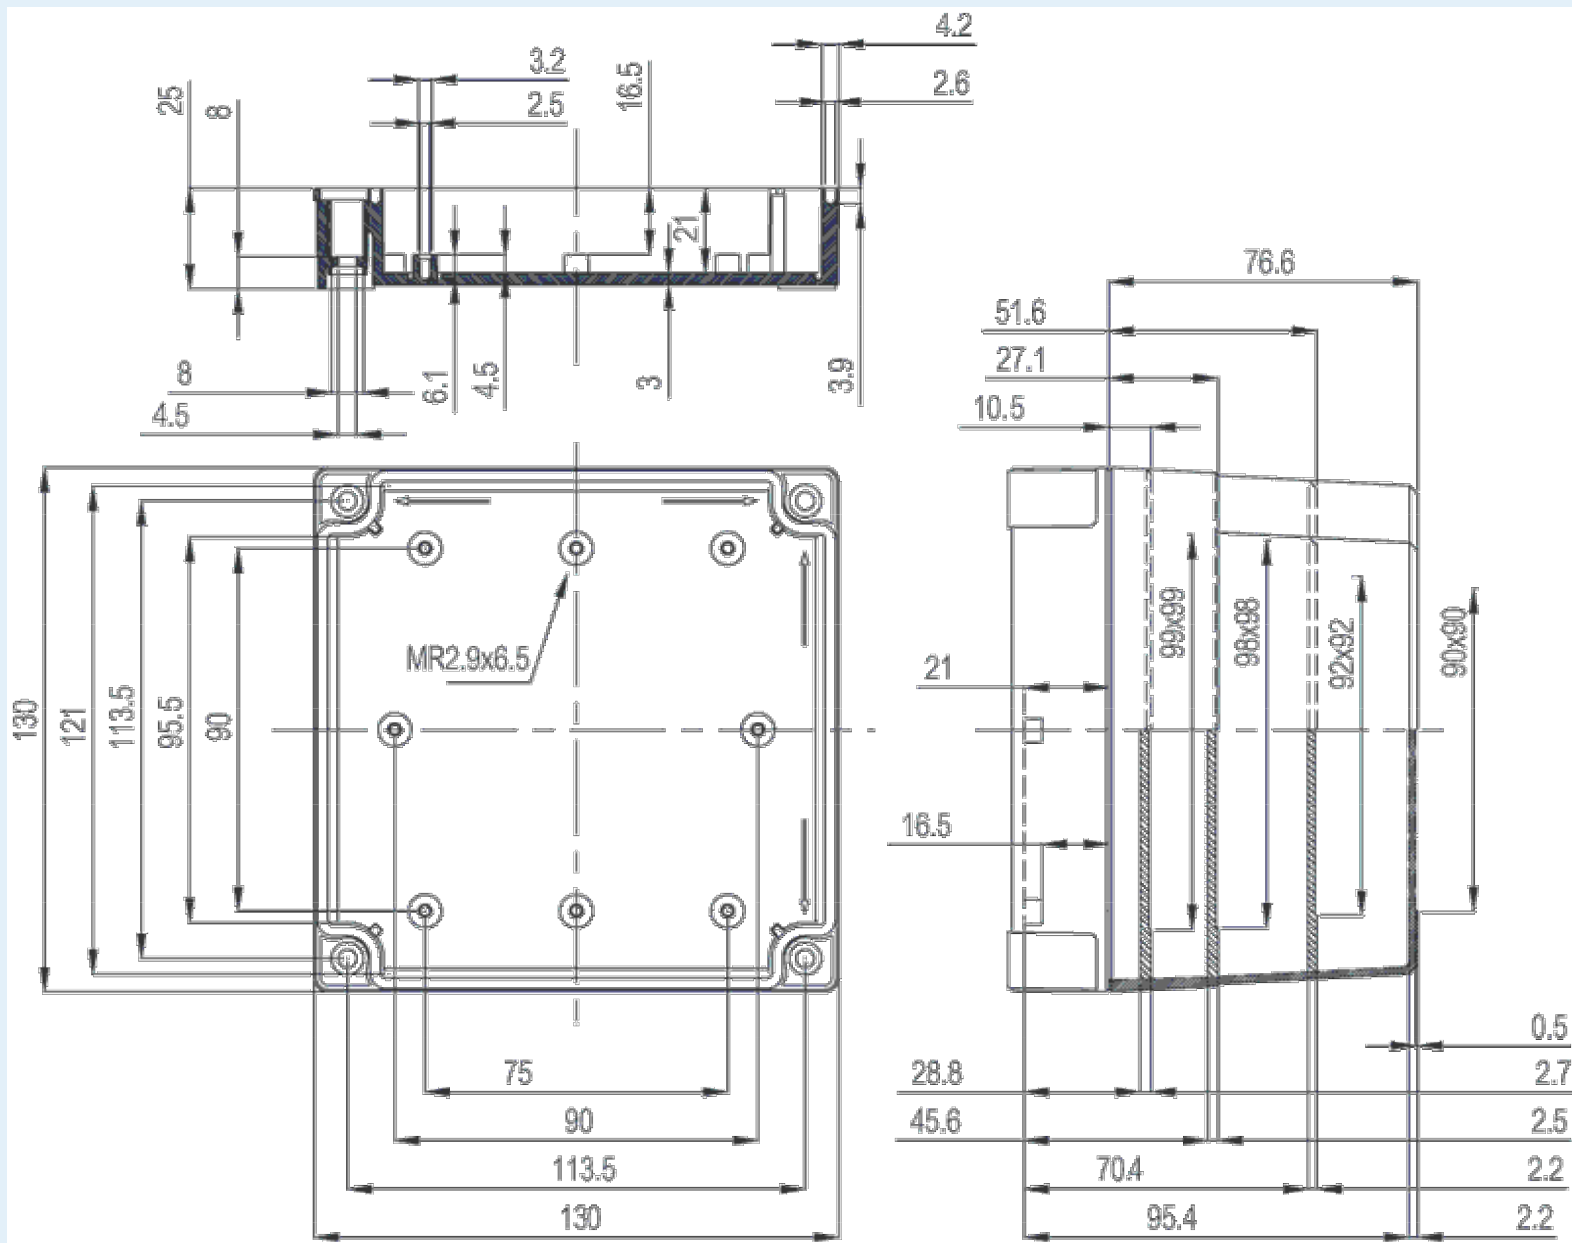

#### Dimensions:

|       | Height | Width | Depth |
|-------|--------|-------|-------|
| mm:   | 130    | 130   | 35    |
| inch: | 5.12   | 5.12  | 1.38  |

#### Materials:

|                  |                      |
|------------------|----------------------|
| Material:        | Polycarbonate        |
| Base colour:     | RAL 7035 -light grey |
| Cover colour:    | Clear transparent    |
| Gasket material: | Polyurethane         |

#### Temperatures:

|                               |             |
|-------------------------------|-------------|
| Temperature °C (short term):: | -40 ... 120 |
| Temperature °C (continuous):  | -40 ... 80  |
| Temperature °F (short term):  | -40 ... 250 |
| Temperature °F (continuous):  | -40 ... 175 |

#### Accessories:

|              |  |
|--------------|--|
| MIV 10       | DIN-35 Mounting rail. for enclosures: (100 x 35 x 1)         |
| HFP 130      | Front panel hinge series for FP A 100-125                    |
| FP A 125/130 | Front panel (Aluminum). for enclosures: (120 x 112 x 1)      |
| MIN 10       | DIN-15 Mounting rail. for enclosures: (100 x 15 x 1)         |
| FP 22046     | Mounting foot kit (4 pcs)                                    |
| MIV 125      | Back Panel (Galvanized steel). for enclosures: (98 x 98 x 1) |

#### Rating:

|  |                   |
|--|-------------------|
| Ingress protection (EN 60529):         | IP66; IP67;       |
| Impact Resistance (EN 62262):          | IK08;             |
| Electrical insulation:                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1                 |

|                                  |            |
|----------------------------------|------------|
| UV resistance:                   | UL 508     |
| Flammability Rating:             | UL 746C 5" |
| Glow Wire Test (IEC 695-2-1) °C: | 960 °C     |
| NEMA Class                       |            |

**Certificates:**

Certificate FI 40847