




REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Victory	2019/08/20

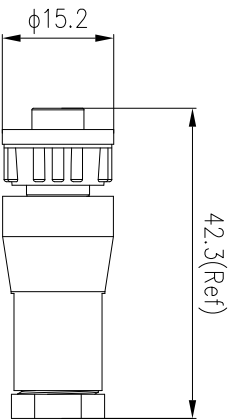

21XXX211-01  
Pin Number

2 Pin	3 Pin	4 Pin
P/N: 21002211-01	P/N: 21003211-01	P/N: 21004211-01

Pin Assignments Front View

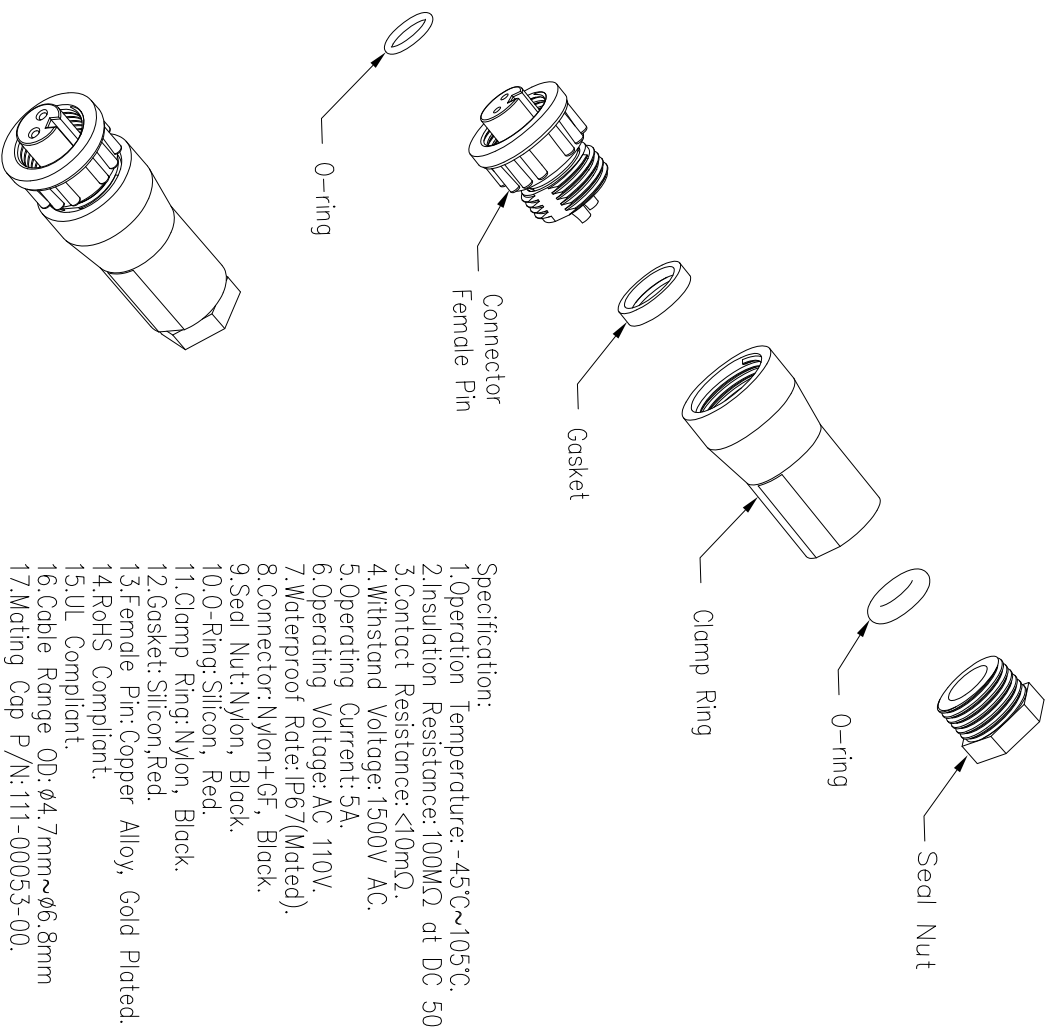

Specification:

1. Operation Temperature:  $-45^{\circ}\text{C} \sim 105^{\circ}\text{C}$ .
2. Insulation Resistance:  $100\text{M}\Omega$  at DC 500V.
3. Contact Resistance:  $<10\text{m}\Omega$ .
4. Withstand Voltage: 1500V AC.
5. Operating Current: 5A.
6. Operating Voltage: AC 110V.
7. Waterproof Rate: IP67 (Mated).
8. Connector: Nylon+GF, Black.
9. Seal Nut: Nylon, Black.
10. O-Ring: Silicon, Red.
11. Clamp Ring: Nylon, Black.
12. Gasket: Silicon, Red.
13. Female Pin: Copper Alloy, Gold Plated.
14. RoHS Compliant.
15. UL Compliant.
16. Cable Range OD:  $\phi 4.7\text{mm} \sim \phi 6.8\text{mm}$
17. Mating Cap P/N: 111-00053-00.



UNIT: mm  
DESCRIPTION  
Mini Series Screw Type  
Male Plug With Female Pin

TOLERANCE	$\pm 0.25$
.X	$\pm 0.15$
.XX	$\pm 0.05$
.XXX	$\pm 0.05$
ANGLES	$\pm 1^{\circ}$

SCALE	1:1	SHEET	1 OF 1
REV	C1	SIZE	A4
*: Inspection Item			

**CHOGORI**

PART NO	21XXX211-01	DRAWN BY	Victory	DATE	2019/08/20
DWG NO		CHECKED BY	Ivan	DATE	2019/08/20
CUSTOMER		APPROVED BY	Ponson	DATE	2019/08/20