


Features

- Bidirectional ESD protection of one line
- Very low diode capacitance: $C_d = 11 \text{ pF}$
- Max. peak pulse power: $P_{PP} = 45 \text{ W}$
- Low clamping voltage: $V_{CL} = 12.5 \text{ V}$
- Ultra low leakage current: $I_{RM} < 1 \text{ nA}$
- ESD protection up to 30 kV
- IEC 61000-4-2; level 4 (ESD)
- IEC 61000-4-5 (surge); $I_{PP} = 4.8 \text{ A}$
- AEC-Q101 qualified

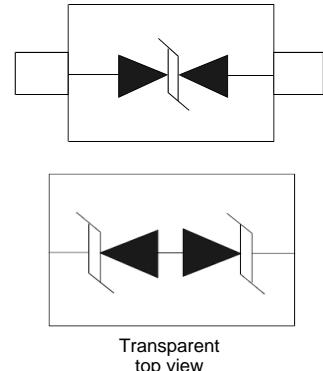

Applications

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories
- Subscriber Identity Module (SIM) card protection
- Communication systems
- Portable electronics
- 10/100 Mbit/s Ethernet
- FireWire

Mechanical Data

- SOD-882 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

Quick reference data

Quick reference data

$T_{amb} = 25 \text{ }^{\circ}\text{C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{RWM}	reverse standoff voltage		-	-	5	V
C_d	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V}$	-	11	13	pF

Ordering information

Ordering information

Type number	Package			Version
	Name	Description		
PESD5V0V1BA	SC-76	plastic surface-mounted package; 2 leads		SOD323
PESD5V0V1BB	SC-79	plastic surface-mounted package; 2 leads		SOD523
PESD5V0V1BL	-	leadless ultra small plastic package; 2 terminals; body 1.0 ? 0.6 ? 0.5 mm		SOD882

Limiting values

Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
P _{PP}	peak pulse power	t _p = 8/20 ?s	[1]	-	45	W
I _{PP}	peak pulse current	t _p = 8/20 ?s	[1]	-	4.8	A

Limiting values ...continued

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
Per device					
T _j	junction temperature		-	150	°C
T _{amb}	ambient temperature		-55	+150	°C
T _{stg}	storage temperature		-65	+150	°C

[1] Non-repetitive current pulse 8/20 ?s exponential decay waveform according to IEC 61000-4-5.

ESD maximum ratings

T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Max	Unit	
V _{ESD}	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	[1]	-	30	kV
		machine model	-	2	kV	
		MIL-STD-883 (human body model)	-	16	kV	

[1] Device stressed with ten non-repetitive ESD pulses.

ESD standards compliance

Standard	Conditions
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3B (human body model)	> 8 kV

Characteristics

Characteristics

$T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V_{RWM}	reverse standoff voltage			-	-	5	V
I_{RM}	reverse leakage current	$V_{RWM} = 5\text{ V}$		-	< 1	10	nA
V_{BR}	breakdown voltage	$I_R = 5\text{ mA}$		5.8	6.8	7.8	V
C_d	diode capacitance	$f = 1\text{ MHz};$ $V_R = 0\text{ V}$		-	11	13	pF
V_{CL}	clamping voltage	$I_{PP} = 4.8\text{ A}$	[1]	-	-	12.5	V
r_{dyn}	dynamic resistance	$I_R = 10\text{ A}$	[2]	-	0.2	-	Ω
r_{dif}	differential resistance	$I_R = 5\text{ mA}$		-	-	35	Ω

[1] Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC 61000-4-5.

[2] Non-repetitive current pulse, Transmission Line Pulse (TLP) $t_p = 100\text{ ns}$; square pulse;
ANS/IESD STM5.1-2008.

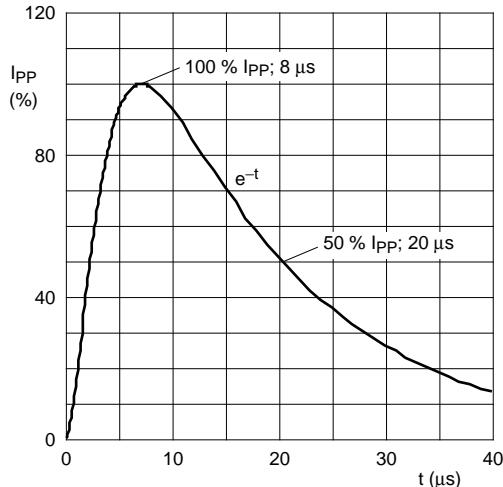


Fig 1. 8/20 μs pulse waveform according to IEC 61000-4-5

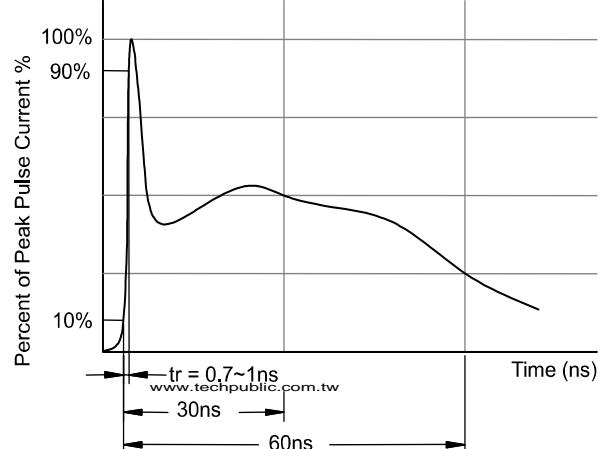


Fig 2. ESD pulse waveform according to IEC 61000-4-2

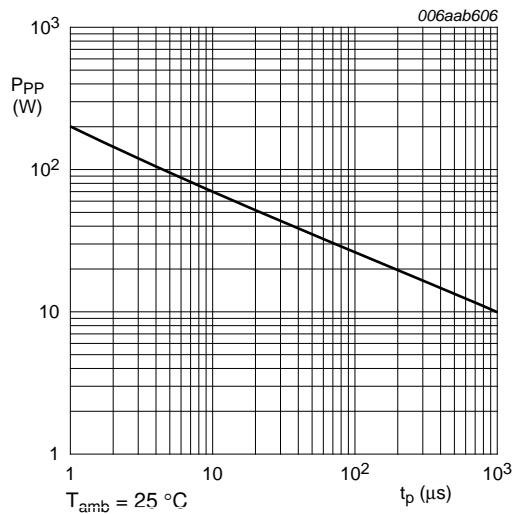


Fig 3. Peak pulse power as a function of exponential pulse duration; typical values

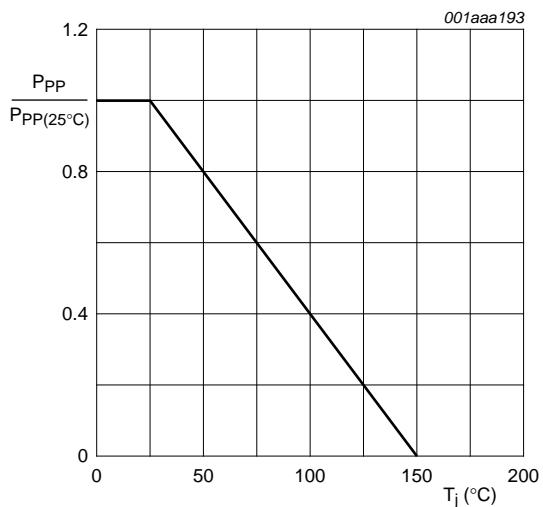


Fig 4. Relative variation of peak pulse power as a function of junction temperature; typical values

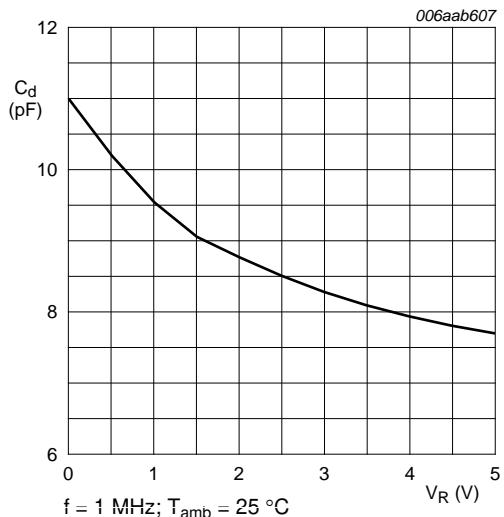


Fig 5. Diode capacitance as a function of reverse voltage; typical values




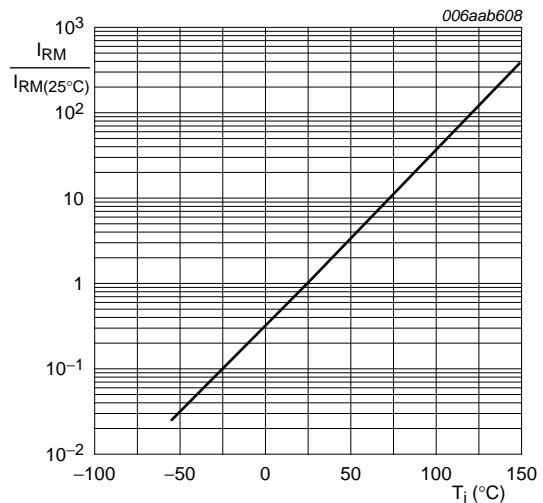


Fig 6. Relative variation of reverse leakage current as a function of junction temperature; typical values

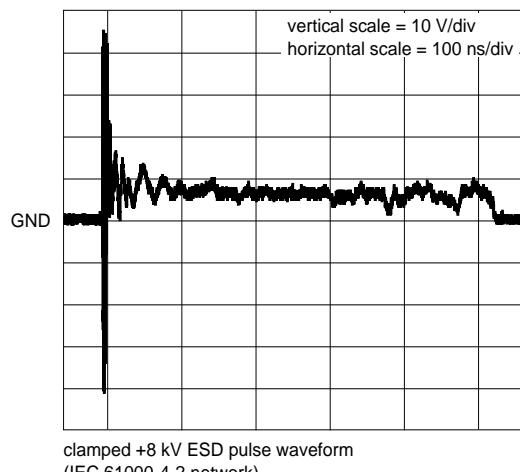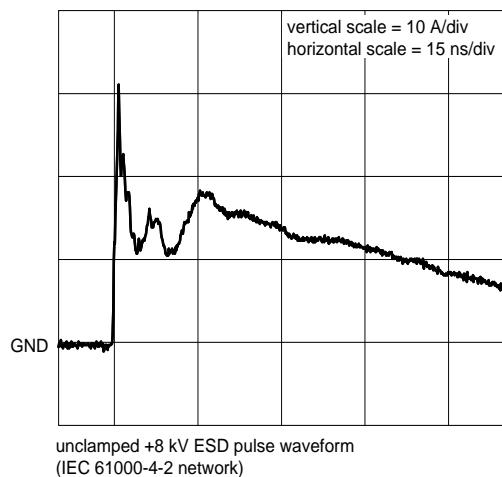


Outline Drawing – SOD-323/SOD-523/SOD-882

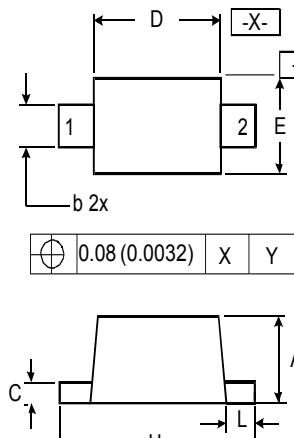


DIMENSIONS					
SYMBOL	MILLIMETER		INCHES		
	MIN	MAX	MIN	MAX	
A	0.50	0.70	0.020	0.028	
b	0.25	0.35	0.010	0.014	
C	0.07	0.20	0.0028	0.0079	
D	1.10	1.30	0.043	0.051	
E	0.70	0.90	0.028	0.035	
H _E	1.50	1.70	0.059	0.067	
L	0.15	0.25	0.006	0.010	

SOD-523

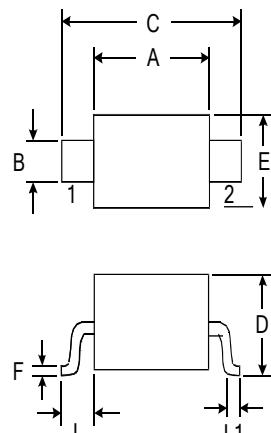

SOD-323


DIMENSIONS					
SYMBOL	MILLIMETER		INCHES		
	MIN	MAX	MIN	MAX	
A	1.600	1.800	0.063	0.071	
B	0.250	0.350	0.010	0.014	
C	2.500	2.700	0.098	0.106	
D			1.000		0.039
E	1.200	1.400	0.047	0.055	
F	0.080	0.150	0.003	0.006	
L	0.475 REF		0.019REF		
L1	0.250	0.400	0.010	0.016	
H	0.000	0.100	0.000	0.004	

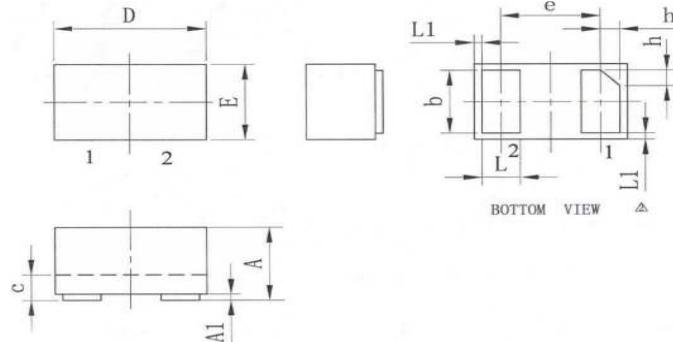

SOD-882

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
c	0.12	0.15	0.18
D	0.95	1.00	1.05
e		0.65BSC	
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1		0.05REF	
h	0.07	0.12	0.17
载体尺寸 (W×L)	20*20		

Marking

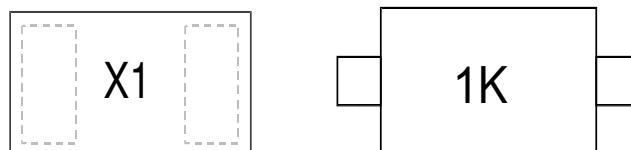

Ordering information

Order code	Marking codes	Package	Baseqty	Delivery mode
UMW PESD5V0V1BA	1K	SOD-323	10000	Tape and reel
UMW PESD5V0V1BB	Z9	SOD-523	10000	Tape and reel
UMW PESD5V0V1BL	X1	SOD-882	10000	Tape and reel