
6-1971773-4 - ACTIVE

Power Triple Lock TE Internal #: 6-1971773-4 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > High Temperature Plug — POWER TRIPLE LOCK

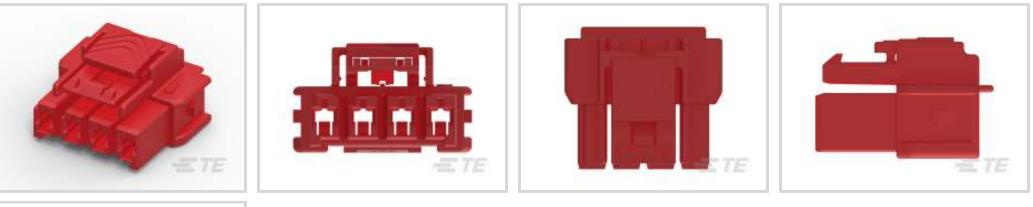



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 6 mm [.236 in]

All High Temperature Plug — POWER TRIPLE LOCK (43)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Power Positions	4
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 VDC
Body Features	

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°
Connector & Keying Code	В
Contact Features	
Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Receptacle
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Red
Housing Material	Nylon
Dimensions	
Connector Height	14.95 mm

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power
Identification Marking	
Circuit Identification Feature	With
Industry Standards	
Glow Wire Material Rating	Material with GWIT \geq 775°C
UL Rating	Recognized
Agency/Standard	UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 850°C (Flame ≤ 30 sec)
Packaging Features	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Packaging Method	Carton
Other	
Power Connectors Comment	Complies with IEC 61984 Specification
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Power Triple Lock

& For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



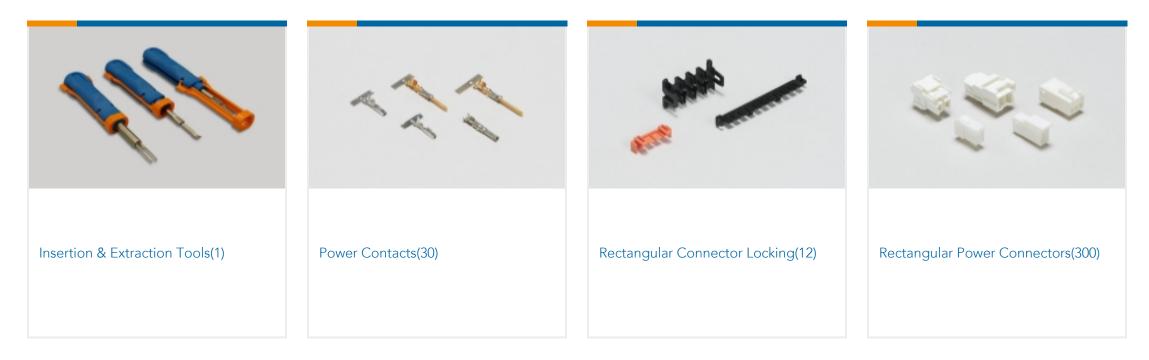

Customers Also Bought



ED 2 5 TDA Housing 12 Dec	
EP 2.5 TPA Housing, 13 Pos	

TE Part #1-282003-1

TE Part #8-2338183-4

Documents

TE Part #1-1969442-3

Product Drawings

PTL 1X4 PLUG HSG HIGH TEMP KEY B RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1971773-4_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1971773-4_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1971773-4_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Product Specifications Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals VDE Certificate

English

VDE Certificate

English