532431-8 - ACTIVE

AMP-HDI

TE Internal #: 532431-8 PCB Mount Receptacle, Right Angle, Board-to-Board, 165 Position, 2.54 mm [.1 in] Centerline, Gold, Through Hole - Solder, Signal, Black

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: PCB Mount Receptacle

PCB Mount Orientation: Right Angle

Connector System: Board-to-Board

Number of Positions: 165

Number of Rows: 3

Features



Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle				
Connector System	Board-to-Board				
Sealable	No				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Stackable	No				
PCB Mount Orientation	Right Angle				
Number of Positions	165				
Number of Rows	3				
Electrical Characteristics					
Insulation Resistance	3 MΩ				
Body Features					
Primary Product Color	Black				

PCB Mount Receptacle, Right Angle, Board-to-Board, 165 Position, 2.54 mm [.1 in] Centerline, Gold, Through Hole - Solder, Signal, Black



Contact Features

Mating Square Post Dimension	.64 mm[.025 in]
Contact Layout	Matrix
Contact Shape & Form	Four Beam
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Rectangular Termination Post & Tail Width	.58 mm[.023 in]
Termination Post & Tail Length	4.57 mm[.18 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	Without
Mating Alignment Type	Keyed
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic
Dimensions	
Connector Height	9.14 mm[.36 in]
PCB Thickness (Recommended)	2.36 mm[.76 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
Operation/Application	
Assembly Process Feature	None

C For support call+1 800 522 6752

PCB Mount Receptacle, Right Angle, Board-to-Board, 165 Position, 2.54 mm [.1 in] Centerline, Gold, Through Hole - Solder, Signal, Black



Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	3
Packaging Type	Tube
FU RoHS Directive 2011/65/FU	Not Compliant
EU RoHS Directive 2000/53/EC	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Solder Process Capability

Not lead free process capable


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

PCB Mount Receptacle, Right Angle, Board-to-Board, 165 Position, 2.54 mm [.1 in] Centerline, Gold, Through Hole - Solder, Signal, Black



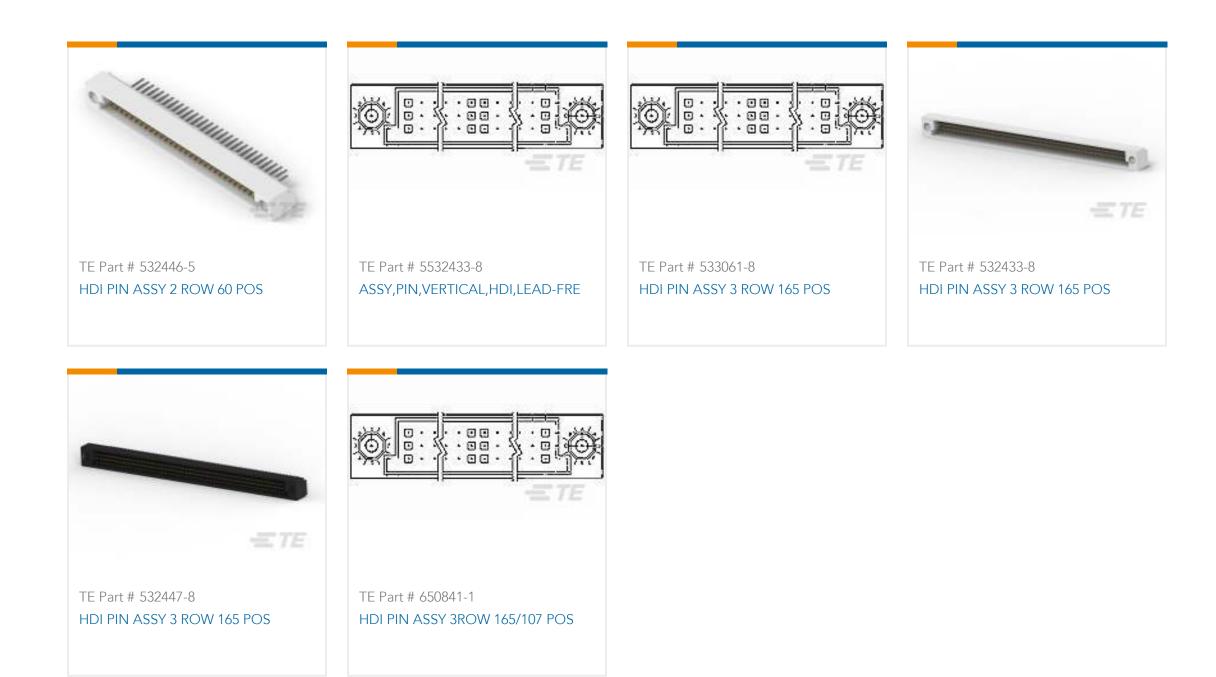

Customers Also Bought

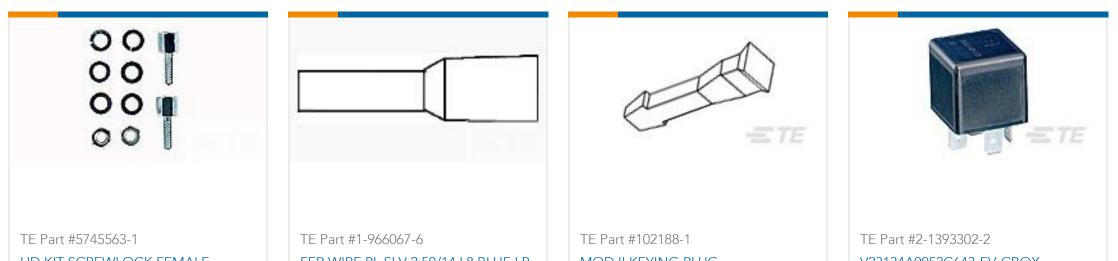

HD KIT,SCREWLOCK FEMALE	FER,WIRE,PL SLV,2.50/14,L8,BLUE,LP	MOD II KEYING PLUG	V23134A0052C643-EV-CBOX
TE Part #1-532436-2 HDI PIN ASSY 4 ROW 300 POS	TE Part #1617034-4 HFW1501S09 = HFW 1/2 SIZE RELA		

Documents

Product Drawings HDI RECP ASSY 3 ROW 165 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_532431-8_U.2d_dxf.zip

PCB Mount Receptacle, Right Angle, Board-to-Board, 165 Position, 2.54 mm [.1 in] Centerline, Gold, Through Hole - Solder, Signal, Black



English

Customer View Model ENG_CVM_CVM_532431-8_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_532431-8_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages 1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications Application Specification

English

Product Environmental Compliance Product Compliance

English

Product Compliance

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

Agency Approval Document

English