


DATE	REV	ECN	APP'D. BY
06/12/19	A0	Released	AB
08/06/19	A1	11432	AB

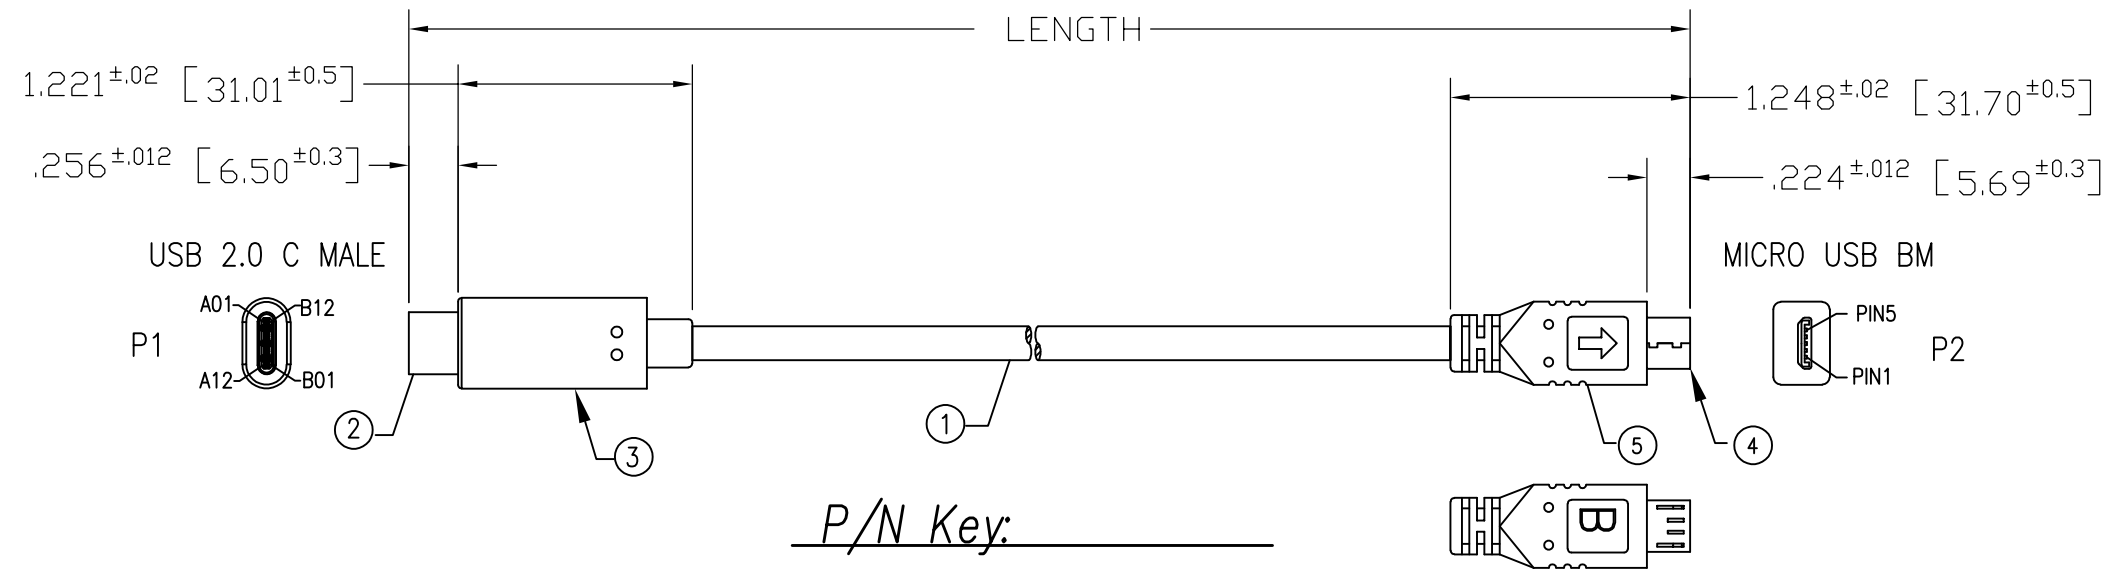

P/N Key:
 SC-2CMKxxxM
 Length
 010 = 1 Meter
 020 = 2 Meter


- Notes:
- Cable:
 - USB 2.0 STYLE TWISTED PAIR 28AWG/2C
 - 26AWG/2C
 - OD: 4.5MM
 - Color: Black
 - Marking: HI-SPEED USB REVISION 2.0 SHIELDED 28AWG/1PR+26AWG/2C (UL) E305668 TYPE CM 75' CSA 204790 TYPE CM 75' MSL
 - Connector P1
 USB C Male, Gold Flash on Contacts With PCB, Black Insulator, resistance R1= 5.1k ohm
 - Molded Boot PVC Color Black
 - Connector P2:
 Micro USB B Male, Gold Plated Contacts Black Insulation, Solder Type
 - Molded Boot PVC Color Black
 - Electrical Test:
 - 100%Test(Open ,short ,Wire Map)
 - Packaging: Each cable assembly to be individually bagged

PIN ASSIGNMENT			
P1		P2	
A4+B4+A9+B9	—————	1	RED 26#
A7	~~~~~	2	WHITE
A6	~~~~~	3	GREEN
A1+B1+A12+B12	—————	5	BLACK 26#
SHIELD	—————	SHIELD	

Example Parts Numbers

Meter	
P/N	DIM L
SC-2CMK010M	1000mm ± 20mm
SC-2CMK020M	2000mm ± 30mm

For Part Numbers Not Shown Follow Part Number Key Format



THIRD ANGLE PROJECTION 	 stewart CONNECTOR a bel group	11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	TITLE: Cable Assembly, USB 2.0, Type C/M – USB MICRO B/M, Black	
DIMENSIONS: INCHES [METRIC]	THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR.	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°	DRN BY: GWL	DATE 05/30/19
SHEET NO. 1 OF 1	APPD BY: AB	DATE 06/12/19
	DWG NO. CT999195	REV. A1

ASSEMBLY FORMAT REV. 6/3/05

B

B

A

A