

APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/18	

D

C

B

A

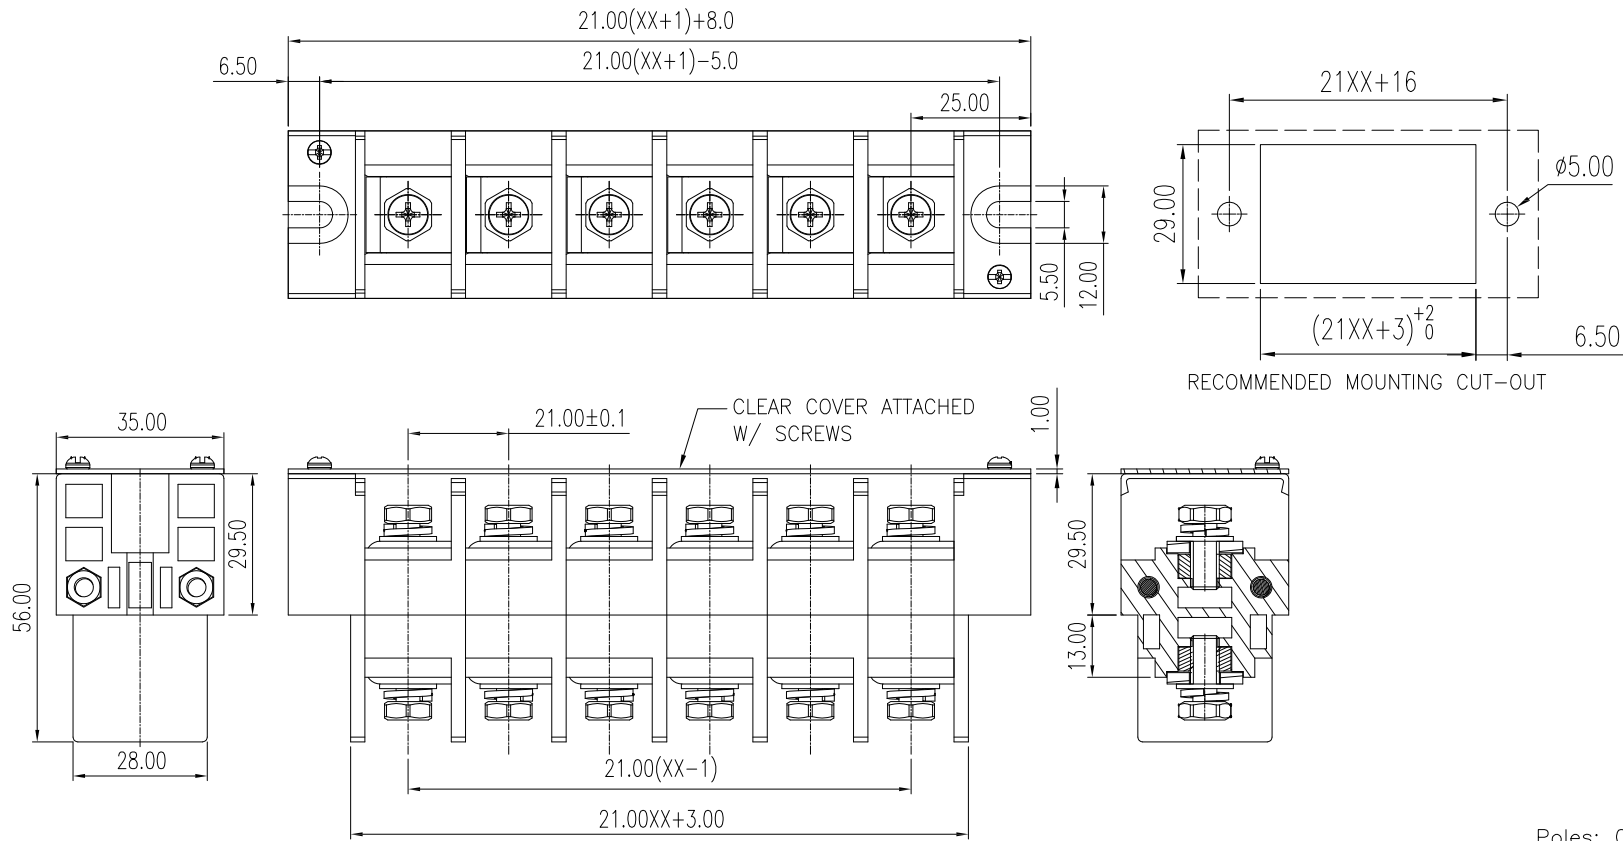

Poles: 01 thru 15

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Tin plated
 Screw: M6 Steel, Zinc plated
 Electrical:
 Voltage rating: 600 V
 Current rating: 115 A
 Contact resistance: 20 mohms
 Insulation resistance: 1000 Mohms / DC500V
 Dielectric withstanding voltage: 2,500 VAC for 1 minute
 Mechanical:
 Wire Range: 8~2 AWG
 Torque: 3.0Nm
 Temperature Rating:
 -40°C to +130°C
 Environmental:
 Lead free, RoHS compliant.



linear dimension (Tolerances Standard)	≡												-		∕		∥		⊥	
	to	over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to				
variable range	to 6	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250	all	to 5	to 30	to 120	to					
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4				

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
SEE CHART		TITLE TERMINAL BLOCK, .827 [21.00] PITCH W/ CLEAR COVER			
APPROVALS		DATE		SIZE X	PART NO. TBU-XX-W4-CCS
DRAWN AY		11/26/18			
CHECKED AC		11/26/18			REV. -
APPROVED		REF: S00067C	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1

6

5

4

3

2

1