
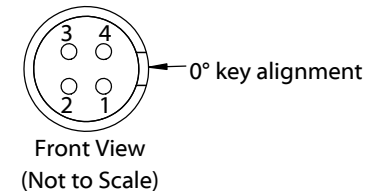



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	51-00016.M	Connector, PPL7, 4C, 0° plug, 7x38 mm, chrome, solder, Ø2.2-5.2 mm wire, molding style	2	
2	30-00913	Wire, 3C BC, 24 AWG, UL20280, 300V, 80C, 4.5 mm braided shield, FT2, TPU	1	
3	24-00206	Overmold, PPL7 strian relief, 10x24 mm	2	

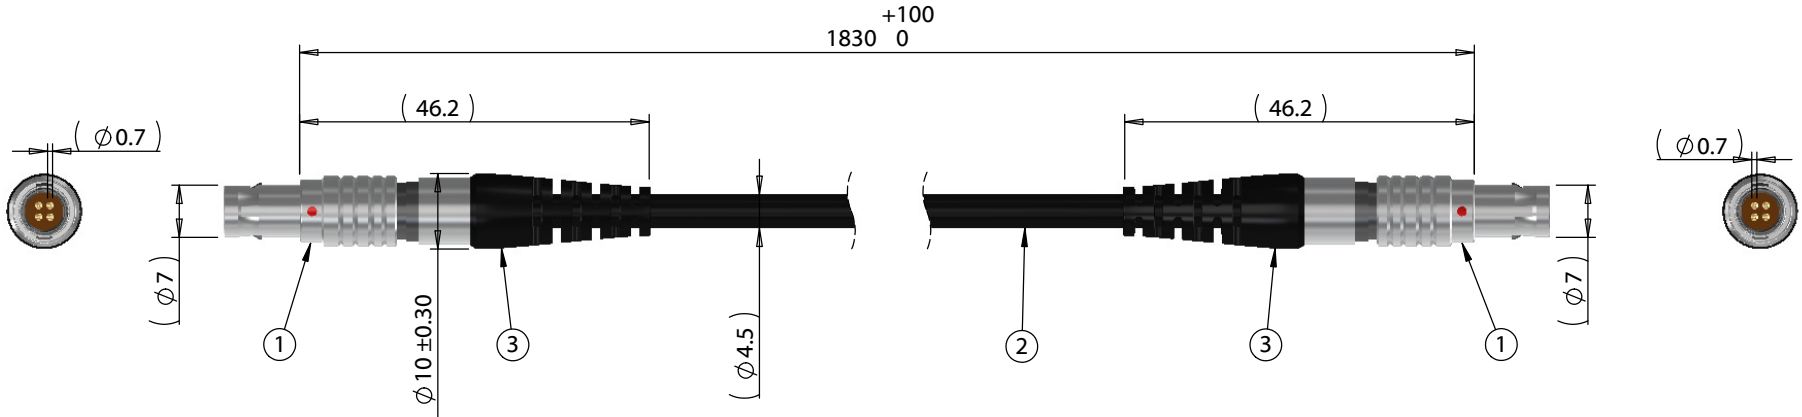

Wiring Diagram		
50-00016.M	wire color	50-00016.M
1	Red	1
2	White	2
3	Black	3
4	Drain/Shield	4

Revision:	Date:	Description:	Prepared:	Notes:  RoHS compliant  Function test: no open, no short circuit, no intermittent  Description: Cable, 1830 mm, 4C PPL7 plug 51-00016.M to same, 24 AWG, UL20280 30-00913	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	3/27/2018	Initial release	AG <small>Digitally signed by AG Date: 2018.04.19 13:12:23 -07'00'</small>		
			Verified: AW <small>Digitally signed by AW Date: 2018.04.19 15:42:57 -07'00'</small>		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
Scale: 1:1		Part number: A 10-02261		Sheet 1 of 1	

5

4

3

2

1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com