

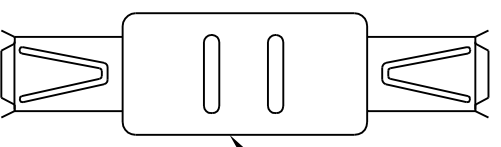
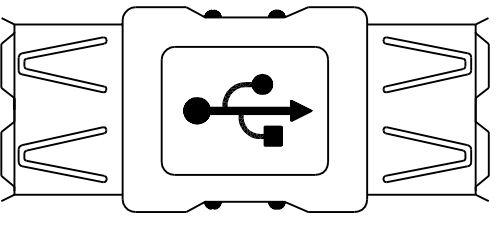


A B C D E F

DATE BY REVISION



BEIGE



INSULATOR MATERIAL  
:PBT, UL 94V-0  
CONTACT MATERIAL  
:Brass, Gold Plated Over Nickel

SHELL FINISH  
:Nickel Silver

OVERMOLD MATERIAL  
:PVC

CURRENT RATING  
:0.5mA

DIELECTRIC STRENGTH  
:1000V AC for one minute

INSULATOR RESISTANCE  
:1000MΩ min at 500V DC

CONFIGURATION:

A Female A Female

- 1 \_\_\_\_\_ 1
- 2 \_\_\_\_\_ 2
- 3 \_\_\_\_\_ 3
- 4 \_\_\_\_\_ 4
- G \_\_\_\_\_ G

|       |             |          |         |
|-------|-------------|----------|---------|
| DATE  | 17 JAN,2003 | PARTS NO |         |
| UNIT  | MM          | DRAWN NO | A-USB-4 |
| SCALE |             | BUYER NO | 002     |

TITLE:  
ADAPTER  
USB A FEMALE/FEMALE  
**A-USB-4**

|                         |               |       |       |
|-------------------------|---------------|-------|-------|
| DRAWN                   | Y.C.C<br>1/17 | CHECK | APPRO |
| ASSMANN ELECTRONICS.INC |               |       |       |