

ARTESYN AVQ200 WIDE INPUT

200 Watt Quarter Brick DC-DC Converter



Advanced Energy's Artesyn AVQ200-36S12 series is a single output DC/DC converter with standard quarter-brick form factor and pin configuration. It delivers up to 19A output current with 12V output. Ultra-high 93% efficiency and excellent thermal performance makes it an ideal choice to supply power in telecom and datacom. It can operate over an ambient temperature range of -40°C ~ +85°C with air-cooling.

SPECIAL FEATURES

- 200 W continuous power
- High efficiency: 93 %
- 18-75 Vdc wide range Telecom input range
- Baseplate optimised for contact cooling or heatsink mounting
- Open frame version optimised for aircooling
- Low ripple and noise
- Fixed switching frequency
- High capacitive load capability

- Pre-bias start-up capability
- High reliability
- RoHS 6/6 compliant
- UL94 V-0 materials
- DOSA footprint compliant
- Two year warranty (consult factory for extended terms)

SAFETY

- TUV/CE 62368-1
- UL/cUL 60950-1

DATA SHEET

Total Power:

200 Watts
(12 V @ 19 A)

Input Voltage:

18 - 75 V

of Outputs:

Single
(12 V nom)



ELECTRICAL SPECIFICATIONS

Input	
Input range	18 - 75 VDC
Input surge	100 V / 100 mSec
Input UVLO	Turn-on: 17.1 Vdc nom Turn-off: 15.6 Vdc nom Hysteresis: 1.5 Vdc
Input current maximum	15 Amps
Efficiency (48 Vin, 25 °C ambient)	93% at 12 V peak efficiency
I/O insulation I/O isolation	Basic insulation 1500 Vdc
Output	
Output voltage	12 V nominal set point
Output voltage regulation	12 V ± 1%
Output current maximum	19 A @ 12 V output voltage
Noise & ripple	80 mV pk-pk max (@ 12 V)
Overtemperature protection	Baseplate: 110 °C baseplate Open frame: 130 °C hotspot
Overvoltage protection Method / OVP operation	15.5 V nominal Auto recovery
Overcurrent protection Method / OCP operation	29 A nominal Auto recovery hiccup mode
Control	
Enable	Positive or Negative option
Output voltage trim range	-10% to +10% Vout
Switching frequency	300 KHz

ENVIRONMENTAL SPECIFICATIONS



Storage temperature	-40 °C to +105 °C
Ambient temperature	-40 °C to +85 °C
Baseplate operating temperature	-40 °C to +100 °C (no power derating)
MTBF	1 million hours target

ORDERING INFORMATION

Model number	Input voltage	Output voltage set-point	Output Current	Efficiency
AVQ200-36S12-6L	18 - 75 Vdc	12 V dc	19 A max	93% full load
AVQ200-36S12B-6L	18 - 75 Vdc	12 V dc	19 A max	93% full load


"-6" = 3.8 mm pin length
 "-L" = RoHS 6/6 compliant

MECHANICAL DRAWINGS

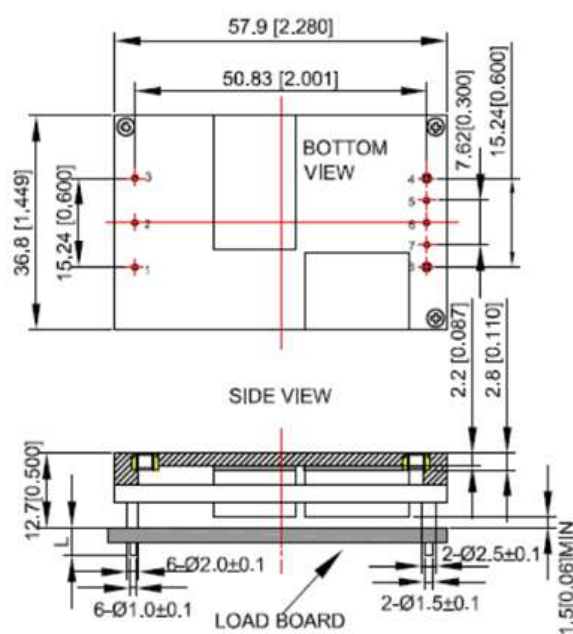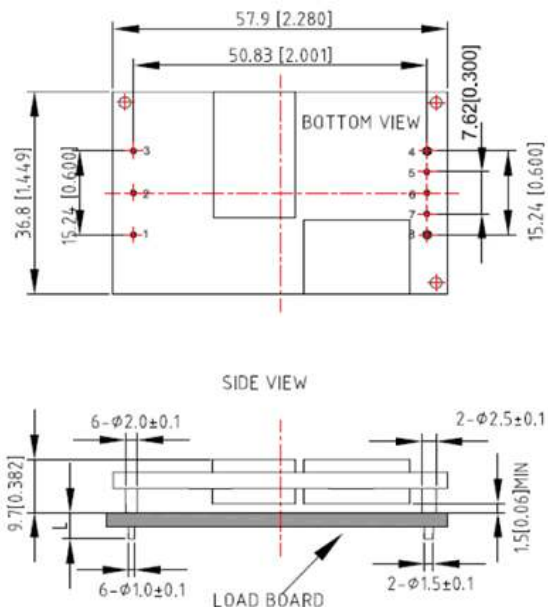

UNIT: mm[inch] BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]
 X.XXmm±0.25mm[X.XX in.±0.01in.]

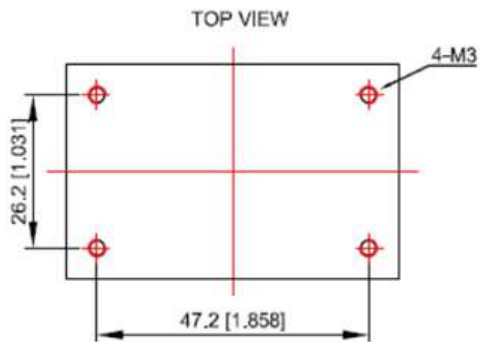

PIN LENGTH OPTION

Device Code Suffix	L
-4	4.8 mm+/-0.5 mm
-6	3.8 mm+/-0.5 mm
-8	2.8 mm+/-0.25 mm
NONE	5.8 mm+/-0.5 mm

PIN ASSIGNMENTS

Pin #		Function	
1	+V in	5	-Sense
2	Enable	6	Trim
3	-V in	7	+Sense
4	-V out	8	+V out

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.