

**SCHOTTKY RECTIFIER**

**240 Amp**


**Major Ratings and Characteristics**

Characteristics	242NQ030	Units
$I_{F(AV)}$ Rectangular waveform	240	A
$V_{RRM}$	30	V
$I_{FSM}$ @ tp=5 $\mu$ s sine	27,000	A
$V_F$ @ 240Apk, $T_J=125^\circ\text{C}$	0.42	V
$T_J$ range	-55 to 150	$^\circ\text{C}$

**Description/Features**

The 242NQ030 high current Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C  $T_J$  operation
- Unique high power, Half-Pak module
- Replaces four parallel DO-5's
- Easier to mount and lower profile than DO-5's
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

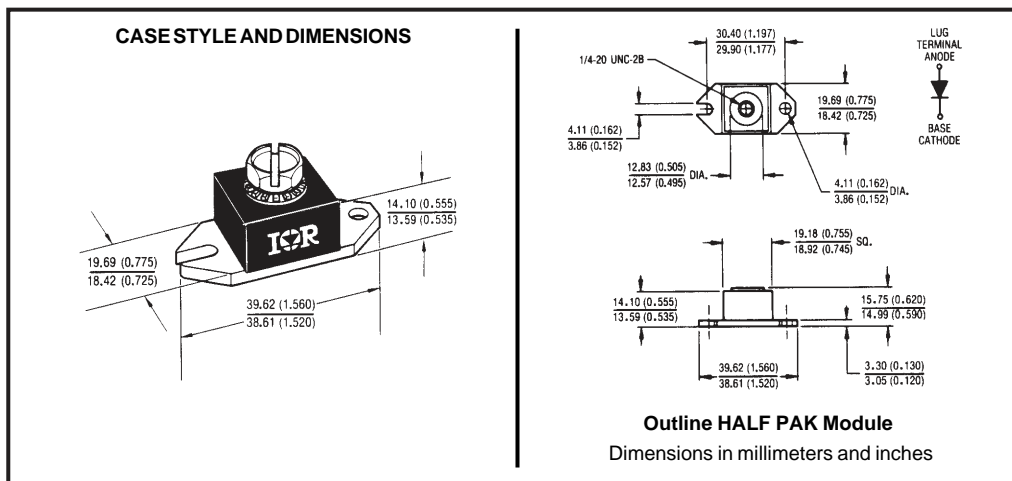

Voltage Ratings

Part number	242NQ030
V <sub>R</sub> Max. DC Reverse Voltage (V)	30
V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	242NQ	Units	Conditions
I <sub>F(AV)</sub> Max. Average Forward Current * See Fig. 5	240	A	50% duty cycle @ T <sub>C</sub> = 111°C, rectangular waveform
I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	27,000	A	5µs Sine or 3µs Rect. pulse
	3000		10ms Sine or 6ms Rect. pulse
E <sub>AS</sub> Non-Repetitive Avalanche Energy	216	mJ	T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 48 Amps, L = 0.19 mH
I <sub>AR</sub> Repetitive Avalanche Current	48	A	Current decaying linearly to zero in 1 µsec Frequency limited by T <sub>J</sub> max. V <sub>A</sub> = 1.5 x V <sub>R</sub> typical

Electrical Specifications

Parameters	242NQ	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (1) * See Fig. 1	0.51	V	@ 240A
	0.62	V	@ 480A
	0.42	V	@ 240A
	0.54	V	@ 480A
I <sub>RM</sub> Max. Reverse Leakage Current (1) * See Fig. 2	20	mA	T <sub>J</sub> = 25 °C
	1120	mA	T <sub>J</sub> = 125 °C
C <sub>T</sub> Max. Junction Capacitance	14,800	pF	V <sub>R</sub> = 5V <sub>DC</sub> , (test signal range 100Khz to 1Mhz) 25 °C
L <sub>S</sub> Typical Series Inductance	5.0	nH	From top of terminal hole to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V <sub>R</sub> )	10,000	V/ µs	

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	242NQ	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range	-55 to 150	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-55 to 150	°C	
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case	0.20	°C/W	DC operation * See Fig. 4
R <sub>thCS</sub> Typical Thermal Resistance, Case to Heatsink	0.15	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	25.6(0.9)	g(oz.)	
T Mounting Torque Terminal Torque	Min.	40(35)	Non-lubricated threads
	Max.	58(50)	
	Min.	58(50)	
	Max.	86(75)	
Case Style	HALF PAK Module		

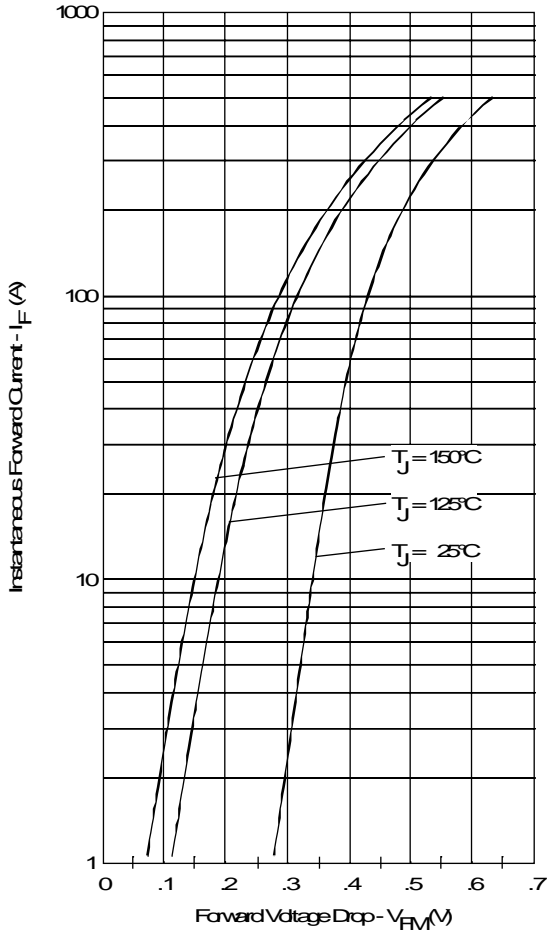


Fig. 1 - Maximum Forward Voltage Drop Characteristics

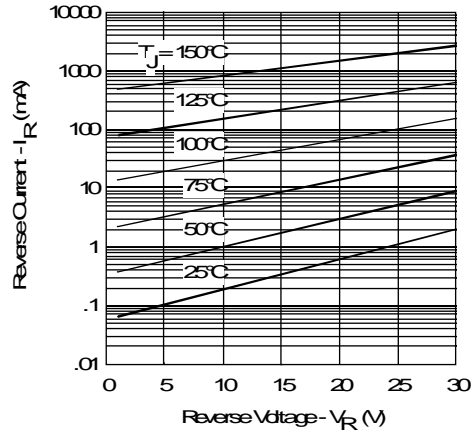


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

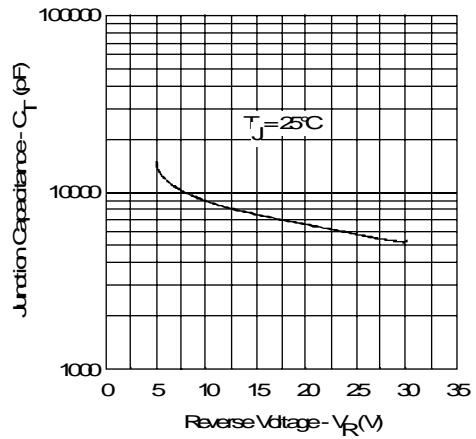


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

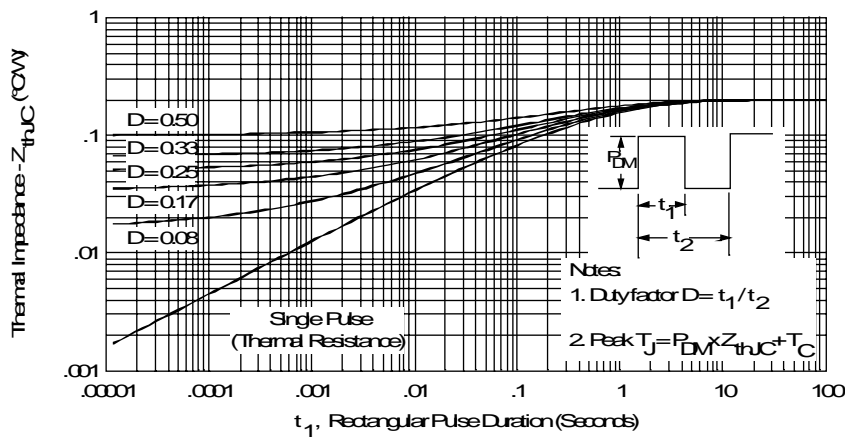


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

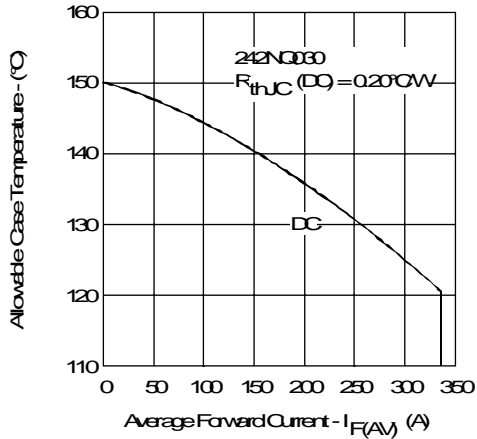


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

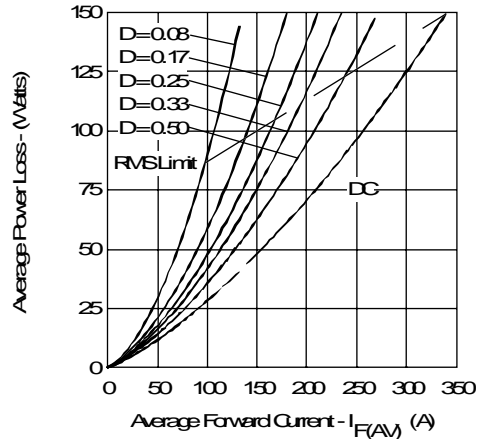


Fig. 6 - Forward Power Loss Characteristics

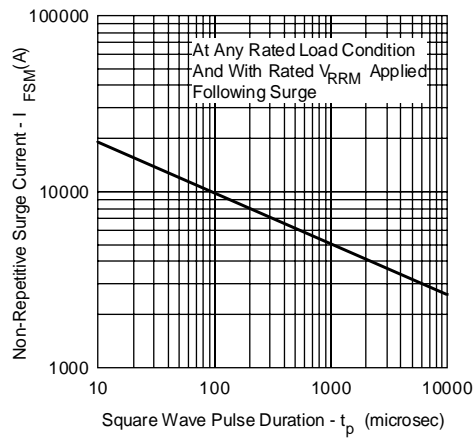


Fig. 7 - Maximum Non-Repetitive Surge Current

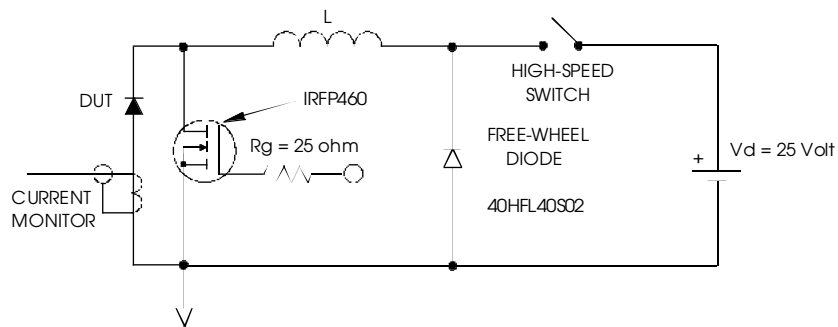


Fig. 8 - Unclamped Inductive Test Circuit