
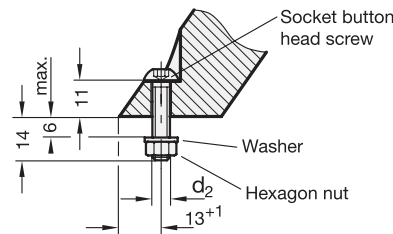


Type A

Type B



3 Type

- A** Mounting from the back (tapped blind hole)
- B** Mounting from the operator's side (only for b1=26)

Metric table

Dimensions in: millimeters - inches

1 b ₁	2 Length l ±0.25	a	b ₂	b ₃	b ₄	b ₅ +1	d ₁ Type A	d ₂ Type B	h ₁	h ₂	r	t min.
20 .79	112 4.41	13 .51	24 .94	32 1.26	50 1.97	13.5 .53	M 6	-	32 1.26	48 1.89	13 .51	10 .39
20 .79	128 5.04	13 .51	24 .94	32 1.26	50 1.97	13.5 .53	M 6	-	32 1.26	48 1.89	13 .51	10 .39
26 1.02	128 5.04	17 .67	32 1.26	34 1.34	57 2.24	18 .71	M 8	M 6	34 1.34	54 2.13	17 .67	12 .47
26 1.02	160 6.30	17 .67	32 1.26	34 1.34	57 2.24	18 .71	M 8	M 6	34 1.34	54 2.13	17 .67	12 .47

Specification

- Aluminum
 - Powder coated
 - Black, RAL 9005, textured finish
 - Silver, RAL 9006, textured finish
 - Anodized finish, natural color
 - Blank, tumbled finish
 - Type B
 - Socket button head screws ISO 7380-M6-25
 - Hexagon nuts ISO 4032-M6
 - Washers DIN 125
- Steel, zinc plated, blue passivated finish
- **RoHS compliant**



Information

GN 565.2 angled cabinet “U” handles are manufactured from a bent aluminum profile and have excellent stability and ergonomic design. The 35° angled contact surface allows improved access even in tight spaces such as corners.

The manufacturing process allows the production of special lengths in relatively small quantities.

For type B, socket button head screws, hexagon nuts and washers are included.

see also...

- Cabinet “U” Handles GN 425.1 (Offset)
- Cabinet “U” Handles GN 426.1 (Offset Round Aluminum)
- Ergostyle® Off-Set Open “U” Handles EN 630.1 (Technopolymer Plastic)
- T-Nut Assemblies GN 965 (for 30 / 40 mm T-Slot Profile Systems)
- T-Nut Assemblies GN 968 (for 30 / 40 / 45 mm T-Slot Profile Systems)

On request

- Special lengths

How to order

GN 565.2-26-128-B-SW

- 1** Handle width b₁
- 2** Length l
- 3** Type
- 4** Finish