


P	LTR	DESCRIPTION	DATE	DWN	APVD
AC2		REVISED PER ECR-23-168072	29MAY2023	RK	JMV

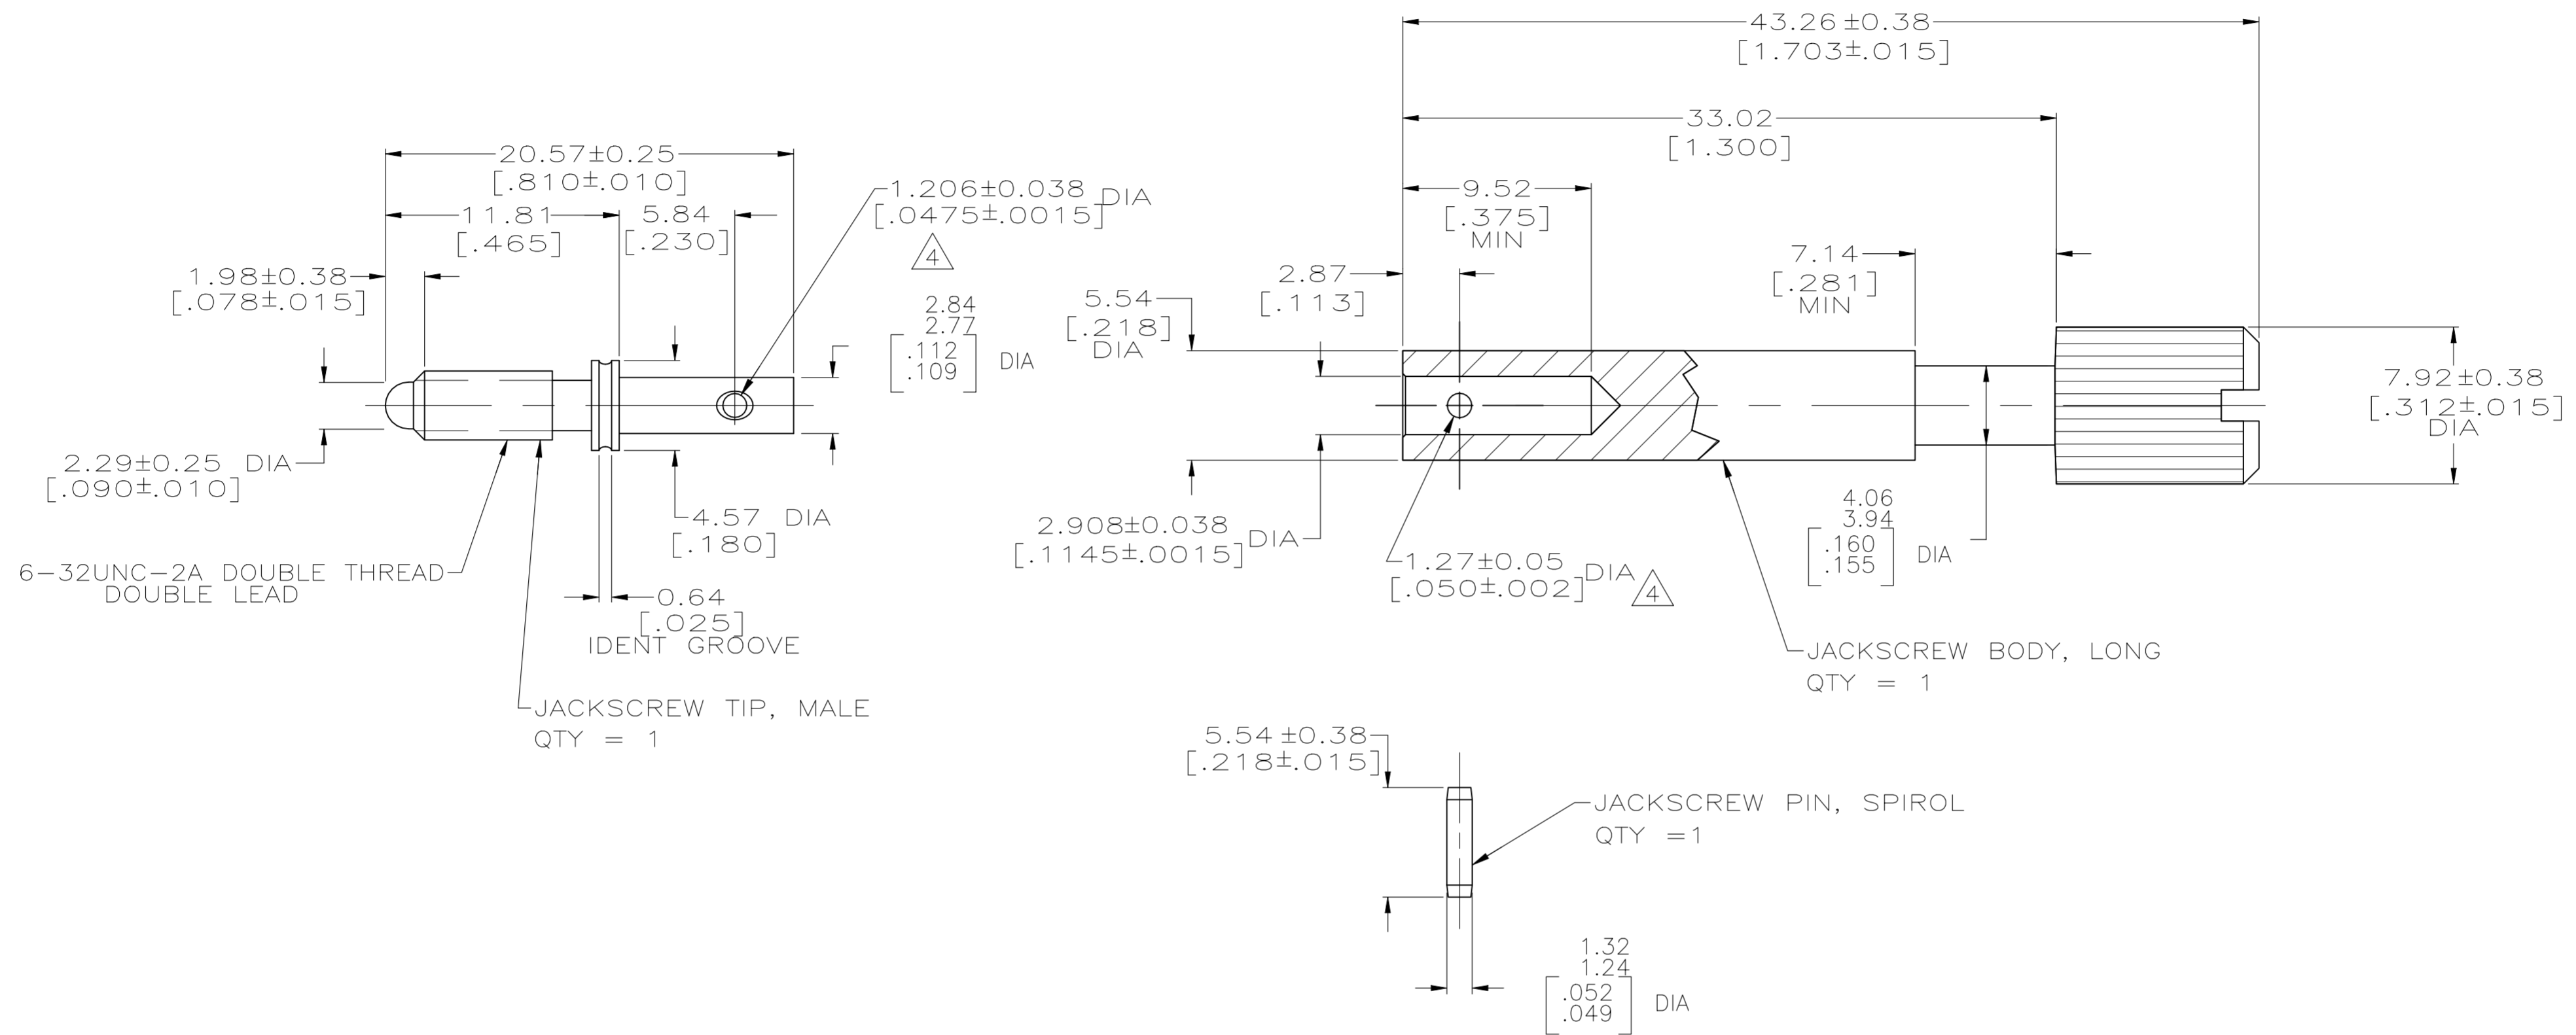

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ± 0.07 [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

6	1-200871-0
6	200871-1
NOTES	PART NUMBER

SUPERCEDED BY 1-200871-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/23/94
DIMENSIONS:		CHK	R.STONE	06/16/94
mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	-	-
	0 PLC ± -	PRODUCT SPEC	-	NAME
	1 PLC ± -	APPLICATION SPEC	-	JACKSCREW KIT, UNASSEMBLED, MALE, M SERIES
	2 PLC ± 0.13 [.005]	WEIGHT	-	SIZE
	3 PLC ± -	CUSTOMER DRAWING	-	CAGE CODE
	4 PLC ± -	SCALE	4:1	DRAWING NO
	ANGLES ± -	SHEET	1 OF 1	REV
MATERIAL	FINISH	WEIGHT	A2	00779
JACKSCREW BODY: 1	JACKSCREW BODY: 2	REVISIONS	C=200871	REV
JACKSCREW TIP: 3	JACKSCREW PIN: PASSIVATED	SCALE	4:1	REV
JACKSCREW PIN: 4		SHEET	1 OF 1	AC2