
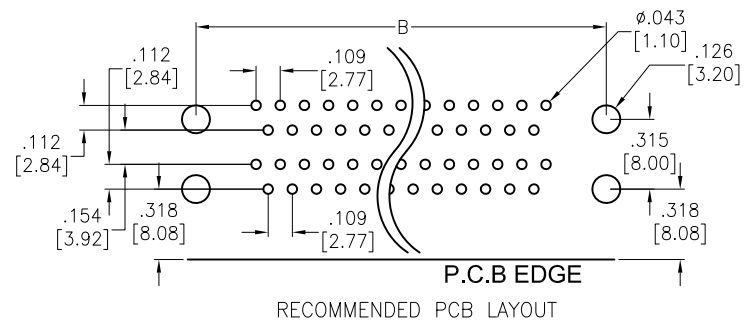


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	
A		REDRAWN	10/16/14	AY/NP

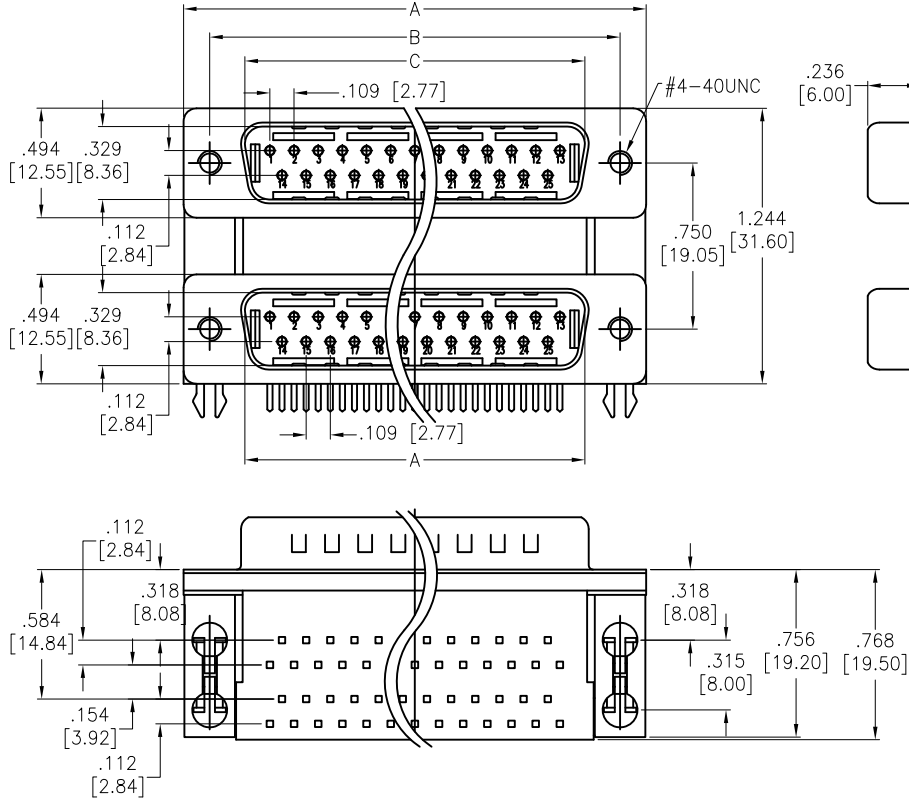

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Copper Alloy  
 Shell: SPCC, Nickel plated  
 Boardlock: Copper Alloy, Tin plated  
 Bracket: Zinc Alloy, Nickel plated  
 Plating:  
 Gold plated over Nickel at Contact Area,  
 Tin Plated over Nickel at Solder Area.  
 Electrical:  
 Voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Contact resistance: 25 mohms max  
 Insulation resistance: 5000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -55°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



POSITIONS	Dimensions		
	A	B	C
9	1.213 [30.81]	.984 [24.99]	.666 [16.92]
15	1.543 [39.19]	1.312 [33.32]	.971 [24.66]
25	2.088 [53.04]	1.852 [47.04]	1.534 [38.96]
37	2.729 [69.32]	2.500 [63.50]	2.182 [55.42]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES HOLES		
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	SS	11/22/04
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, RIGHT ANGLE  
 MALE / MALE, XX POSITION, .750" PORT

SIZE X	PART NO. DPD-XX-11-B3	REV. A
REF: S00027T	SCALE: NTS	SHEET 1 OF 1