
т	۵	н п	m	0





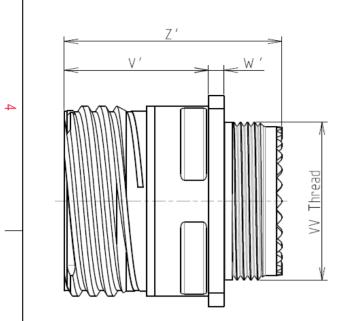

Keying Shown as example

CHARACTERISTICS

-Salt Spray

ယ


 \sim


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	_∶ -65°C to +175°C				

: 2000 hours

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M12x1-6g		

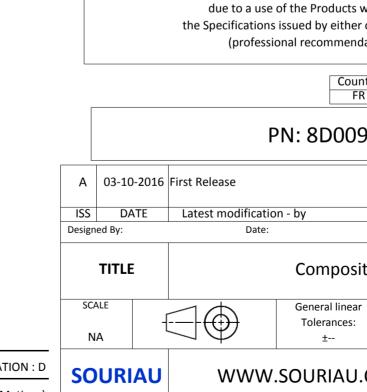

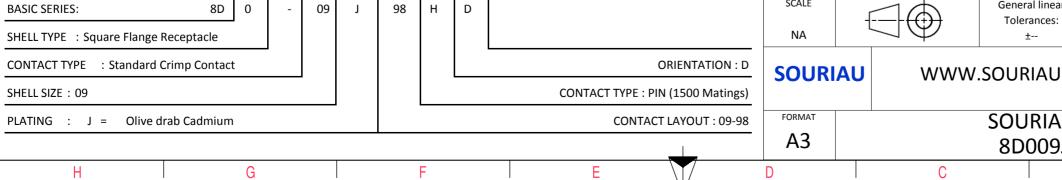

0		Φ		A		
						4
LAYOUT SHOWN AS EXAMPLE						3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)						2
PN: 8D009J98HD						
rst Release Latest modification - by MOD N°						
Date:			CUSTO	MER DRAWING		
Composite Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±			DS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
SOURIAU DRG N° SHEET 8D009J98HD-C 1/2						
С		B		A		J

r	Ŧ	G	г П	m		0
		Contact Layout				Panel Cutor
4	-X				Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numb size no. conta 9 -98 3	n X-avis (mm) (mm) +065 (1.65) +0.38 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of Size Service Contact Supersedes acts contacts rating location				ØT
ω						Dim ØA ØAA R1 ØT
	-				[
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
N						PN: 8D009J
					A 03-10-20	16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Composite
_					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D009J9
	Н	G	F	E	D	C

