




Material
Terminal body(Contact pin):Brass
Wire guard: Stainless steel
Surface of solder tail: Tin plated
Insulator(housing): Thermoplastic (UL94V-0), GREEN(RAL6018/T)

Electrical cULus/VDE

Voltage rating: 300VAC/250VAC
Current rating: 10A/10A
Wire range:0.75-1.5mm²
Solid wire(AWG): 14-24
Stranded wire(AWG): 14-24
Wire strip length: 9-10mm
Withstanding Voltage: 1.6KV/2KV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval: cULus  

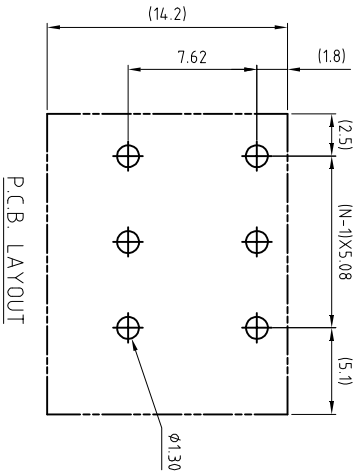

Poles	Tolerance	
	DIM L	DIM P
2p-6p	±0.20	±0.20
7p-12p	±0.25	±0.25
13p-24p	±0.40	±0.40

RoHS compliant
Unit: mm



Scale	Free TOLERANCE	Id.	Modification	Date	Name
X.	±0.50	①	Drawn	10.12.2009	Dean
X.X	±0.30	②	Update	17.04.2013	Amy
X.XX	±0.10	③	Add UL File No.	15.03.2016	Winnie
DIM	TOL				
X.°	±1°				
Angle	TOL				

Customer-No.

ASSMANN WSW-No.

A-TB508-HAXXH

Drawing-No.

ASS 3894 CO rev03



Replace

1 2 3 4 5 6 7

A B C D E F G H