


SUGGESTED MOUNTING HOLE PATTERN
FOR 4.5 X 15mm FUSE (2AG)
SCALE = 4:1

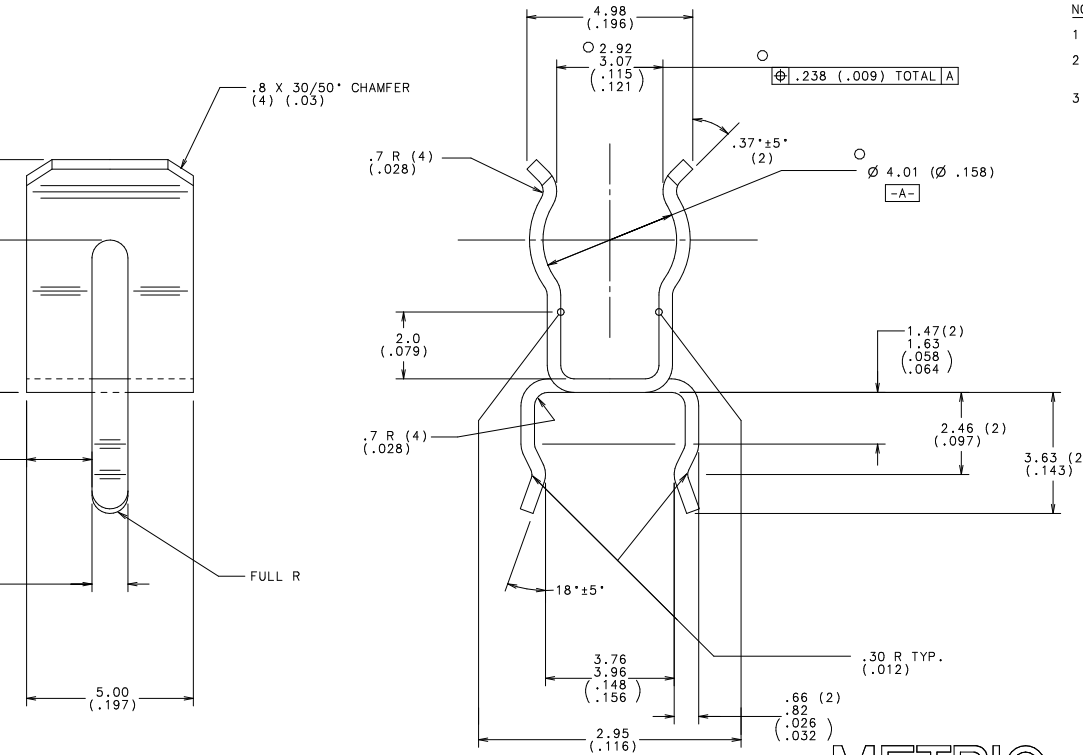

NOTES:

1. DECIMAL EQUIVALENT = (.XXX)
2. TOOLING MUST ALSO BE CAPABLE OF PRODUCING PART No. 01110501Z.
3. HEAT TREAT 600°F FOR 2 HOURS.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
2	010113	HIGH PURITY TIN	.015	LB
1	046184	BeCu .41(.016) THICK	.858	LB

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

COPIES TO		MATERIAL SPEC		FINISH		TIN PLATE		PER L / SRK		ES-001002-B	
1	9 18										
2	10 19										
3	12 20										
4	13 21	DRW	PJM	DATE	05/26/00	SCALE					10:1
5	14 23	CHK		DATE		SUPER-DR					
6	15 33										
7	16 43	TPPS		DATE		RAB STR WT					LBS/M
8	17 53										

TWO PLATE DEP $\pm .25$
THREE PLATE DEP $\pm .40$
TOLERANCE UNLESS OTHERWISE SPECIFIED FRACTION \pm ANGULAR $\pm 1^\circ$