
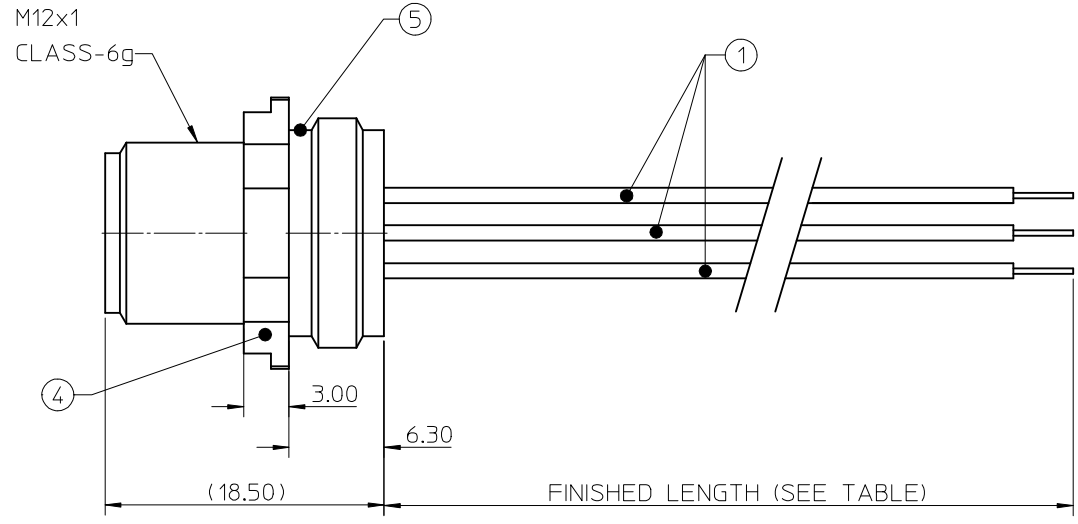


10 9 8 7 6 5 4 3 2 1

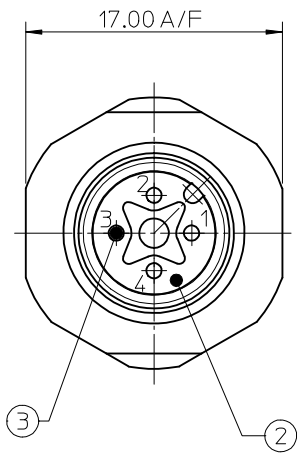


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200705202	8R3J26E03C3003	0.3M±10-0[0.98' + 1.75' -0]
4	1200110019	8R4J26E03C3003	0.3M±10-0[0.98' + 1.75' -0]
5	1200110036	8R5J26E03C3003	0.3M±10-0[0.98' + 1.75' -0]

CONNECTOR SPECIFICATION

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP68
OPERATING TEMPERATURE	-20°C TO +80°C
ASSEMBLY IS RoHS COMPLIANT	

MALE FACE VIEW

3 WIRE		4 WIRE		5 WIRE	
Pin No.	Wire	Pin No.	Wire	Pin No.	Wire
1	Brown	1	Brown	1	Brown
2	----	2	White	2	White
3	Blue	3	Blue	3	Blue
4	Black	4	Black	4	Black
				5	G/Y



ITEM	COMPONENT	MATERIAL	FINISH
1	WIRE 0.34 3/4/5 CONDUCT. 300V	PVC	-
2	INSERT	NYLON 6/6	-
3	CONTACT	F.C.BRASS ASTM B16	GOLD OVER NICKEL
4	RECEPTACLE SHELLS	BRASS	NICKEL PLATED
5	O-RING	VITON	BLACK

ORIGINAL RELEASE EC NO: IPG2017-0804 DRW:RSILLER 2017/07/24 CHK:DRSILLER 2017/07/24 APPR:BBRAUCH 2017/07/24	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0 ▽=0	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± 0.1 ± --- ANGULAR ± 2 °	MM ONLY	3:1	METRIC	REC M12 XP AC MA STR PVC 0.3M PG9 FM SE UNSH
	DRAWN BY: LSG CHECKED BY: CBURGER APPROVED BY: CBURGER	DATE: 2011/09/13 DATE: 2013/04/26 DATE: 2013/04/26	TITLE			MOLEX INCORPORATED SD-120070-012
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	MATERIAL NO. DOCUMENT NO.			SHEET NO. 1 OF 1

9 8 7 6 5 4 3 2 1