



AC Cloud Control

INWFIDAI001R1XX

Wi-Fi interface for Daikin SKY & VRV series

1. Dimensions

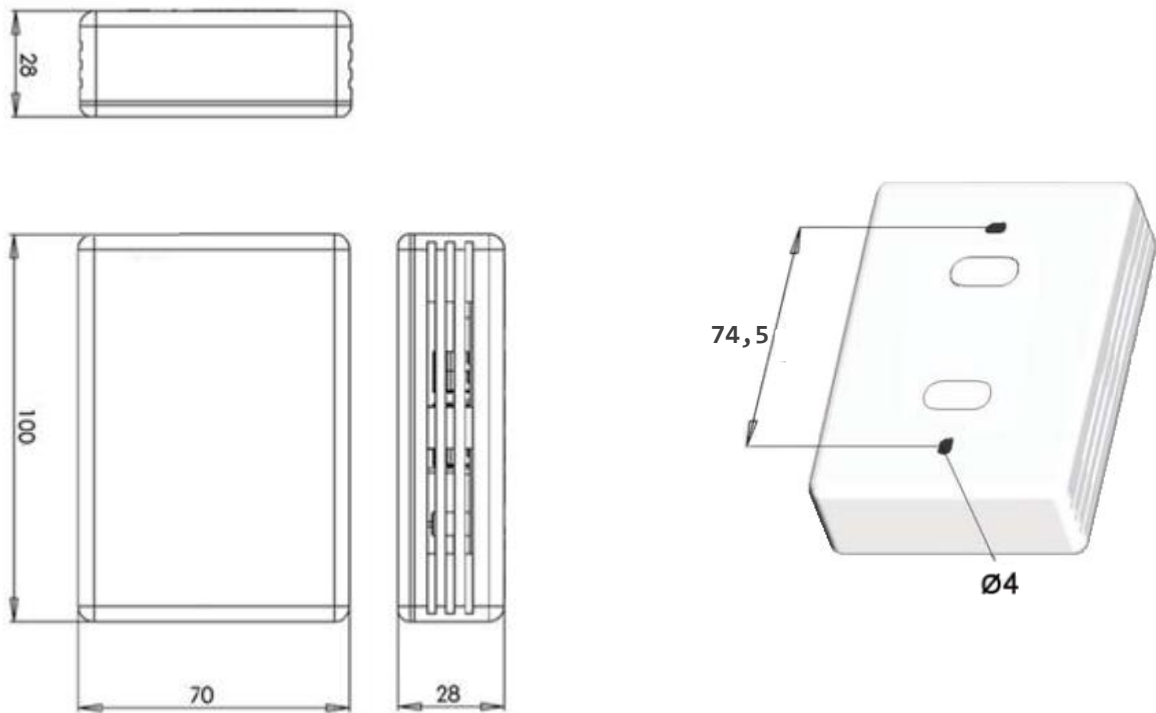


Figure 1.1 AC Cloud Control device dimensions in mm and back view with fixing holes

2. Technical Features

| | |
|---|---|
| Enclosure | ABS (UL 94 V-0). 2,5 mm thickness |
| Dimensions | 70 x 100 x 28 mm |
| Weight | 98 g |
| Dimensions (including packaging) | 133 x 135 x 35 mm |
| Weight (including packaging) | 166 g |
| Colour | White |
| AC Connector | 12V, 85mA typical |
| Radio Parameters | Wi-Fi 802.11 (b/g/n) RF Frequency band: 2.4 GHz. <i>Consult annex 1 for further information</i> Output power (average): 8 dBm (<i>Modulated signal at antenna chip; 11Mb/Sec.</i>) Bluetooth v4.2 BR/EDR and BLE specification |
| Mounting | Wall |
| LED indicators | 1 x Device status |
| Operating Temperature | From 0°C to 40°C |
| Operating humidity | 5% to 95% HR, no condensation |
| Stock humidity | <93% HR, no condensation |
| Certifications | CE conformity to EMC directive (2014/53/EU). <ul style="list-style-type: none"> • EN 62368-1:2014 + A11:2020 • AS/NZS 62368.1:2018 • ETSI EN 300 328 V2.2.2 • ETSI EN 303 446-1 V1.2.1 • ETSI EN 301 489-17 V3.2.4 • ETSI EN 301 489-1 V2.2.3 • ETSI EN 301 446-1 V1.2.1 • EN 55032:2015 + AC:2016 + A11:2020 • EN 55035:2017 + A11:2020 • Regulations: FCC/IC Standards: Title 47 CFR Part 15B ICES-003 (Issue 7) |

Table 2.1 Technical features

Annex 1

The device can be configured in 3 different RF Modes:

- USA: 2412 – 2462 MHz (11 channels)
- Europe: 2412 – 2472 MHz (13 channels)
- Japan: 2412 – 2484 MHz (14 channels)

The factory settings are set to work in the most restrictive mode, USA: 2412 – 2462 MHz. Therefore, if the user doesn't change any of these parameters, the gateway is compliant with the most restrictive RF regulations, stricter than European's.