
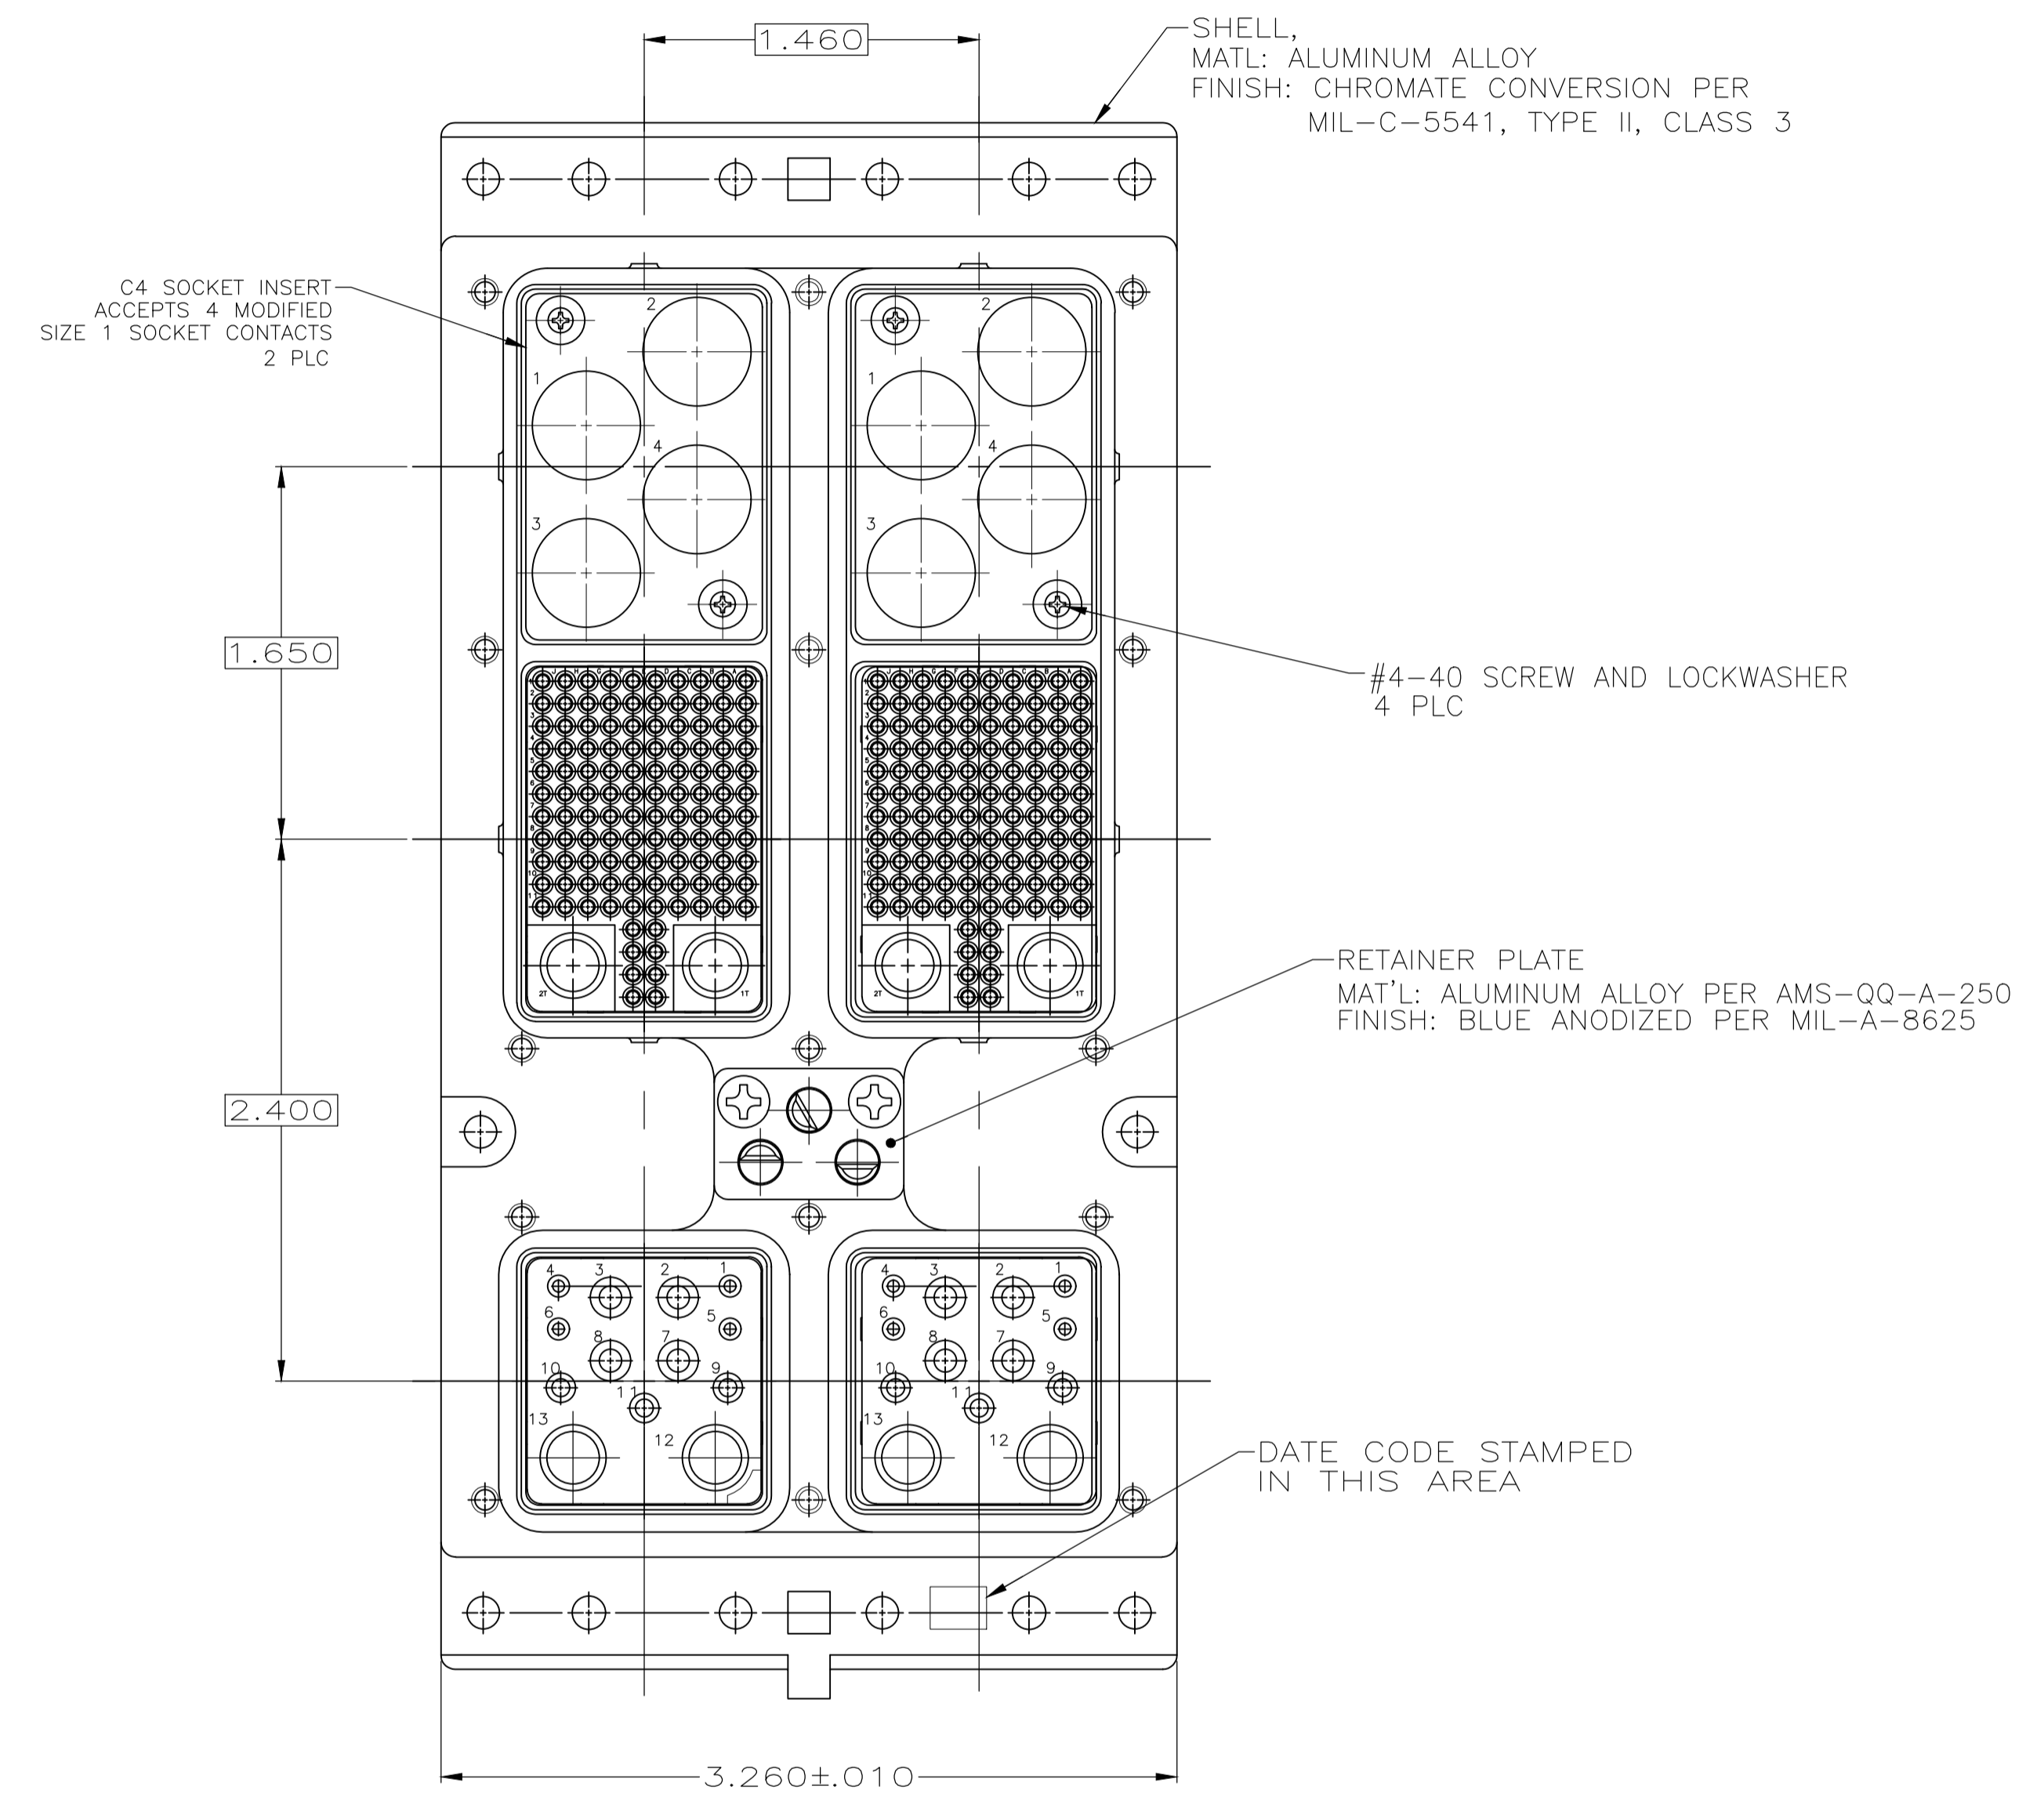


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
E		REVISED PER ECO-17-018523	19JAN2018	PHM	CT

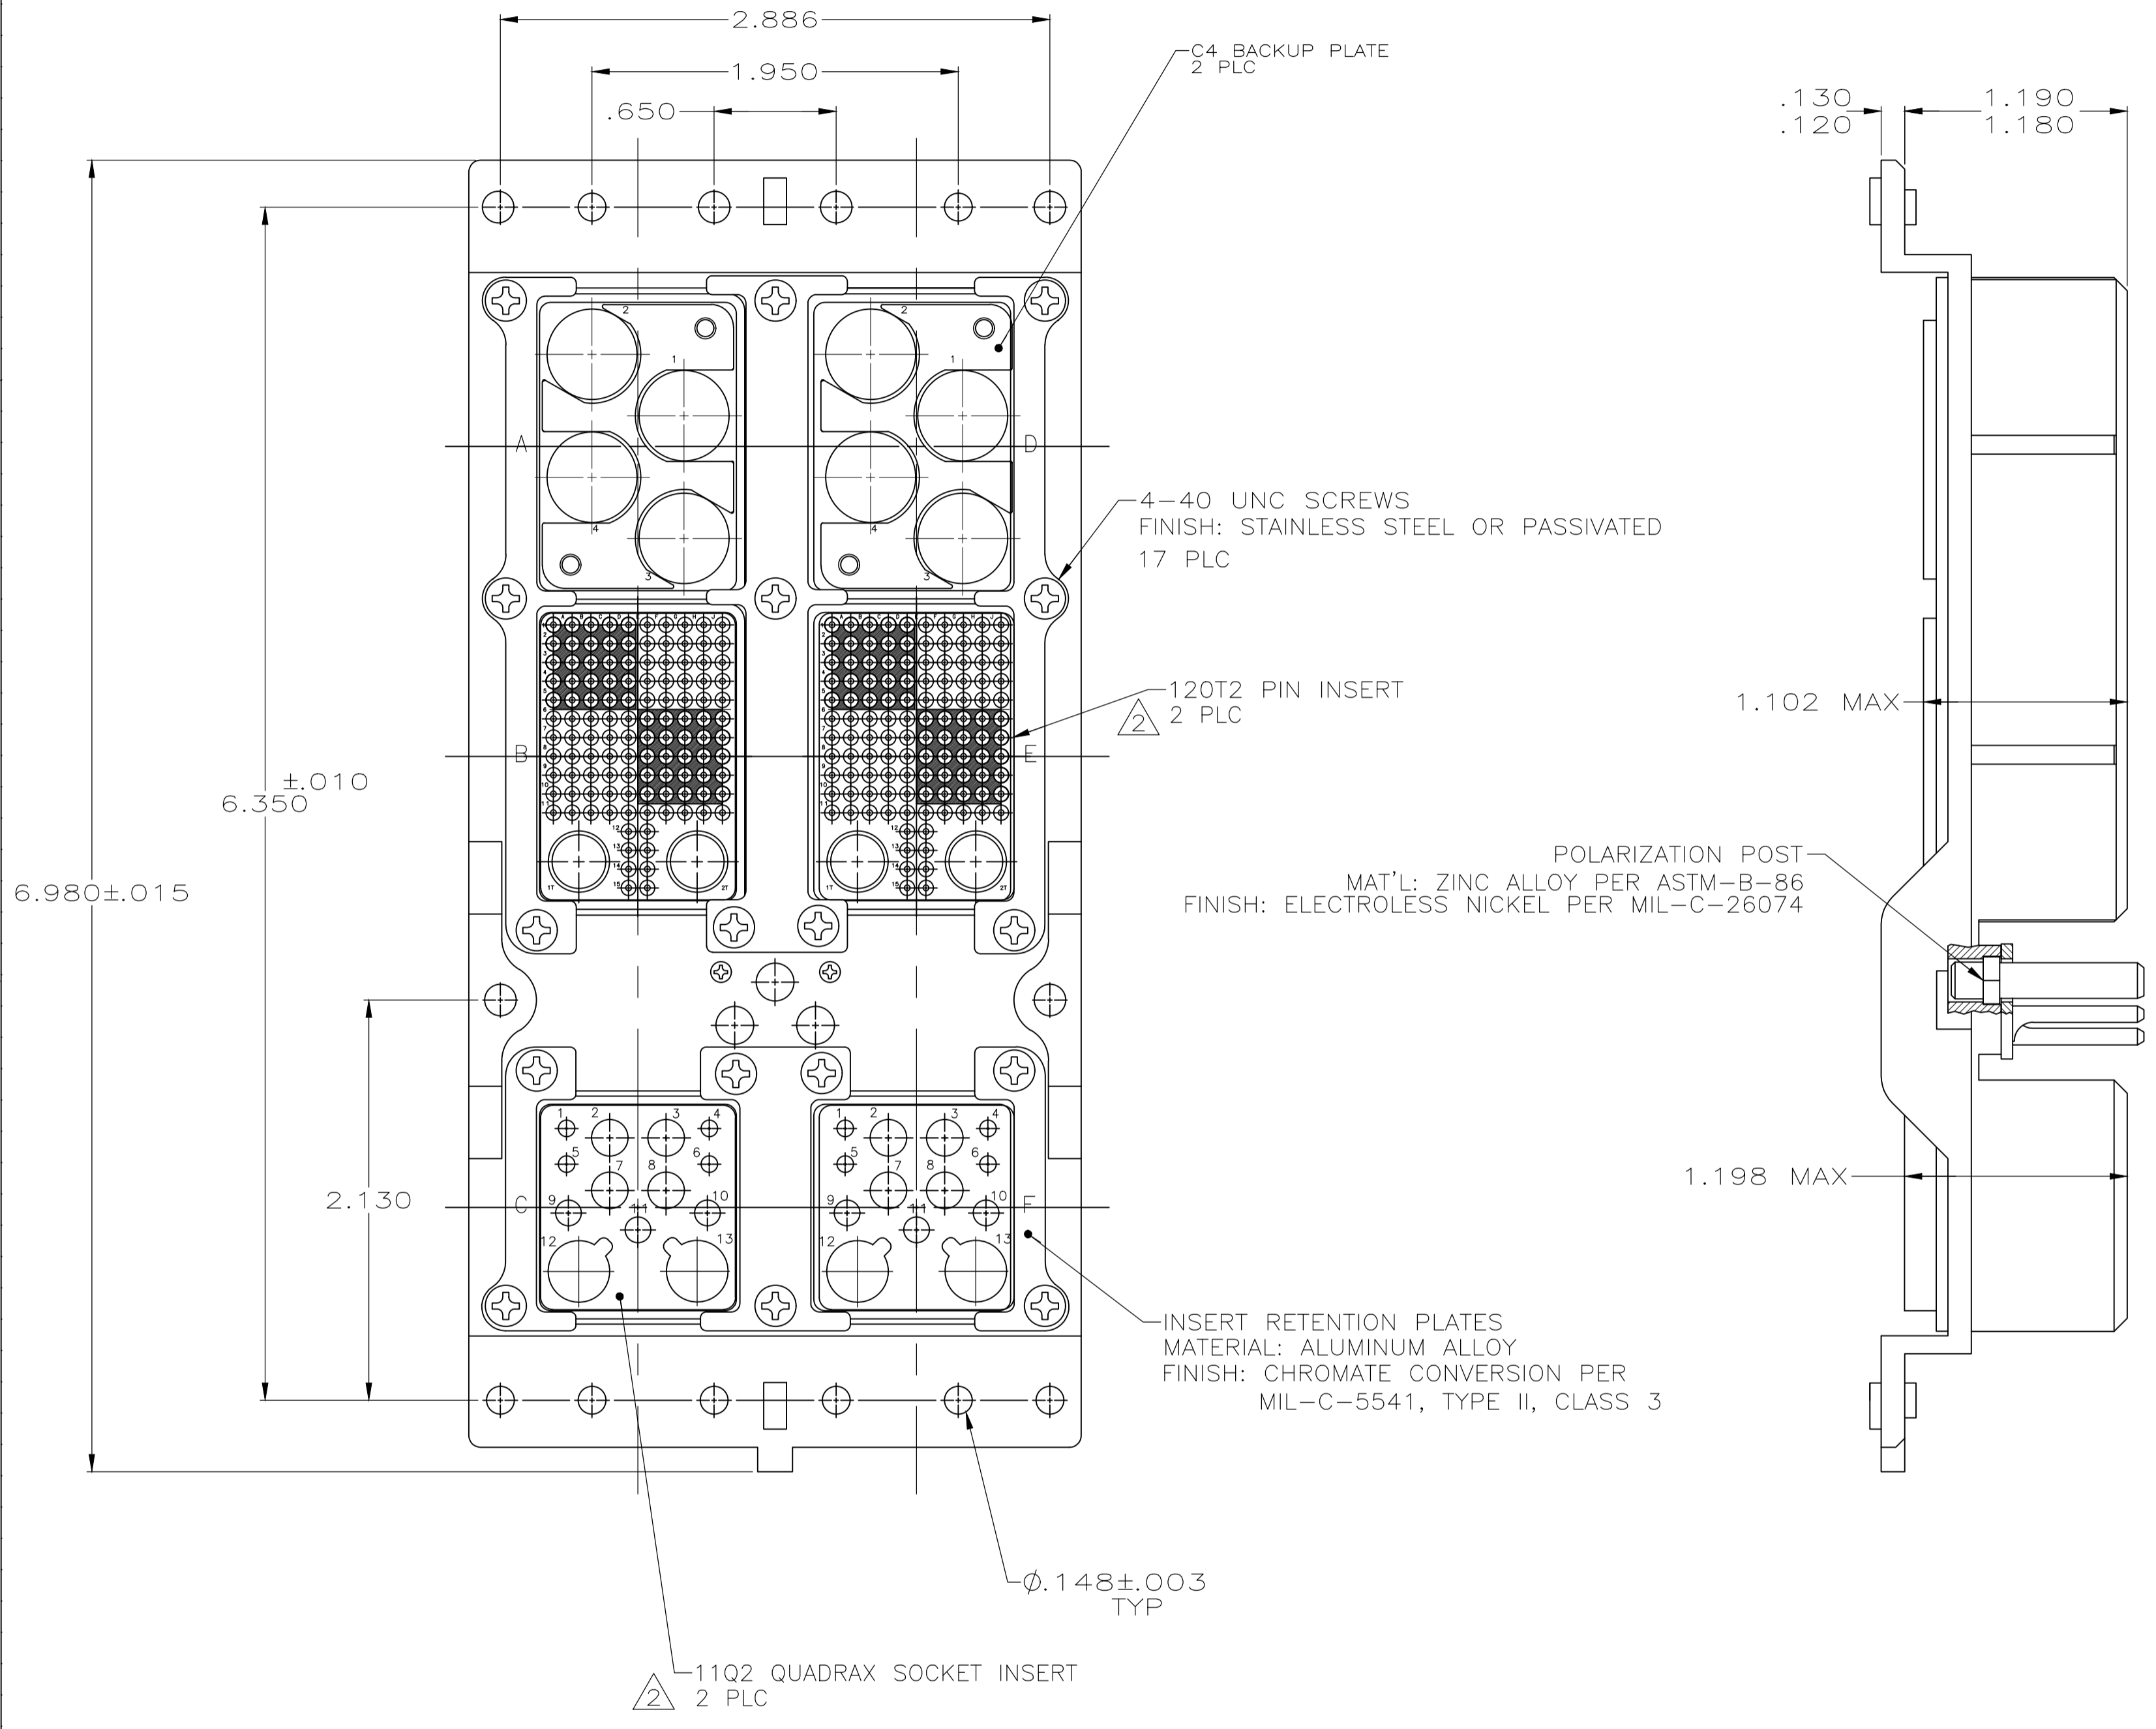

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- INSERT MATERIAL: THERMOSET
- KEYING SHOWN IN POSITION "163", CONNECTOR SUPPLIED WITH KEYING IN POSITION PER TABLE. FOR POSITION "00", KEYING HARDWARE IS SUPPLIED UNASSEMBLED.

163	MODULE A & D 446549-5 (MOD. SIZE 1 COAX SOCKET RG393) MODULE B & E 208262-3 (SZ 22 PIN CONTACT; QTY=236) 1218821-1 (SZ 8 COAX SOCKET; QTY=4) MODULE C & F 208267-2 (SZ 20 SOCKET CONTACT; QTY=8) 208270-2 (SZ 16 SOCKET CONTACT; QTY=6) 208273-2 (SZ 12 SOCKET CONTACT; QTY=8) 1445693-1 (SZ 8 SOCKET CONTACT; QTY=4)	1663467-1
	KEYING POSITION	CONTACTS INCLUDED WITH CONNECTOR NOT INSTALLED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN C.C.THOMAS 5-1-03	TE Connectivity Ltd.	
DIMENSIONS: INCHES		CHK S.GLATFELTER 5-1-03	NAME S.GLATFELTER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.GLATFELTER 5-1-03	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE		
2 PLC ± -		CAGE CODE		
3 PLC ± .005		DRAWING NO		
4 PLC ± -		WEIGHT		
ANGLES ± -		A1 00779 C=1663467		
FINISH		CUSTOMER DRAWING		
SEE CALLOUTS		SCALE 1.5:1 SHEET 1 OF 1 REV E		