

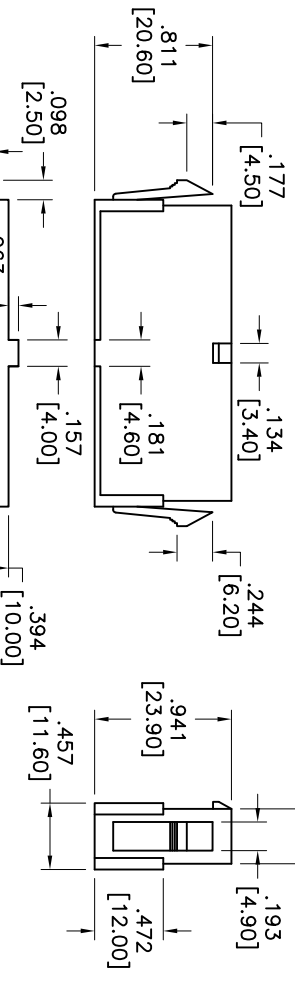


APPROVED: _____
 DATE: _____ TITLE: _____

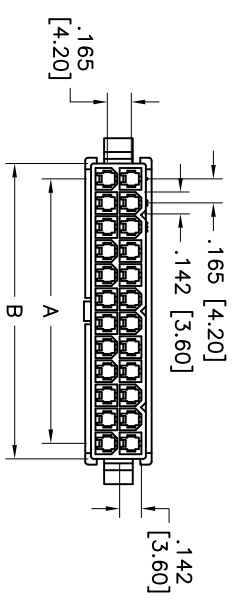

Mounting Hole Details

Wire Size AWG	Positions			
	2	4, 6	8, 10	12~24
#18	9A	8A	7A	6A
#20	7A	6A	5A	5A
#22	5A	4A	4A	4A
#24	4A	3A	3A	3A

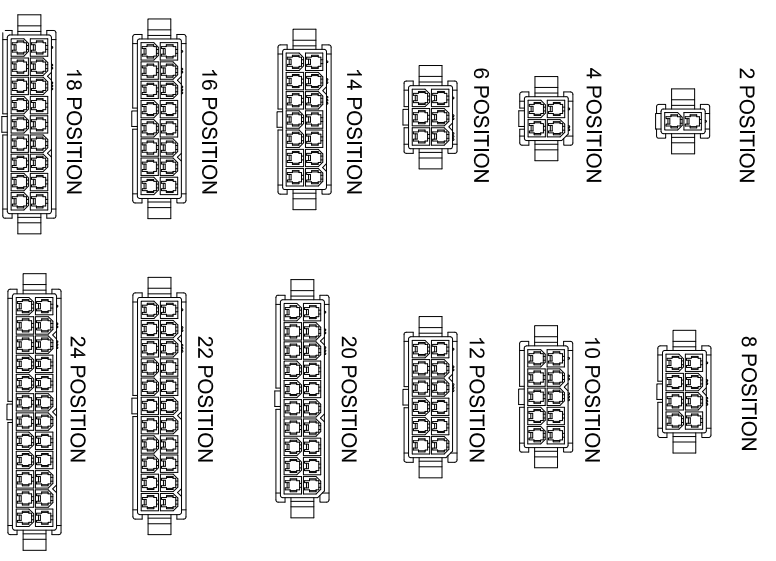

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural
Electrical:
 Operating voltage: 600 VAC max
 Current rating: See chart
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
Mechanical:
 Wire size: 18 Awg thru 24 Awg
 Temperature Rating: -40°C to 105°C
Environmental:
 Operating temperature: -40°C to 105°C
 Lead free, RoHS compliant.



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/23/08	
A		ADDED DIM.	9/9/14	AY/MW

Positions: 2 thru 24
 A = .165 [4.20] X No. of Spaces per row
 B = .165 [4.20] X No. of Positions per row + .047 [1.20]
 C = .165 [4.20] X No. of Positions per row + .063 [1.60]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

PLUG HOUSING, DUAL ROW, .165 [4.20] PITCH

DRAWN	CHECKED	APPROVED	DATE	SIZE	PART NO.	SCALE	SHEET
DY			9/23/08	X	DMF-XX-W	NIS	1 OF 1