

1 2 3 4 5 6 7

A

A

B

B

C

C

D

D

E

E

F




F

G

G


H

H

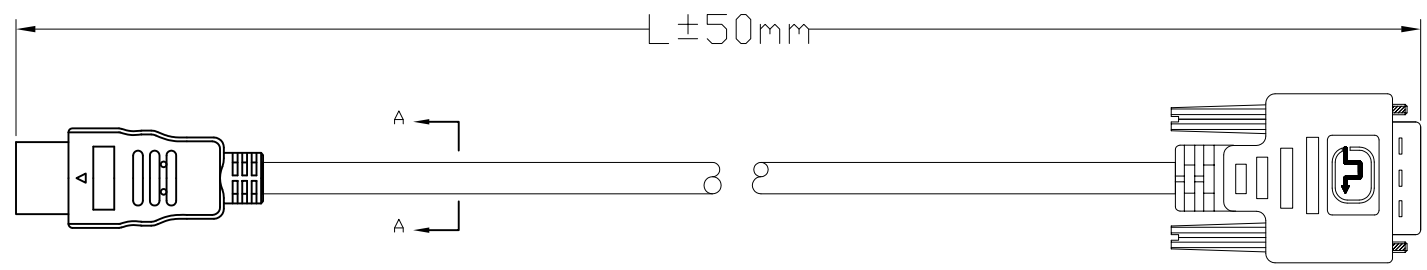

NOTE:

- 1.CABLE:UL20276 (28AWG*1PD+AL/MY)*4C+28AWG*1P +30AWG*3C+AL/MY +D+B+ PVC JACKET;OD:6.6±0.2mm COLOR:BLACK .
- 2.CONNECTOR:
 P1:HDMI 19P MALE CONTACT GOLD PLATED ,SHELL GOLD PLATED .
 P2:DVI_D 18P+KEY MALE CONTACT GOLD PLATED ,SHELL GOLD PLATED .
- 3.HOOD:P1&P2: MOLDED TYPE,PVC 45P,COLOR:BLACK .
- 4.TEST REQUEST:
 (1) 100% OPEN SHORT & MIS WIRE TEST .
 (2) CONTACT RESISTANCE 5 OHM Max .
 (3) INSULATION RESISTANCE 10M OHM Min .
- 5.PACKING:EACH PC / POLYBAG + LABEL .

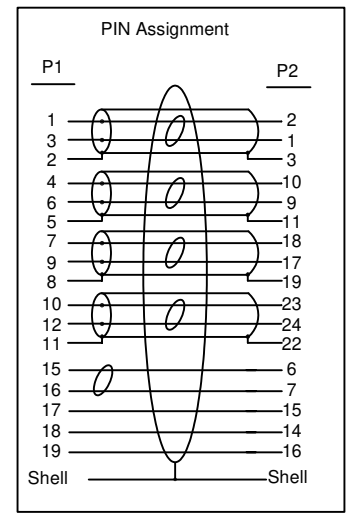

ASSMANN WSW P/N	LENGTH
AK-330300-020-S	2.0 M
AK-330300-030-S	3.0 M
AK-330300-050-S	5.0 M
AK-330300-100-S	10.0 M

RoHS compliant
Unit:mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	02.07.2009	Rale
X.	±X				Approved	18.06.2014	Joanna
X.X	±X						
X.XX	±X						
DIM	TOL	②	Update drawing	18.06.2014	Joanna	ASSMANN WSW-No. AK-330300-xxx-S	
X.°	±X°	①	Drawn	02.07.2009	Rale	Drawing-No.	ASS 3629 CA
X.X°	±X°					Replace	rev02
Angle	TOL	Id.	Modification	Date	Name		Sheet



1 2 3 4 5 6 7