


PROPRIETARY INFORMATION:  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.27619, HM	03/19/21	MK

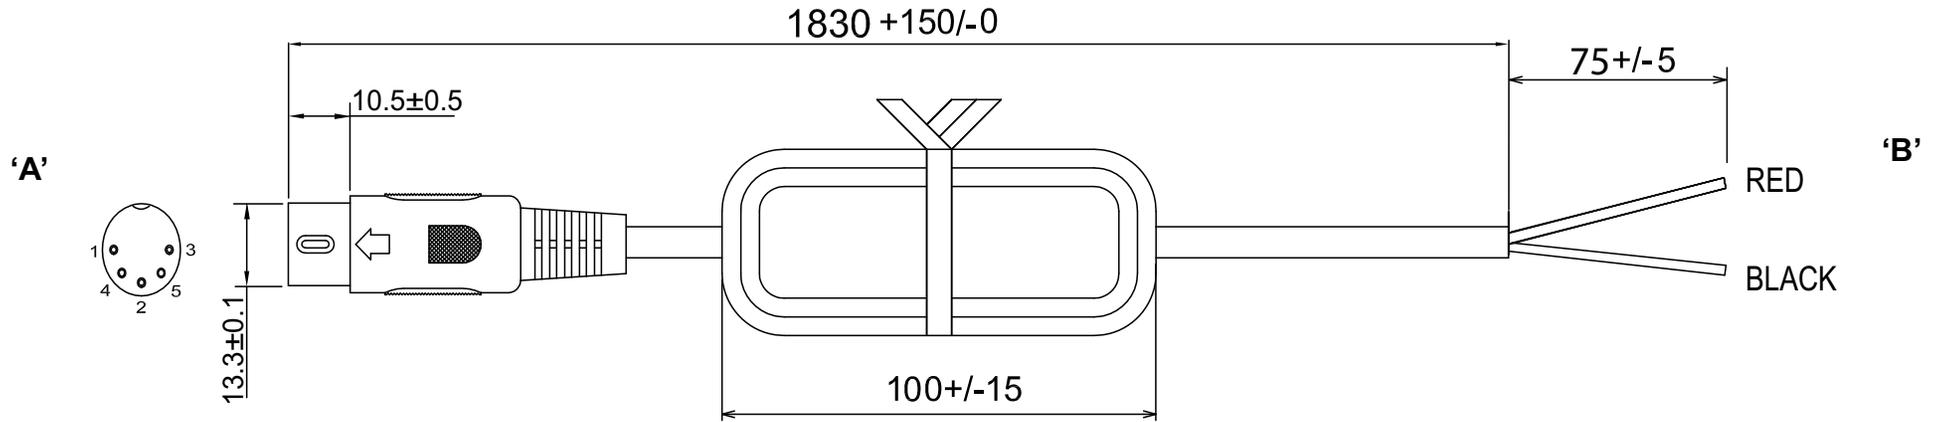

PIN 1(Red): (+)  
 PIN 5(Black): (-)  
 PIN 2,3,4: N/C

**GENERAL SPECIFICATIONS:**

CABLE TYPE / SIZE: UL2464, 22 AWGx2C, ROUND, PVC JACKET, 300V RATED  
 TEMPERATURE RATING: 60°C MIN.  
 CONDUCTOR COLORS: RED / BLACK  
 OVERALL LENGTH (L): 1830+150,-0 mm  
 END 'A' TERMINATION: 5 PIN MALE DIN PLUG  
 END 'B' TERMINATION: NO STRAIN RELIEF, REMOVE OUTER JACKET  
 APPROVALS CABLE: UL, CSA or cUL

**NOTES:**

1. CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
TOLERANCES: DECIMALS .xx +/- 0.1 .xxx +/- .005 MILLIMETERS .xx +/- 0.3 .xxx +/- .013		ANGULAR +/- 1°		 <b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
INIT.BY: HM	DATE: 03/19/21	ANGULAR +/- 1°		
DRAWN: NF	DATE: 03/19/21	FSCN No.: G, CC, YL	SIZE A	DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET
APRVD: MK	DATE: 03/19/21	SCALE: NONE	MODEL: N / A	REV. A
PART NO: N052X226F000			SHEET 1/1	

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice