

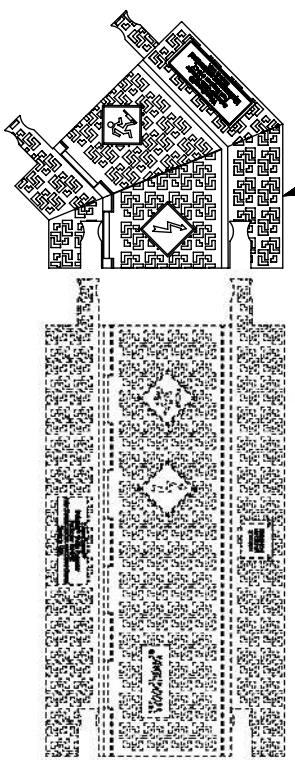


PART NUMBER	Woodhead® ENGINEERING NUMBER	LID COLOR
1301380118	610-LT	SAFETY ORANGE (PER ANSI Z535.1-2006)
1301380188	610-LT-BLK	BLACK

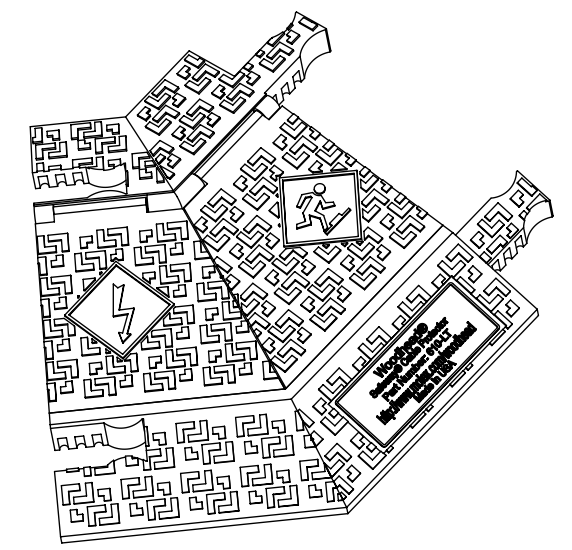


**Left Turn:**  
 Each left turn piece allows a 45° change in direction of the cable run. Turn pieces connect directly to the end of the cable protectors. Multiple left turns may be used in combination to produce a 90° or greater change in direction of the cable run.

SAFETY WARNING SYMBOLS  
 (PER ANSI Z535.3-2011)

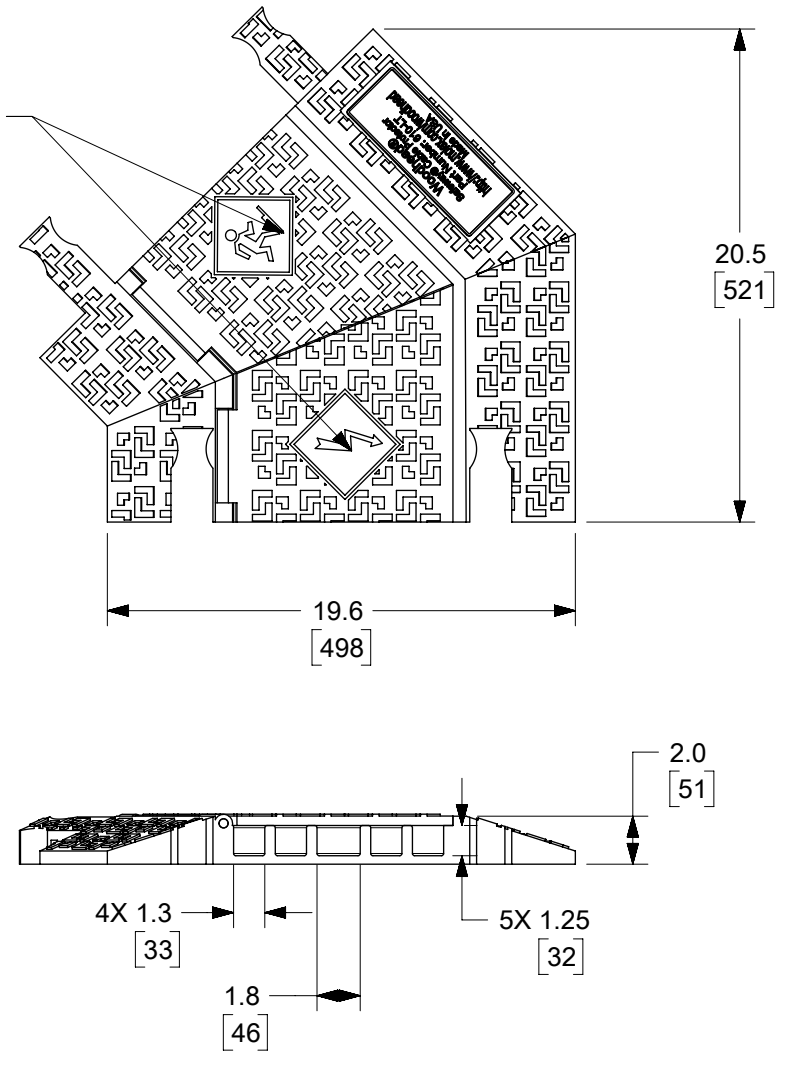

ISOMETRIC VIEWS

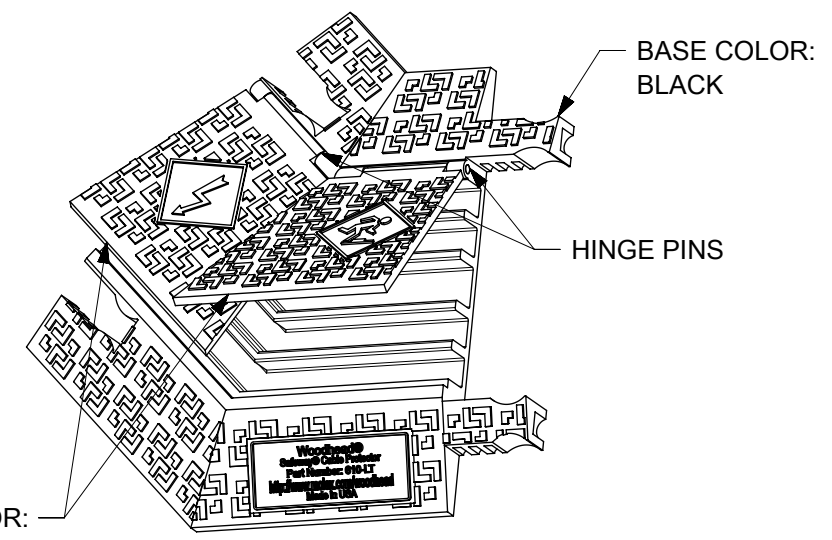

LID COLOR:  
 SEE CHART

**NOTES:**

- 1) MATERIAL:  
 BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED  
 HINGE PIN: REINFORCED FIBERGLASS
- 2) WEIGHT: 15.5 LBS/ 7 KG ±10%
- 3) LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
- 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
- 5) ENGINEERING NO.: SEE CHART
- 6) ROHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS	SCALE	CURRENT REV DESC: UPDATE NOTE 2							
INCH	1:8	<p>5 CHANNEL 45° LEFT TURN          SAFEWAY® CABLE PROTECTOR</p> <p>PRODUCT CUSTOMER DRAWING</p>							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL	± 3.0°								
4 PLACES	± 0.25								
3 PLACES	± 0.25								
2 PLACES	± 0.25	EC NO: 174322	2018/03/26	DOCUMENT NUMBER					
1 PLACE	± 0.25	DRWN: WLEUNG	2018/04/02	1301380118					
0 PLACES	± 0.25	CHK'D: DNGUYEN62	2018/04/03	PSD 000 D					
INITIAL REVISION:		APPR: BRUPERT	2016/04/18	REVISION					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWN: WLEUNG	2016/04/28	MATERIAL NUMBER					
THIRD ANGLE PROJECTION		APPR: BWOODMAN	2016/04/28	CUSTOMER					
DRAWING		SERIES		SHEET NUMBER		1 OF 1			
B-SIZE		130138		SEE CHART					

DOCUMENT STATUS	P1	RELEASE DATE	2018/04/03	13:37:49
-----------------	----	--------------	------------	----------