
т	۵	н т	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
2	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 11.8 g ± 10%			

8D 0

G

11

Μ

02

S

F

Ν

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
/V THREAD	M15x1-6g


ORIENTATION : N

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

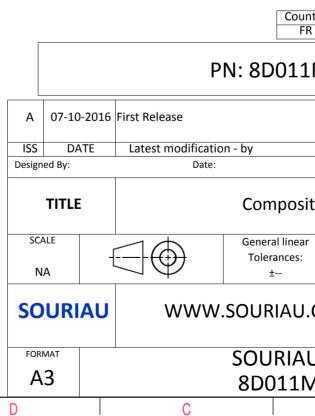

	Ξ		А			
	2					
(I)		2			4	
	- CE					
-		JA.				
	0					
	1.5					
	-				3	
S EXA	AMPLE					
· any i	non-conformit	y or damage	!			
s whic	ch does not co he Parties or b	mply with				
	on, technical n		-			
untry FR	/ Jurisdiction & Control List Not Listed					
τivi	02SN					
		CUSTOME	R DRAWING	MOD N°		
site	Recentacl	e 8D seri	ies			
	e Receptacle 8D series					
ar :			/ PROJECT 359		1	
	This document is the property of SOURIAU					
J	.COM it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
M0	2SN-C			1/2	J	
	В		A			

r	Ŧ	۵		П	m	Ū	0	
		Contact Layout						Panel Cutou
4	.× .0 (2.	+Y IB IA IA IA IA IA +X 95 (2.4imm)					SQUARE FLANGE RECEPTACLE REAR MOUNTING	
	Coni posil IE A B Shell Arrangement size no. 11 -2	ion X-axis Y-axis (mm) (mm) +.095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	Contact location All				F	Dim
ω								ØA ØAA R1 ØT
							due to a us the Specification	Il not be liable for an se of the Products wh ns issued by either of sional recommendat
N								PN: 8D011N
_							0-2016 First Release ATE Latest modificat Date	
_						SCALE NA	E Contraction of the second se	General linear Tolerances: ±
						FORMAT	IAU WWW	v.souriau.c
	Н	G		F	E	D A3	C	8D011M

