


REV. 1 4/8/99  
DCO 102124

COIL: @ 25°C  
 RESISTANCE 7600 OHMS ± 10%  
 NOMINAL VOLTAGE 120.0 VDC  
 MUST OPERATE 65.0 VDC  
 MUST RELEASE 36.1 VDC MAX, 7.7 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.  
CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

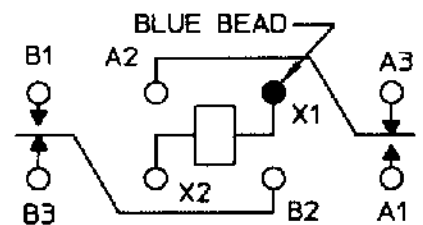

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC  
5 AMPS 115 VAC/400 Hz RESISTIVE  
100,000 OPERATIONS

DR. R.B. 12/11/98 CK. *[Signature]*

**COMMUNICATIONS  
INSTRUMENTS, INC.**

CUST. QPL  
 CUST. NO. M5757/23-030

TYPE '07' RELAY

**B07D034BE2-0135**