

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	39014021	MiniFit Jr SR Recpt Hsg 2 CKT V-0	2	PC
C	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	4	PC
D	--	RESIN BLEND STPRNE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	2CX16AWG UNSHD BK UL2464	BLACK
A2	B2		RED

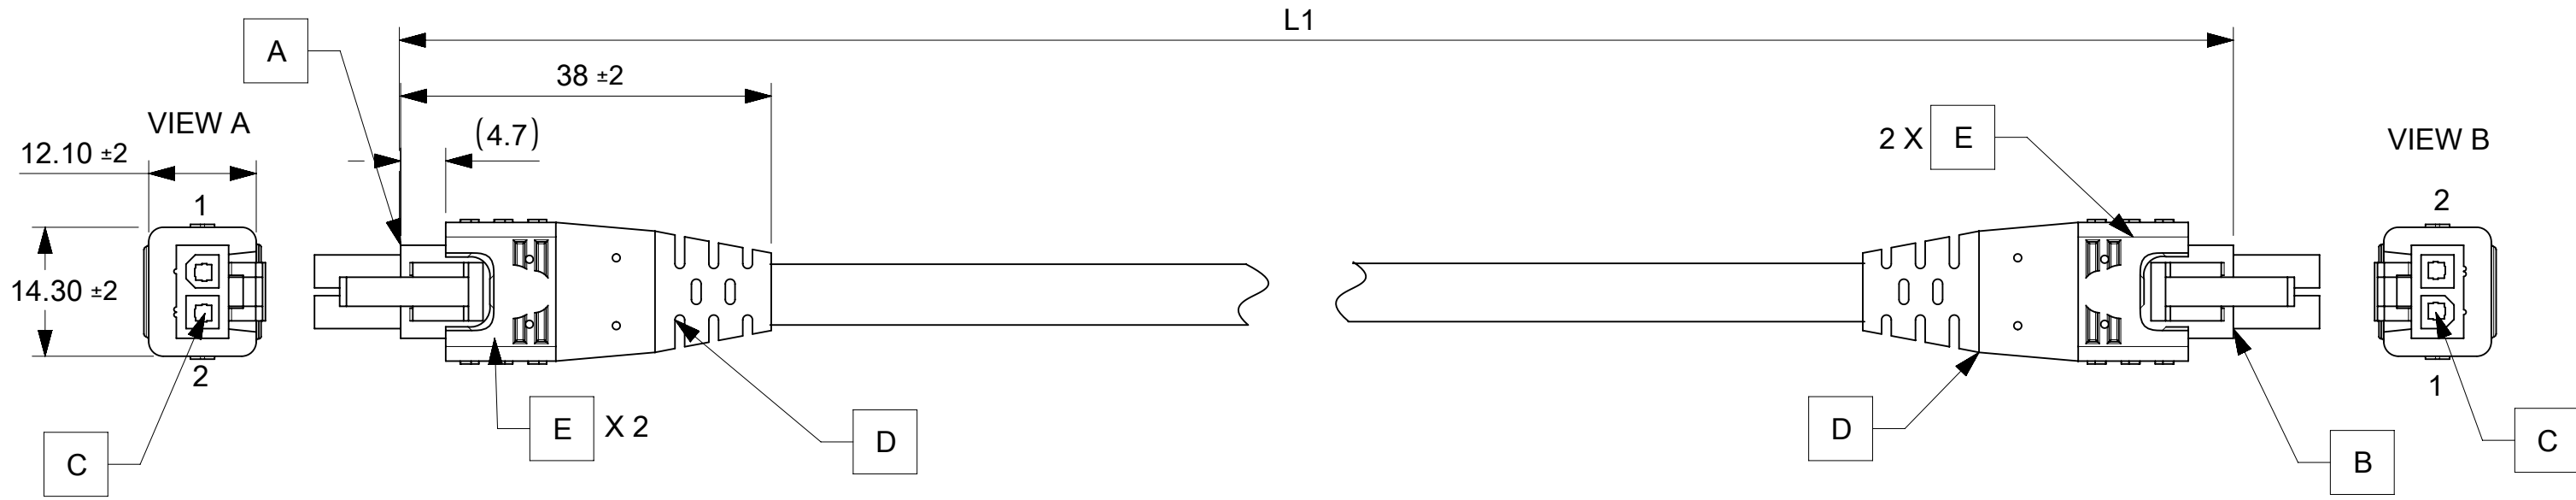


TABLE		
PART NUMBER	TITLE	L1
2153300205	2 CKT OVERMOLDED MINIFIT JR CABLE 500MM	500±10
2153300210	2 CKT OVERMOLDED MINIFIT JR CABLE 1M	1000±20
2153300220	2 CKT OVERMOLDED MINIFIT JR CABLE 2M	2000±25
2153300230	2 CKT OVERMOLDED MINIFIT JR CABLE 3M	3000±30

NOTES:

- MOLDING MATERIAL:
 - INNERCAP: PA66 NYLON RESIN.
 - OVERMOLD: SANTOPRENE TPE RESIN.
- ELECTRICAL PERFORMANCE:
 - VOLTAGE RATING: 300V AC.
 - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
 - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
 - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
 - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
 - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		molex																						
	<table border="1"> <tr> <th>FUNCTIONAL SYMBOLS</th> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td>$\nabla_A = 0$</td> <td>mm</td> <td>NTS</td> </tr> <tr> <td>$\nabla_E = 0$</td> <td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td>$\nabla_{E'} = 0$</td> <td colspan="2">ANGULAR TOL ± °</td> </tr> <tr> <td rowspan="5">DIVISIONAL SYMBOLS</td> <td>4 PLACES</td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> </tr> </table>	FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE	$\nabla_A = 0$	mm	NTS	$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		$\nabla_{E'} = 0$	ANGULAR TOL ± °		DIVISIONAL SYMBOLS	4 PLACES	±	3 PLACES	±	2 PLACES	±	1 PLACE	±	0 PLACES	±	EC NO: 740245 DRWN: PRAVES6 CHK'D: SKUMAR07 APPR: SKUMAR07 INITIAL REVISION: DRWN: SBS04 APPR: MNARAYAN01
FUNCTIONAL SYMBOLS	DIMENSION UNITS	SCALE																								
$\nabla_A = 0$	mm	NTS																								
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)																									
$\nabla_{E'} = 0$	ANGULAR TOL ± °																									
DIVISIONAL SYMBOLS	4 PLACES	±																								
	3 PLACES	±																								
	2 PLACES	±																								
	1 PLACE	±																								
	0 PLACES	±																								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION	SHEET NUMBER															
			A3-SIZE	215330	SEE TABLE	GENERAL MARKET	2153300205	PSD	000	C	1 OF 1															