
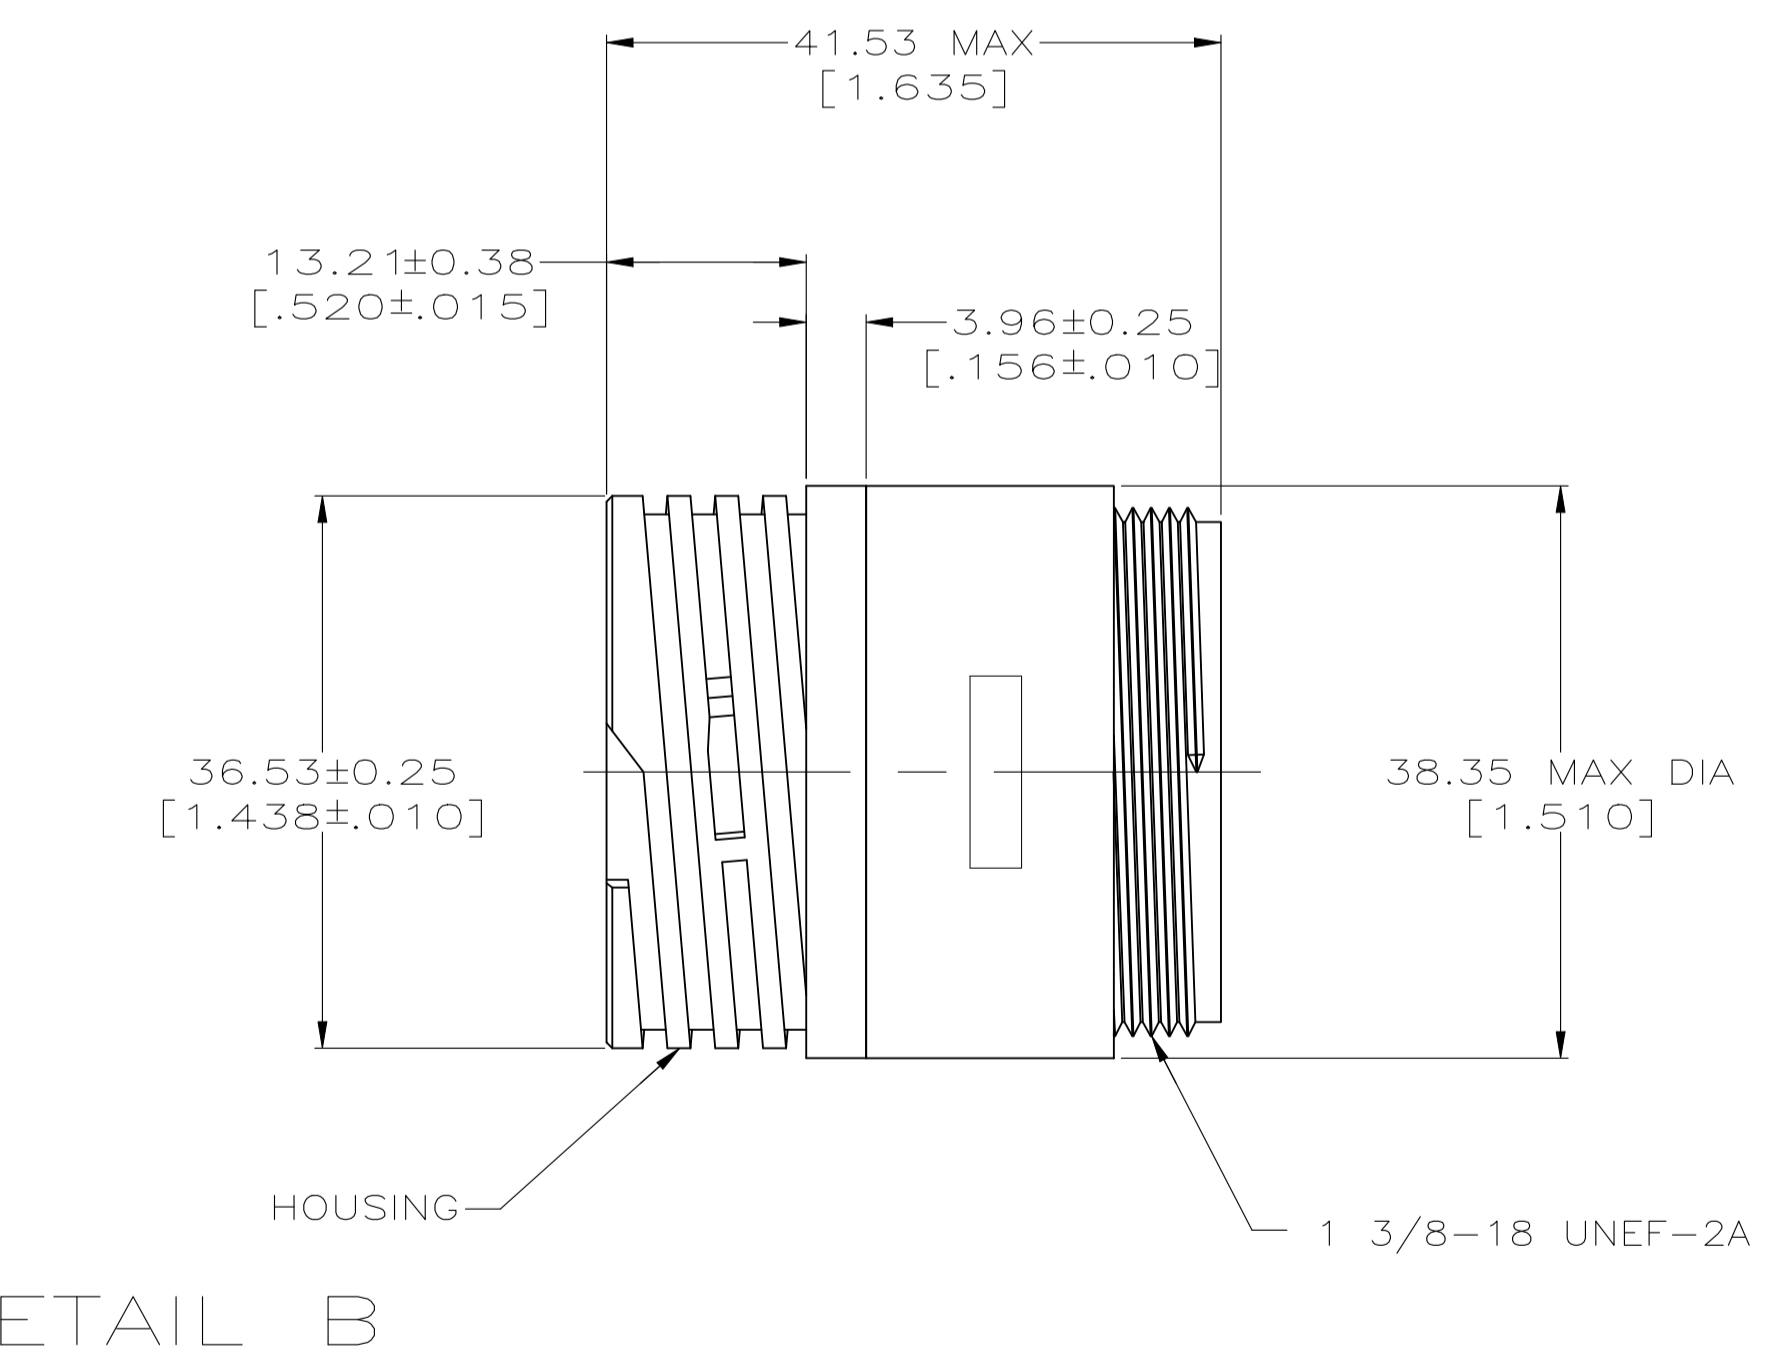
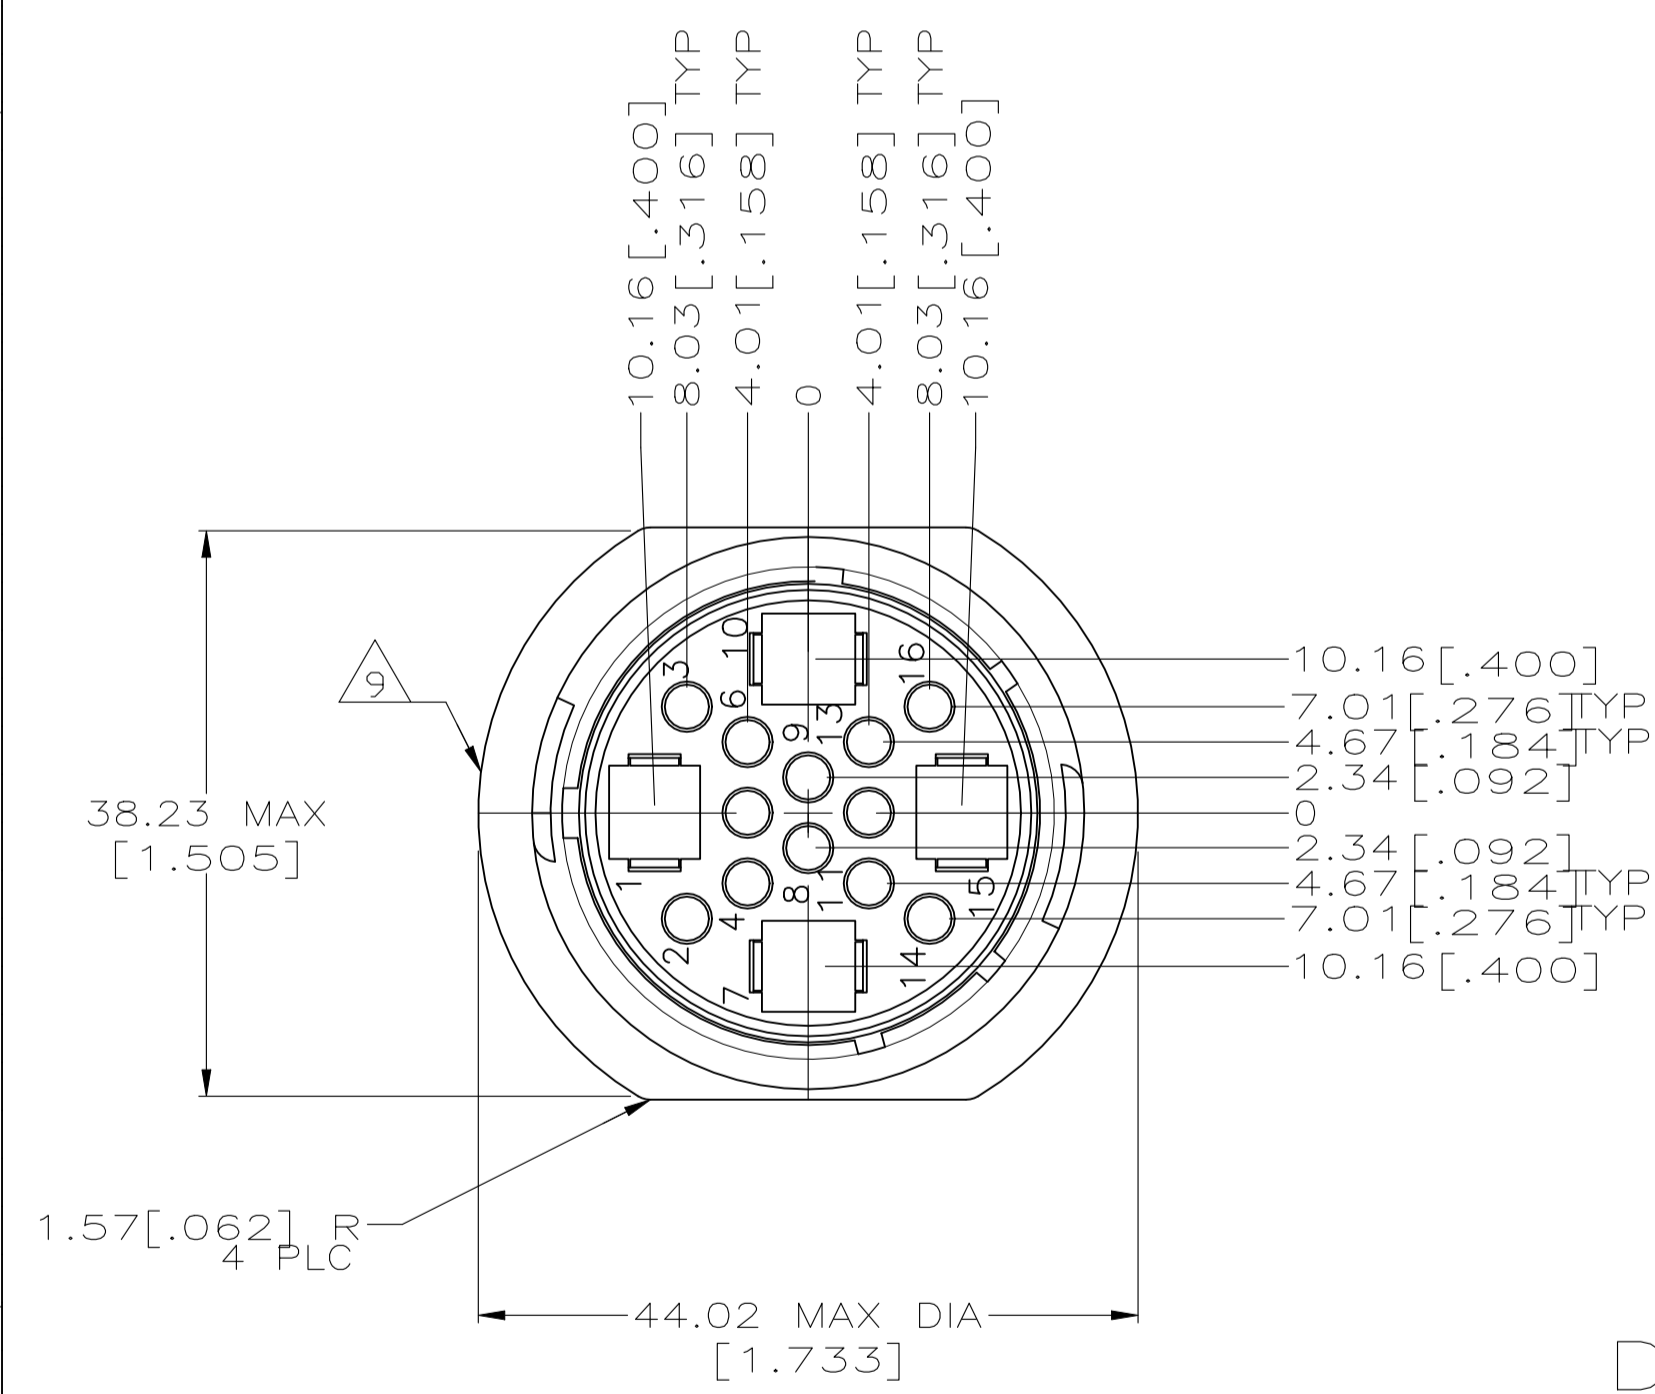
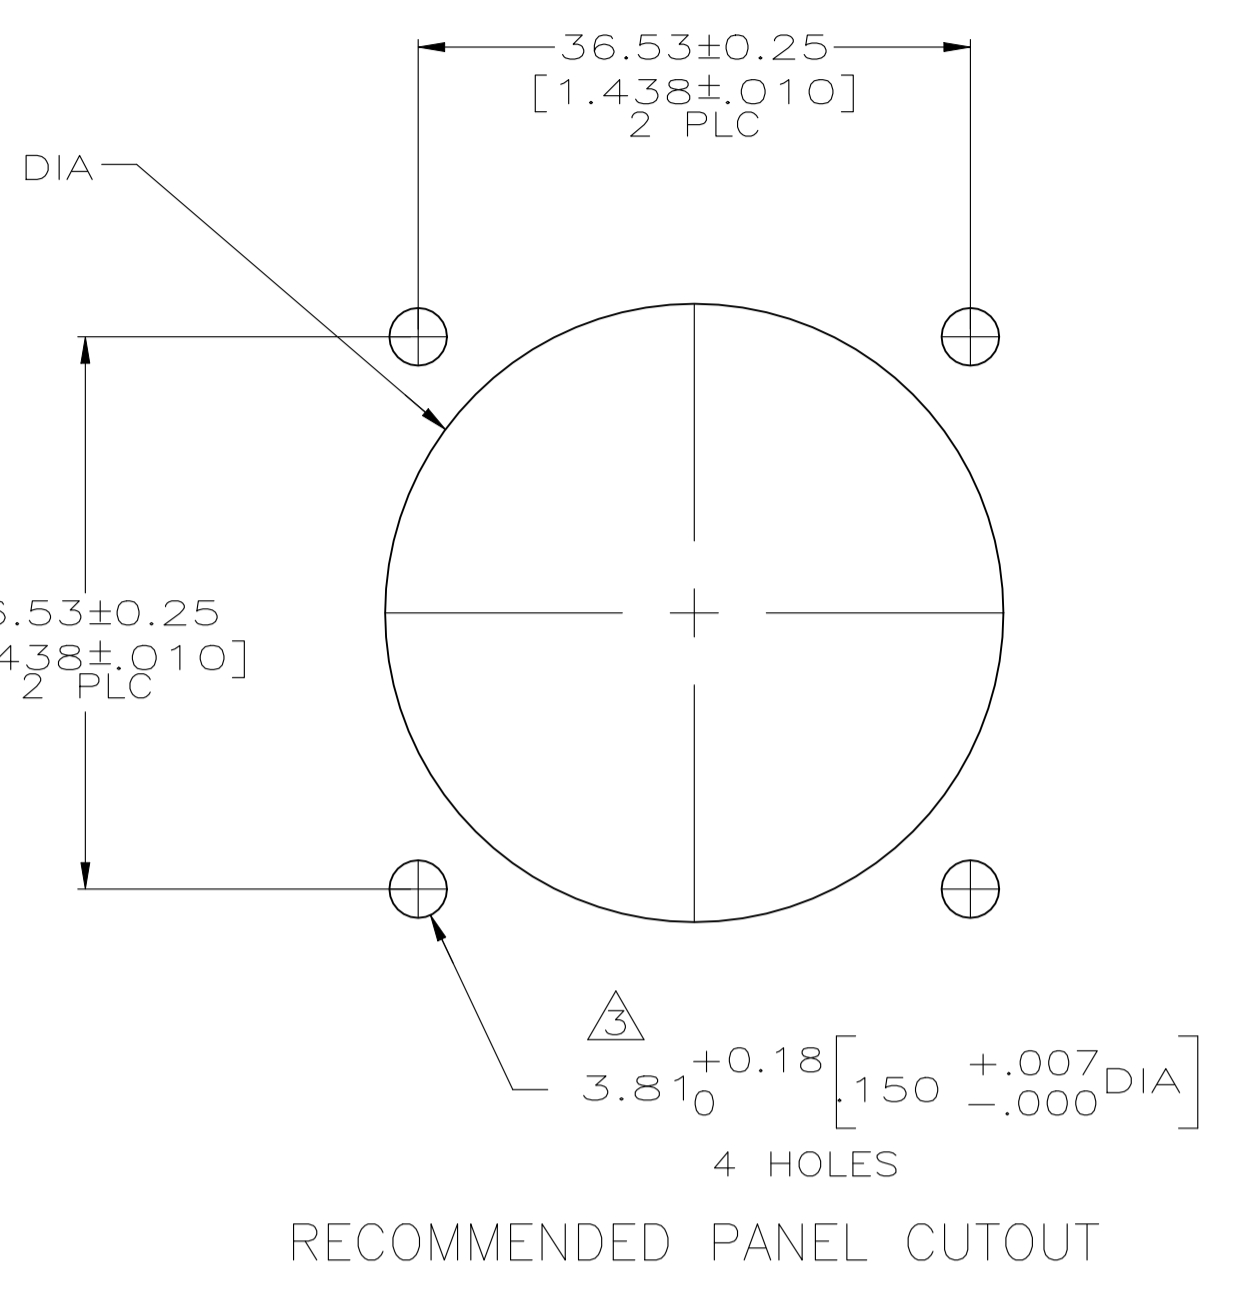
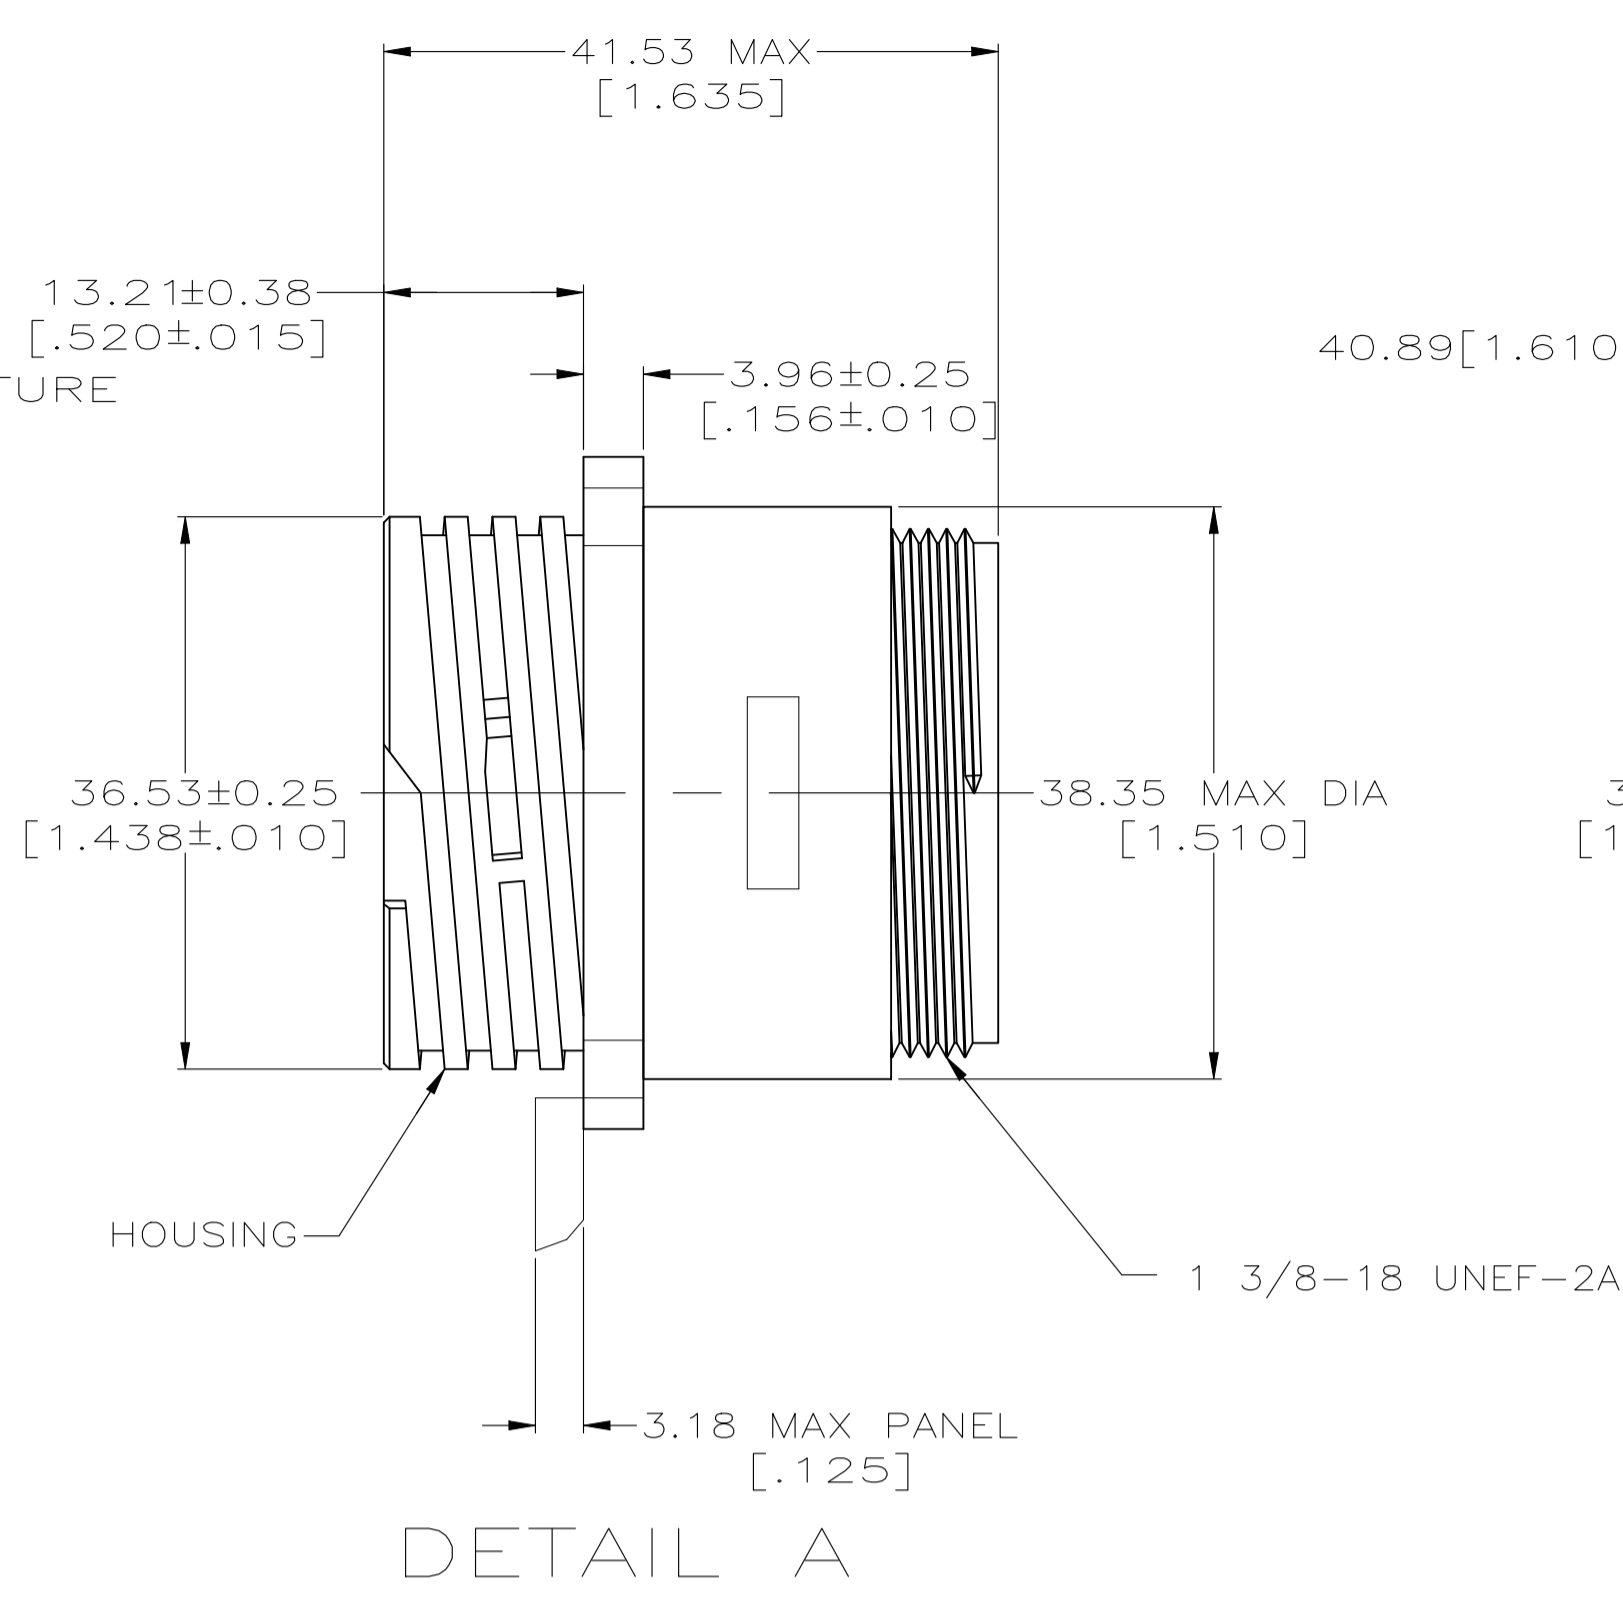


REVISIONS				
P	LTR	DESCRIPTION	DATE	BY
U		REVISED PER ECO-21-006945	28OCT2021	RK MZ

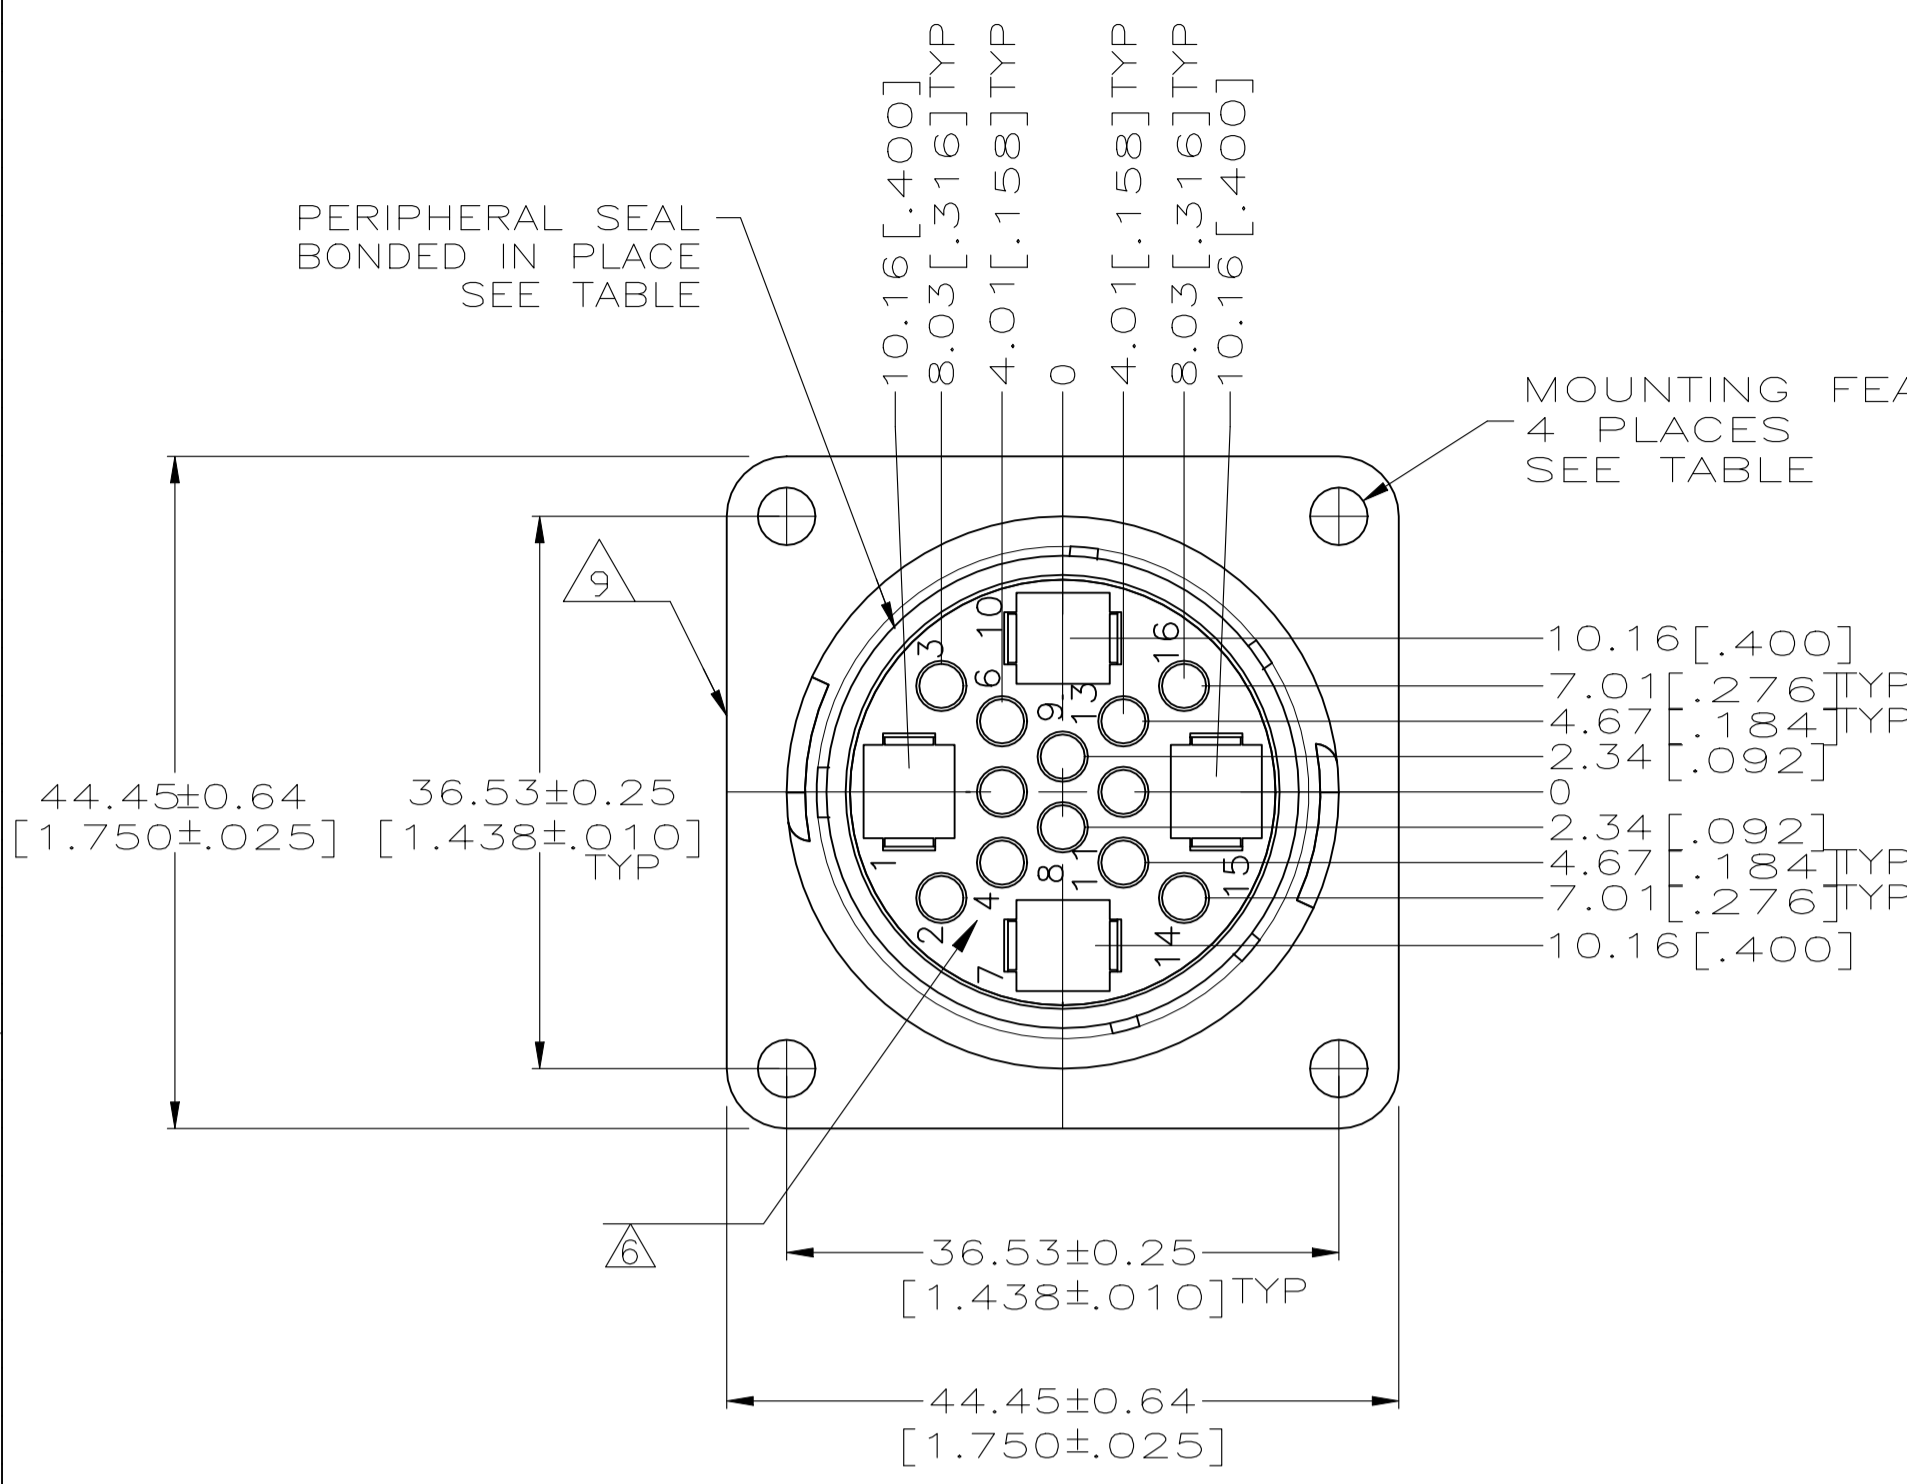

- WILL ACCEPT (12) MULTIMATE AND (4) TYPE XII PIN CONTACTS.
 - CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
 - NO. 4 FASTENERS RECOMMENDED FOR MOUNTING.
 - THIS CONNECTOR WILL ACCEPT INSULATION DIAMETERS UP TO 3.81 [1.50].
- HOUSING: NYLON, BLACK.
 - PERIPHERAL SEAL: ELASTOMER, BLACK.
 - THREADED INSERT: BRASS
 - PERMANENT WHITE MARKED OR WHITE INK STAMPED CAVITY IDENTIFICATION.
 - HOUSING: NYLON, RED.
 - PERIPHERAL SEAL: ELASTOMER, GRAY.
 - WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

TE LOGO AND PART NUMBER LOCATED ON ANY FLANGE EDGE

NOTES	MOUNTING FEATURES	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER
OBsolete	#4-40 THREADED INSERTS	NO	A	1-207486-2
OBsolete	Ø 3.81+/-0.08(.125+/-0.003) HOLES	YES	A	1-207486-1
PRELIMINARY	Ø 3.81+/-0.08(.125+/-0.003) HOLES	YES	A	207486-9
	Ø 3.81+/-0.08(.125+/-0.003) HOLES	YES	A	207486-7
	#4-40 THREADED INSERTS	YES	A	207486-6
	Ø 3.81+/-0.08(.125+/-0.003) HOLES	YES	A	207486-5
	Ø 3.81+/-0.08(.125+/-0.003) HOLES	NO	B	207486-2
	Ø 3.81+/-0.08(.125+/-0.003) HOLES	NO	A	207486-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN M. BINNER 05/26/94	6-23-94
0 PLC ± -	1 PLC ± -	2 PLC ± 0.13 [.005]	3 PLC ± -
4 PLC ± -	ANGLES ± -	APVD R. STONE	
MATERIAL	FINISH	PRODUCT SPEC 108-10024	APPLICATION SPEC
		SIZE A1	SCALE 2:1
		WEIGHT	SHEET 1 of 1
		CUSTOMER DRAWING	REV U

RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC

TE Connectivity