# 1744109-4 ACTIVE

## **Economy Power**

TE Internal #: 1744109-4


Rectangular Power Connectors, Header, Cap, Wire-to-Board, 9 Position, 3.96 mm [.156 in] Centerline, Printed Circuit Board, UL

94HB, Economy Power

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

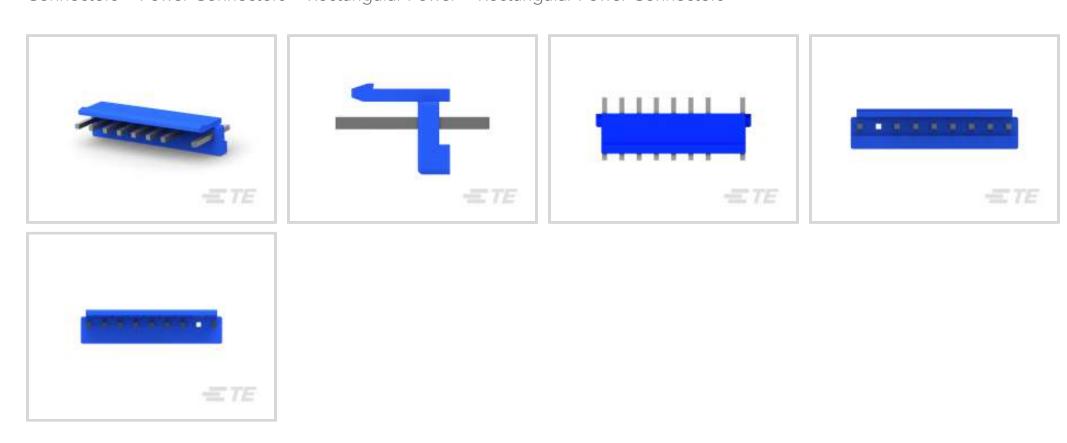

Rectangular Power Connector Type: Header

Connector & Housing Type: Cap
Connector System: Wire-to-Board

Number of Positions: 9

Centerline (Pitch): 3.96 mm [.156 in]

## **Features**

## **Product Type Features**

Header Type	Partially Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Cap
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	9
PCB Mount Orientation	Vertical
Number of Power Positions	9
Number of Rows	1
Number of Rows  Electrical Characteristics	1

250 VDC

## **Contact Features**

Operating Voltage



Mating Post Length	7.7 mm[.303 in]
PCB Contact Termination Area Plating Material Thickness	1 μm[39.36 μin]
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Base Material	Brass
Contact Current Rating (Max)	8 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]
Termination Features	
Termination Post & Tail Length	3.7 mm[.145 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Strain Relief	Without
Mating Retention	With
Mating Alignment	Without
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	PBT GF
Dimensions	
Product Width	8.5 mm[.334 in]
Product Length	35.58 mm[1.4 in]
Usage Conditions	
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
Operation/Application	



Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94HB
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Method	Bag

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**









3.96 EP PLUG HSG 9P(NATURAL)

TE Part # 1744416-9 9 POS EP II HSG, GLOW WIRE

TE Part # 1744427-9 EP Header Asy, Shrouded, 9 Pos, GW

TE Part # 1-2316952-9 3.96 EP HDR ASSY 9P, NO PIN 2,4,5



-ETE TE Part # 1744107-2





3.96 EPHDR ASSY 7P OMIT #3 PIN

TE Part # 1744428-9 3.96 EP HDR ASSY 9P R/A, GW

TE Part # 7-1123723-1 3.96 EP HDR ASSY 11P(NATURAL GWT)

## Also in the Series | Economy Power










Connector Contacts(1)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(162)

PCB Latches, Locks & Retainers(2)



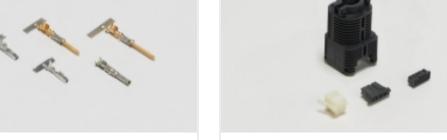






Power Contacts(8)

Rectangular Connector Housings(1)

Rectangular Power Connectors(302)

Wire-to-Board Connector Assemblies & Housings(142)

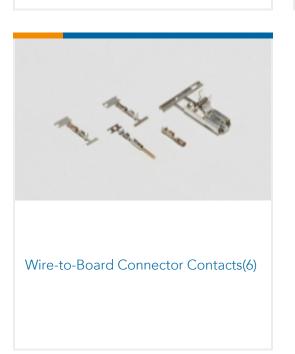

# Customers Also Bought





TE Part #440052-6 AMP HPI 2.5 mm Headers



TE Part #42579-1 250 FASTON REC 16-12 AWG NPST



TE Part #63674-1 250 FASTON REC 18-14 AWG NPST



TE Part #2-1123723-4
3.96 EP HDR ASSY 4P(YELLOW)





## **Documents**

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1744109-4\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1744109-4\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1744109-4\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## **Product Specifications**

**Application Specification** 

English