


**D-SUBMINIATURE CONNECTORS:**

**KF66X Series**

Right Angle PCB Mount With Ferrite

**KF66X Series Dimensions**

Dimensions in mm

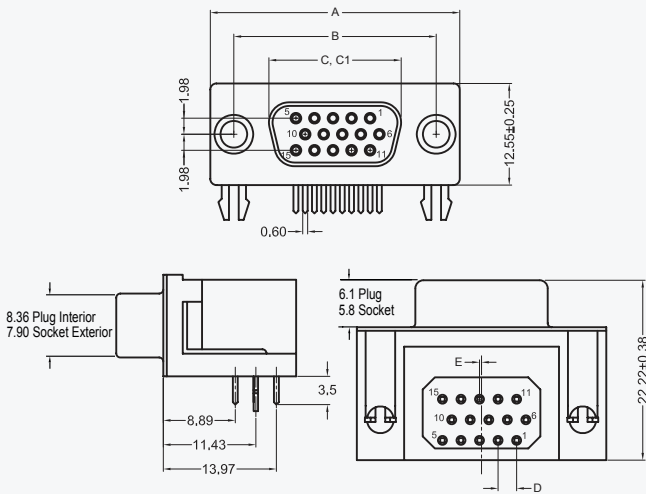

Shell Size	A	B	C	C1	D	E	
	In	± .015	± .005	± .010	± .010	± .005	± .005
	mm	± 0.38	± 0.13	± 0.25	± 0.25	± 0.13	± 0.13
15 (E)	1.213 30.81	.984 24.99	.643 16.33	.666 16.92	.090 2.29	.010 0.25	
26 (A)	1.541 39.14	1.312 33.32	.971 24.66	.994 25.25	.090 2.29	.020 0.51	
44 (B)	2.088 53.04	1.852 47.04	1.511 38.38	1.534 38.96	.090 2.29	.020 0.51	

C = Exterior of Female Shell (S)

C1 = Interior of Male Shell (P)

**Electrical Characteristics**

**Rated Current:** 1.5A

**Rated Voltage:** 29Vac


Generated Part Number

**KF66X-E15P-N30**

Part Number Builder

KF66X	-	E15	P	N	30
Series		Shell Size Contact	Contact Type	Mounting Option	Plating Option

**Series**

**KF66X** - High Density D-Subminiature Connector, Right Angle PCB Termination, 0.350" Footprint, with Ferrite

**Shell Size-Contact Option**

- 15 Contacts
- 26 Contacts
- 44 Contacts

**Contact Type**

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

**Mounting Option**

- N - With Boardlocks and #4-40 UNC Threaded Insert
- NJ - With Boardlocks and #4-40 Jackscrews Installed

**Plating Option**

- Blank - Gold Flash
- 30 - 30µ" Gold

Contact Kycon for VESA and Other Options