

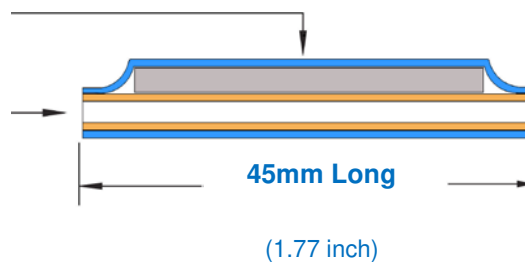
Product supplied is Clear




## PS-3A-X45

Fiber optic fusion splice protector sleeve

### Product Dimensions

Sleeve Diameter After Shrinkage	<b>2.4 mm</b> (0.095 inch)
Supplied Internal Diameter	<b>1.4 mm</b> (0.055 inch)
Single fiber size	<b>250 to 900 µm</b>
Reinforcing Member	<b>Stainless Steel Rod 1.0mm</b> (0.04 inch)
Color	<b>Clear</b>
Package Quantity	<b>Bag 50</b>



-  Heat Shrink Outer Polyolefin Tube
-  Hot-Melt Adhesive Inner Tube
-  Stainless Steel Reinforcing Rod

### Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- Encapsulated and centred reinforcing pin with tapered ends
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most optic fibers, splice trays and splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

